


FEATURES

- Differential Output Topology
- DC Output Offset Control (external loop)
- Low Group Delay
- DC Coupled Outputs
- -5.2V Power Supply
- InGaP HBT Technology

APPLICATIONS

- SONET OC-192/STM-64
- 10Gb/s DWDM
- 10Gb/s Datacom

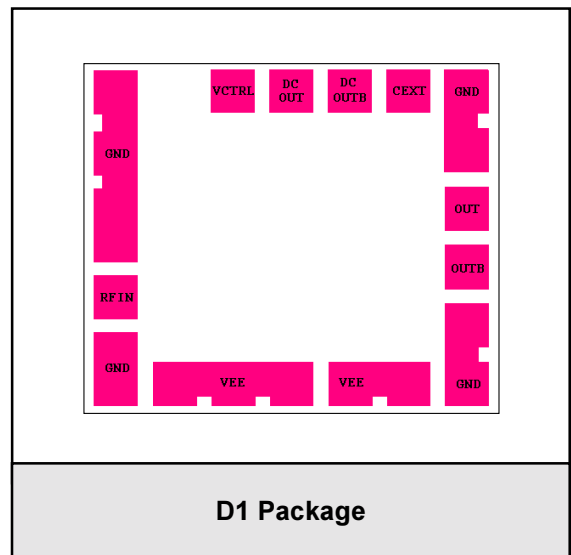


PRODUCT DESCRIPTION

The ANADIGICS ATA7602 is a -5.2V high speed transimpedance amplifier (TIA) for 10Gb/s applications available in bare die form and manufactured using an InGaP HBT process. The device is used in conjunction with a photodetector to convert an optical signal into a differential voltage

that can be AC or DC coupled to a post amplifier. The DC offset between the two outputs can be adjusted in order to maintain low duty cycle distortion for large signal operation or to provide an adjustable decision threshold for the post amplifier.

Figure 1: Block Diagram

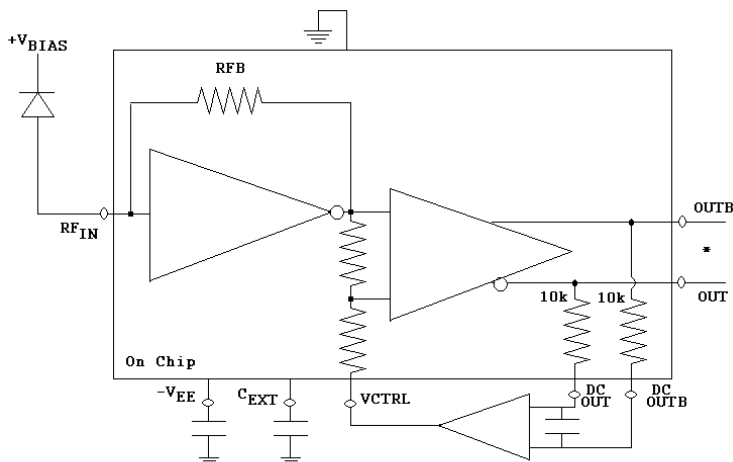

*Terminate unused port (50 ohms)

Absolute Maximum Ratings

PARAMETER	MIN	TYP	MAX	UNIT
DC Power supply (V _{EE})	-7.0		1.0	V
Storage Temperature	-65		125	°C
DC Input Current			3.0	mA

Operating Conditions

PARAMETER	MIN	TYP	MAX	UNIT
Operating Voltage Range	-5.50	-5.2	-4.90	V
Operating Temperature Range	-40		85	°C
Photodiode Capacitance (PIN + stray)			0.3	pF
Series Resistance (Bondwire + anode)			15	Ω
Bondwire Inductance			1.0	nH

DC Characteristics

PARAMETER	MIN	TYP	MAX	UNIT
Supply Current (DC Coupled)		115	155	mA
Input DC Voltage		-3.9		V
Output DC Voltage		-0.4		V

AC Electrical Characteristics ($V_{EE}=-5.2V\pm 0.3V$, $C_{DIODE}+C_{STRAY}=0.3pF$, $L_{BOND}=0.7nH$)

PARAMETER	MIN	TYP	MAX	UNIT
Small Signal Differential Transimpedance ($R_L = 100\Omega$)	2000	2200		Ω
Maximum Output Voltage Swing ($R_L = 50\Omega$)	600	700	800	mVpp
Input Current @ 80% Output Saturation	550			μA_{pp}
Bandwidth (-3dB; $I_{input} \leq 1.65mA_{pk-pk}$)	8.5	9.5		GHz
Low Frequency Cutoff ⁽¹⁾⁽⁴⁾		30		kHz
Group Delay Deviation (30kHz to 8.0GHz) ⁽¹⁾	-15		+15	ps
Group Delay Deviation (30kHz to F_c) ⁽¹⁾	-25		+25	ps
Optical Sensitivity (with a PIN Photodiode) ⁽²⁾⁽³⁾⁽⁴⁾⁽⁵⁾		-19		dBm
Optical Overload (with a PIN Photodiode) ⁽²⁾⁽³⁾⁽⁴⁾	0			dBm
Output Return Loss (10MHz to F_c)		-15	-12	dB
Output Return Loss (F_c to 20GHz)			-5	dB

(1) Optical input power = -19 to 0dBm, $F_c = 9.5GHz$

(2) Responsivity of the photodiode = 0.95A/W typical, laser extinction ratio=10dB

(3) BER: 10^{-10} ; 9.95328Gbps NRZ pattern; PRBS $2^{31}-1$, $\lambda=1.55\mu m$

(4) External 1nF Capacitor Required (C_{ext} : see figure 3)

(5) Measurements made in reference fixture with open cavity fiber alignment. Improvements in coupling will result in better performance.

Pad Description

PAD	Description	Comment
V_{EE1}, V_{EE}	Negative Supply Voltage	-5.2V
RF_{IN}	TIA Input	Connect to detector anode
DC OUT	Non-inverted DC Output Voltage	Feeds into External Op-amp for Offset control
DC OUTB	Inverted DC Output Voltage	Feeds into External Op-amp for Offset control
V_{CTRL}	Offset Control	Use to set relative DC offset between the output ports
C_{EXT}	Pad for bonding external capacitor to ground in order to set low freq. Cutoff)	Choose Capacitor using the attached chart
OUT	TIA Output Voltage (Non-inverted)	Logical '1' with optical input
OUTB	TIA Output Voltage (Inverted)	Logical '0' with optical input

Figure 2: Die Size and layout

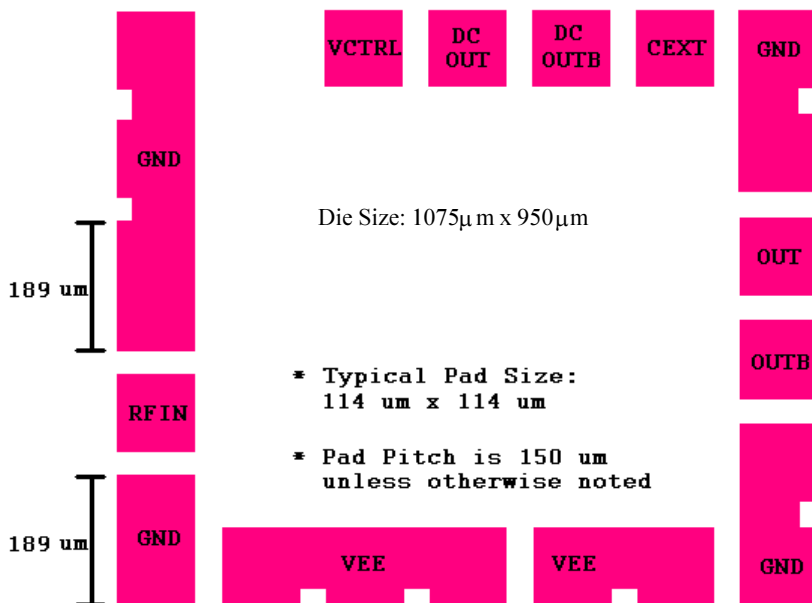


Figure 3: Calculated External Capacitor Size vs. Low Frequency Cutoff

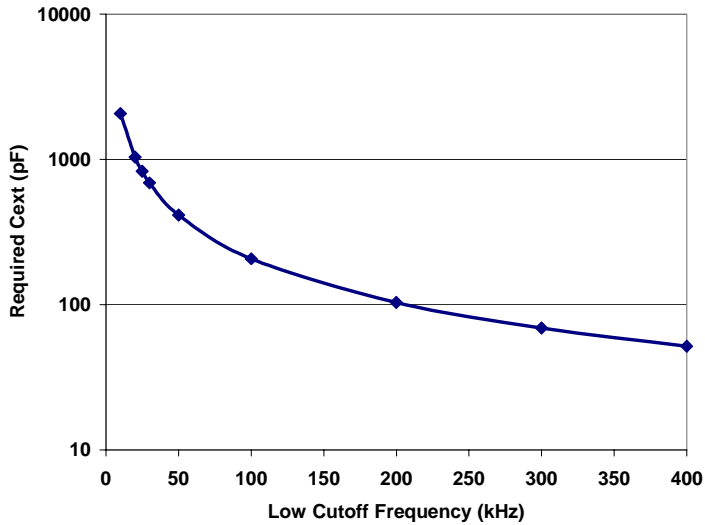


Figure 4: Simulated Bandwidth

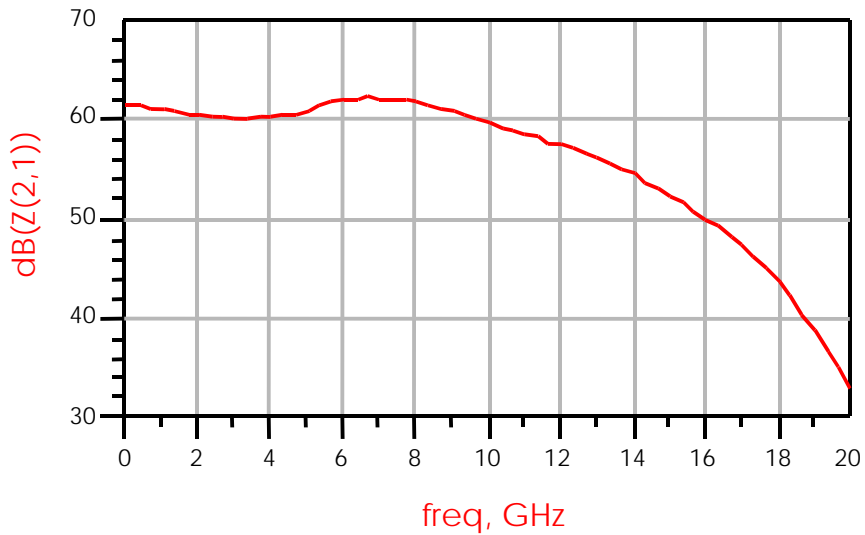


Figure 5: Simulated Group Delay

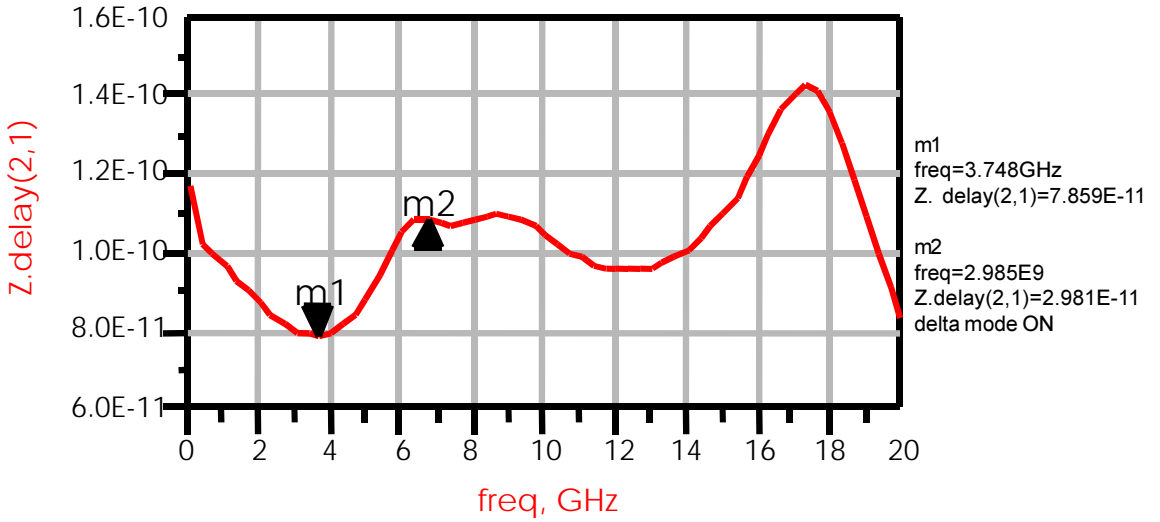


Figure 6: Simulated Bandwidth and Group Delay vs. Input Inductance


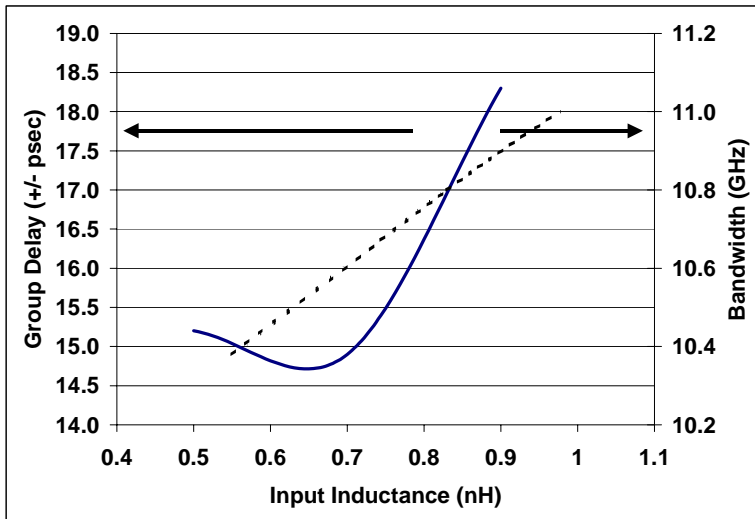


Figure 7: Simulated Output Return Loss



Ordering Information

Part Number	Package Option	Package Description
ATA7602D1	D1	Die

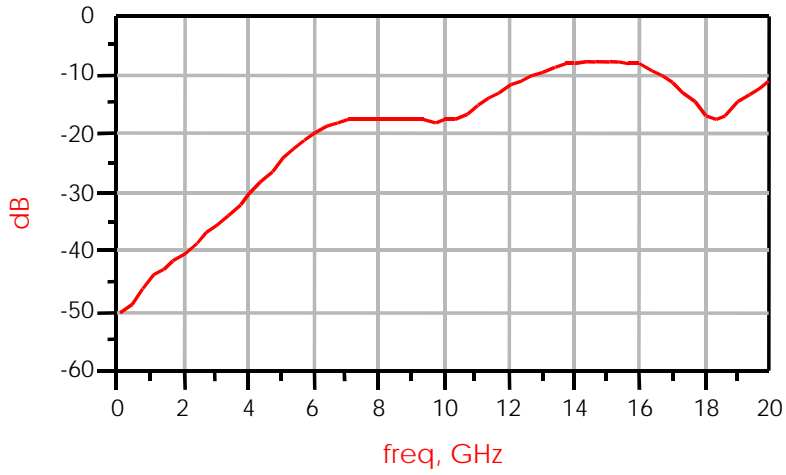

ANADIGICS, Inc.

141 Mount Bethel Road

Warren, New Jersey 07059, U.S.A

Tel: +1 (908) 668-5000

Fax: +1 (908) 668-5132

<http://www.anadigics.com>

Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or discontinue any product at any time without notice. The Advanced Product data sheets and product specifications contained in this data sheet are subject to change prior to a products formal introduction. The information in this data sheet has been carefully checked and is assumed to be reliable. However, ANADIGICS assumes no responsibility for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.