

## VIDEO CAMERA AUTO-IRIS FUNCTION

## ■ GENERAL DESCRIPTION

The NJM2225 are bipolar integrated circuits of motor drive for video camera. The NJM2225 have function of auto iris by video-luminance signal and external information input to AGC circuit. They are composed of clipping circuit of video luminance signal, amplifier for driving motor and comparator for AGC circuits.


## ■ FEATURES

- Operating Voltage (+4.5V~+11V)
- Internal Auto Iris Circuit
- Package Outline DMP16, ZIP16, SSOP16
- Bipolar Technology

## ■ RECOMMENDED OPERATING CONDITION


- Operating Voltage 4.5~11V

## ■ PIN CONFIGURATION

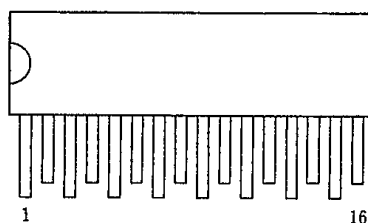


NJM2225S


## ■ PACKAGE OUTLINE




NJM2225S



NJM2225V



NJM2225M

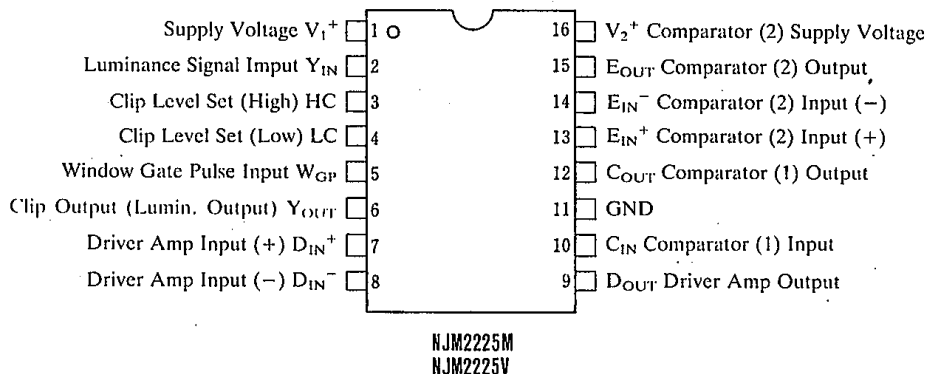

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	12	V
Motor Drive Current	I <sub>o</sub>	30	mA(PIN.9)
Power Dissipation	P <sub>D</sub>	(ZIP16) 500	mW
		(DMP16) 350	mW
		(SSOP16) 350	mW
Operating Temperature Range	T <sub>opr</sub>	-20~+75	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	°C


## ■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, V<sub>1</sub><sup>+</sup>=9V, V<sub>2</sub><sup>+</sup>=9V)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I <sub>CC</sub>		—	5.0	8.0	mA
Pin 3 Clip HIGH Level	V <sub>CLH</sub>	V <sub>5</sub> =5V	2.82	2.90	2.98	V
Pin 3 Clip LOW Level	V <sub>CLL</sub>	V <sub>5</sub> =0V	2.27	2.35	2.43	V
Pin 5 Threshold Level	V <sub>TH</sub>		0.7	1.4	2.1	V
7-9 Open Loop Gain	G <sub>0</sub>	R <sub>L1</sub> =1kΩ (Pin 9-V <sup>+</sup> )	80	90	—	dB
Pin 9 Output Operating Voltage	V <sub>9L</sub>	R <sub>L1</sub> =1kΩ (Pin 9-V <sup>+</sup> )	1.4	1.5	1.6	V
Pin 10 DC Level	V <sub>10</sub>		1.9	2.1	2.3	V
AGC Clip Level	V <sub>12CL</sub>	R <sub>L2</sub> =15kΩ	3.80	4.00	4.20	V
Pin 15 Saturation Level	V <sub>15L</sub>	E <sub>IN</sub> <sup>+</sup> =2V, E <sub>IN</sub> <sup>-</sup> =2.1V, R <sub>L3</sub> =5kΩ	—	0.2	0.4	V
Pin 15 OFF Level	V <sub>15H</sub>	E <sub>IN</sub> <sup>+</sup> =2V, E <sub>IN</sub> <sup>-</sup> =1.9V, R <sub>L3</sub> =5kΩ	8.9	9.0	—	V

5

## ■ TEST CIRCUIT

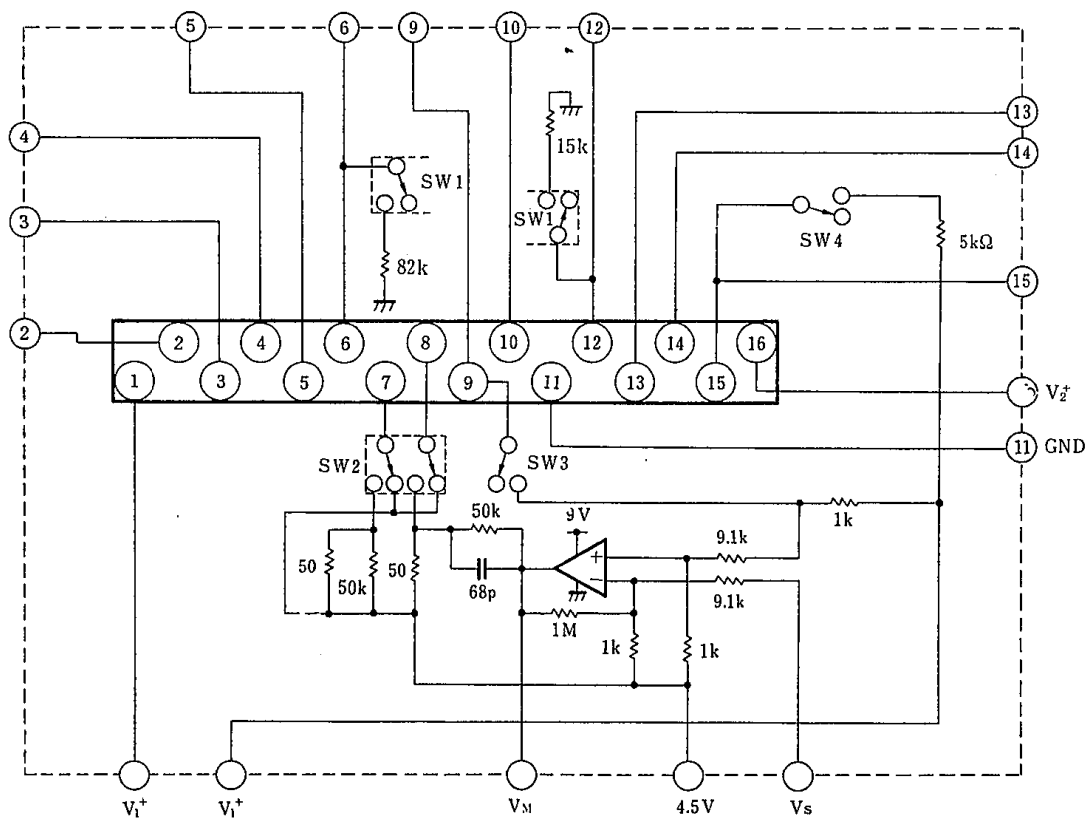

■ TEST CONDITION

PARAMETER	TEST CONDITION	
Operating Current	$V_1^+ = V_2^+ = 9V$ ⑤-GND, ⑬⑭-4.5V SW1~SW4-OFF Other Pins-OPEN	
(Clip Circuit)	SW1~SW4-OFF	
Pin 3 Clip HIGH Level	⑤-5V	③ Voltage Test
Pin 3 Clip LOW Level	⑤-0V	③ Voltage Test
Pin 5 Threshold Level	⑤-0.8V	③ Voltage Test Clip Level 1
	⑤-2.0V	③ Voltage Test Clip Level 2
(Driver-Amp Circuit)	SW2, SW3-ON	
7-9 Open Loop Gain	Vs-6V,	VM Value; A
	Vs-3V,	VM Value; B
	O.L.Gain=20LOG [3000/(A-B)]	
Pin 9 Output Operating Voltage	Vs-0.5V	⑨ Voltage Test
	SW3-ON	
(Comparator Circuit)		
Pin 10 DC Level	⑩ Voltage Test	
AGC Clip Level	SW1~SW3-ON	
	Vs-8V	⑫ Voltage Test
(External Comparator Circuit)		
Pin 15 Saturation Level	SW4-ON	
	⑬-2V	
	⑭-2.1V	⑮ Voltage Test
Pin 15 OFF Level	⑬-2V	
	⑭-1.9V	⑮ Voltage Test





## ■ TERMINAL FUNCTION

( $V_1^+=9V$ ,  $V_2^+=9V$ )

PIN NO.	PIN SYMBOL	EQUIVALENT CIRCUITS	PIN VOLTAGE[V]	PIN DESCRIPTION
1	$V_1^+$	—	9.0	Operating Voltage
2	$Y_{IN}$		2.38	Luminance signal input. Lum. sig. level: 0.5Vp-p.
3	HC		2.35	Setting clip level (High). No connect at $V^+=9V$ .
4	LC		0.6	Setting clip level (Low). No connect at $V^+=9V$ .
5	$W_{GP}$		0	Input window gate pulse. The pulse:
6	$Y_{OUT}$		2.35	Clipped luminance signal Output.
7	$D_{IN}^+$		—	Input driver amp signal (+) of luminance converted to DC level.
8	$D_{IN}^-$		—	Input driver amp signal (-) of iris motor threshold voltage.
9	$D_{OUT}$		—	Driver amp output which drive driver coil of iris motor.


## ■ TERMINAL FUNCTION

( $V_1^+ = 9V$ ,  $V_2^+ = 9V$ )

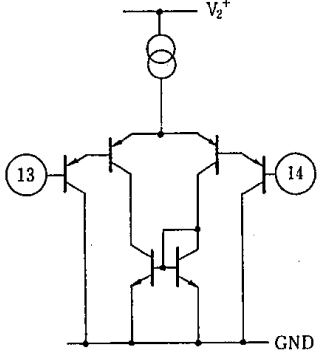
PIN NO.	PIN SYMBOL	EQUIVALENT CIRCUITS	PIN VOLTAGE[V]	PIN DESCRIPTION
10	$C_{IN}^-$		2.09	Level set of COMP (1) which judges on-off condition of iris. No connect at $V^+ = 9V$ .
11	GND	—	0	GND
12	$C_{OUT}$		0	Comparator (1) output which is signal to AGC circuit. Can drive TTL with 15kΩ load (4V/0V).
13	$E_{IN}^+$		—	Comparator (2) input (+)
14	$E_{IN}^-$		—	Comparator (2) input (—)
15	$E_{OUT}$		—	Comparator (2) output
16	$V_2^+$	—	9.0	Supply terminal to comparator (2)

5

## TYPICAL APPLICATION

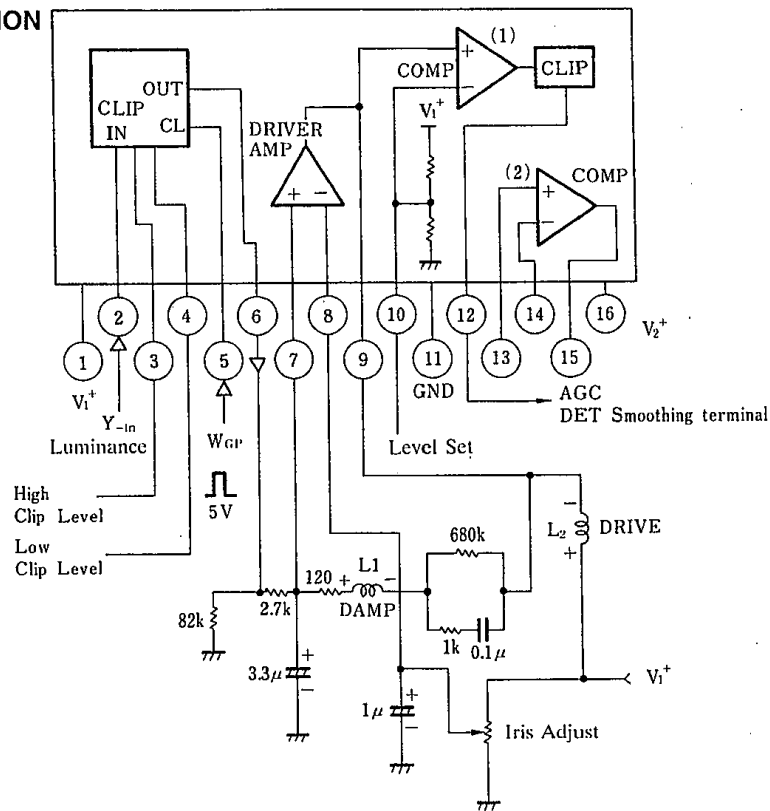

## BRIEF OPERATION PRINCIPLE

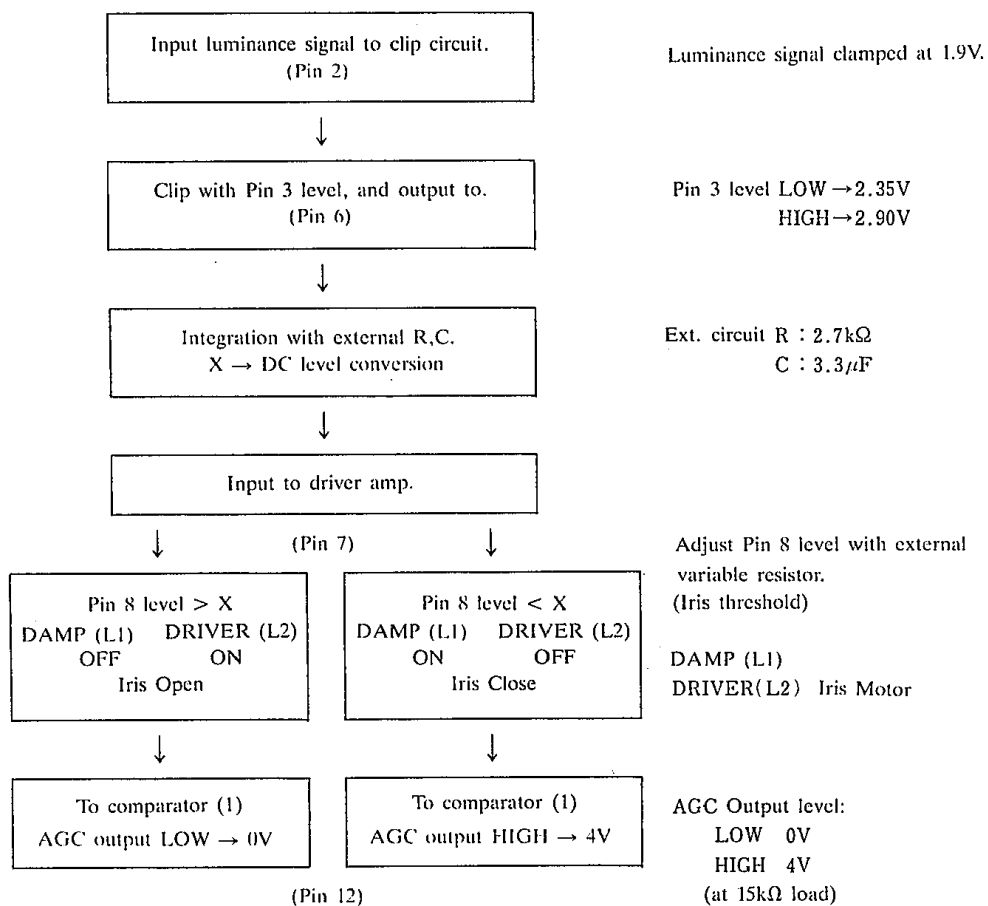

■ EXTERNAL CIRCUIT

EXTERNAL DEVICE	OPERATION DESCRIPTION
Pin6-Pin7 resistor 2.7k $\Omega$ Pin7-GND capacitor 3.3 $\mu$ F	Integrating video luminance signal, and convert to DC level.
Pin7-L1 resistor 120 $\Omega$	Control iris motor speed.
Pin8 -Pin9 RC 680k $\Omega$ , 1k $\Omega$ , 0.1 $\mu$ F	To prevent miss operation of motor by vertical synchronous signal, low-pass filter acts as negative feedback circuit.
Pin8-GND capacitor 1 $\mu$ F	AC ground
V <sub>I</sub> <sup>+</sup> -GND Variable resistor	Set threshold value of iris-motor start.

■ NOTE


- When used at V<sub>I</sub><sup>+</sup>=9V, not connect pin3, pin4, pin10.



## ■ TYPICAL CHARACTERISTICS


### Operating Current

( $T_a = 25^\circ\text{C}$ )

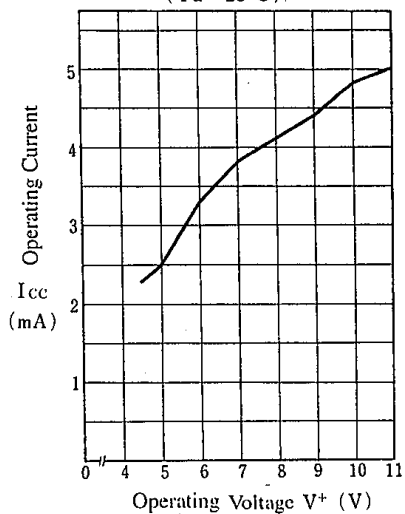


### Clip Level (Pin 3)

( $T_a = 25^\circ\text{C}$ )

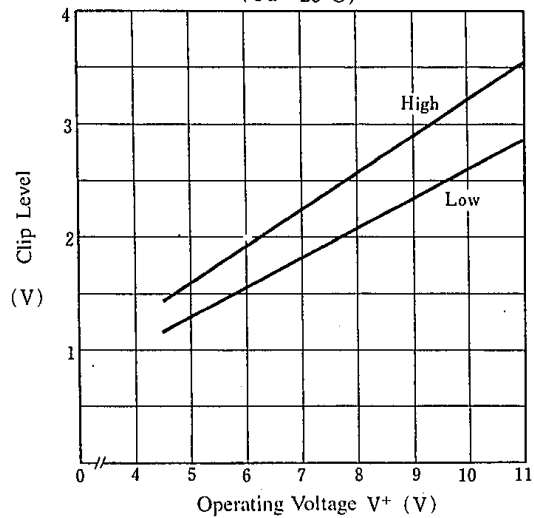


### Threshold Level (Pin 5)

( $T_a = 25^\circ\text{C}$ )

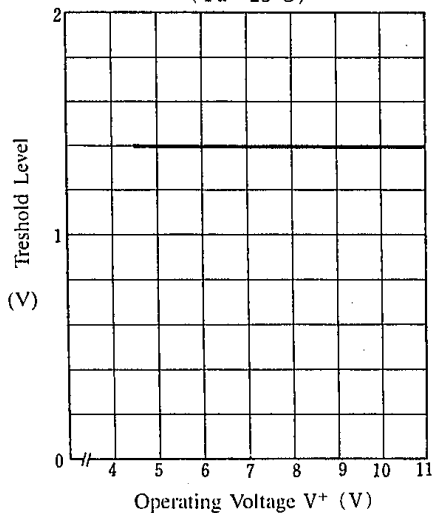


### Open Loop Gain (Pin 7-Pin 9)

( $T_a = 25^\circ\text{C}$ )

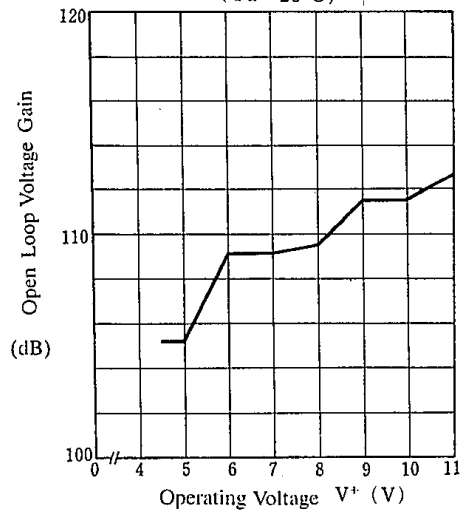


### Driver Amp Operating Voltage Level (Pin 9)

( $T_a = 25^\circ\text{C}$ )


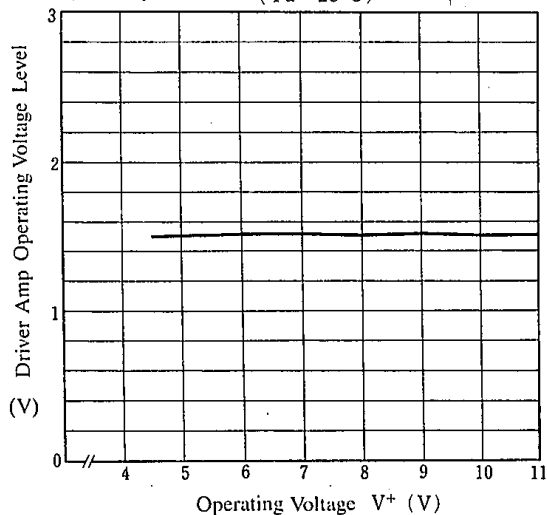


### Comparator (1) Input DC Level (Pin 10)

( $T_a = 25^\circ\text{C}$ )

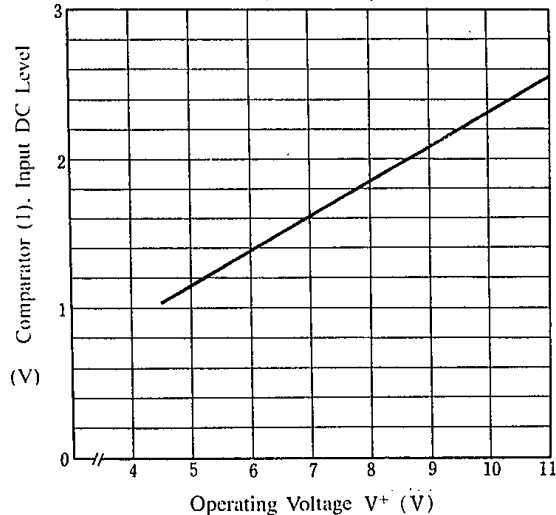


■ TYPICAL CHARACTERISTICS

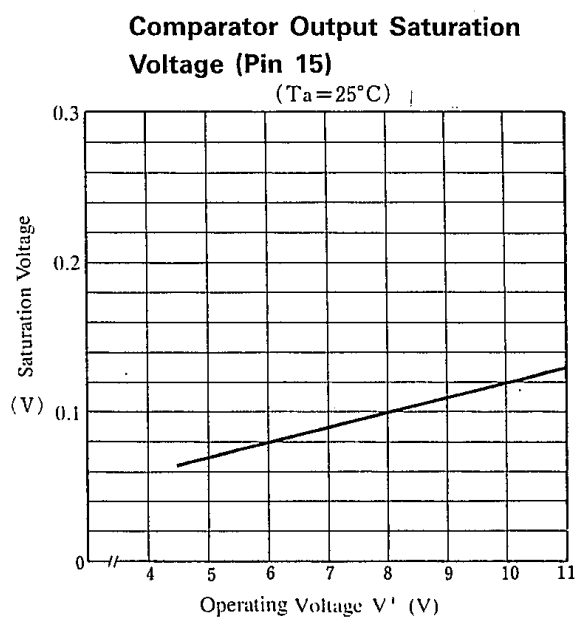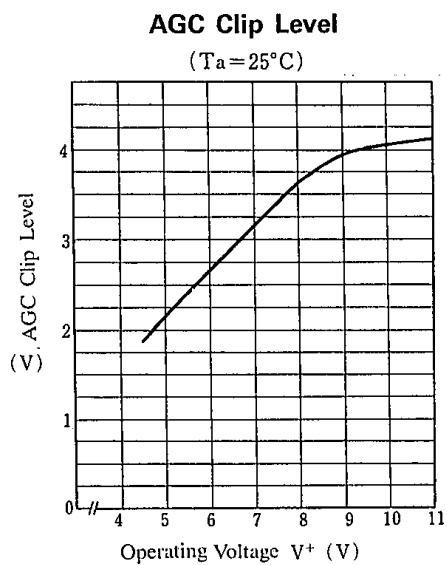

# NJM2225

## ■APPLICATION

This IC requires  $1\text{M}\Omega$  resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

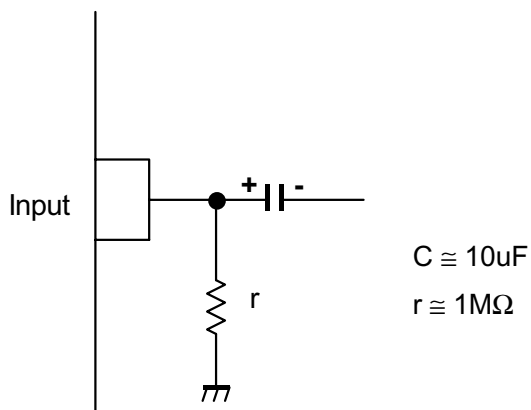

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.