



	LCB110	Units
Load Voltage	350	V
Load Current	120	mA
Max R <sub>ON</sub>	30	Ω

### Features

- Small 6 Pin DIP Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- No Moving Parts
- High Reliability
- Arc-Free With No Snubbing Circuits
- 3750V<sub>RMS</sub> Input/Output Isolation
- FCC Compatible
- VDE Compatible
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable
- Surface Mount and Tape & Reel Versions Available

### Applications

- Telecommunications
  - Telecom Switching
  - Tip/Ring Circuits
  - Modem Switching (Laptop, Notebook, Pocket Size)
- Hookswitch
- Dial Pulsing
- Ground Start
- Ringer Injection
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
- Medical Equipment-Patient/Equipment Isolation
- Security
- Aerospace
- Industrial Controls

### Description

The LCB110 is a 1-Form-B relay which uses optically coupled MOSFET technology to provide 3750V of input to output isolation. The efficient MOSFET switches and photovoltaic die use Clare's patented OptoMOS<sup>®</sup> architecture. A highly efficient GaAIAs infrared LED controls the optically coupled input. The LCB110 has low on resistance and is well suited for most applications requiring a normally closed relay. The device is available in small 6-pin dual in line package in standard through hole and surface mount lead bend.

### Approvals


- UL Recognized: File Number E76270
- CSA Certified: File Number LR 43639-10
- BSI Certified to:
  - BS EN 60950:1992 (BS7002:1992) Certificate #: 7344
  - BS EN 41003:1993 Certificate #: 7344

### Ordering Information


Part #	Description
LCB110	6 Pin DIP (50/Tube)
LCB110S	6 Pin Surface Mount (50/Tube)
LCB110STR	6 Pin Surface Mount (1000/Reel)

### Pin Configuration


**LCB110 Pinout**  
AC/DC Configuration



**LCB110 Pinout**  
DC Only Configuration



### Switching Characteristics of Normally Closed (Form B) Devices



**Absolute Maximum Ratings (@ 25° C)**

Parameter	Min	Typ	Max	Units
Input Power Dissipation	-	-	150 <sup>1</sup>	mW
Input Control Current	-	-	50	mA
Peak (10ms)	-	-	1	A
Reverse Input Voltage	-	-	5	V
Total Power Dissipation	-	-	800 <sup>2</sup>	mW
Isolation Voltage Input to Output	3750	-	-	V <sub>RMS</sub>
Operational Temperature	-40	-	+85	°C
Storage Temperature	-40	-	+125	°C
Soldering Temperature DIP Package	-	-	+260	°C
Surface Mount Package (10 Seconds Max.)	-	-	+220	°C

<sup>1</sup> Derate Linearly 1.33 mw/°C

<sup>2</sup> Derate Linearly 6.67 mw/°C


*Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for an extended period may degrade the device and effect its reliability.*

**Electrical Characteristics**


Parameter	Conditions	Symbol	Min	Typ	Max	Units
<b>Output Characteristics @ 25°C</b>						
Load Voltage (Peak)	-	V <sub>L</sub>	-	-	350	V
Load Current (Continuous) AC/DC Configuration	-	I <sub>L</sub>	-	-	120	mA
DC Configuration	-	I <sub>L</sub>	-	-	200	mA
Peak Load Current	10ms	I <sub>L</sub>	-	-	350	mA
On-Resistance AC/DC Configuration	I <sub>L</sub> =120mA	R <sub>ON</sub>	-	23	35	Ω
DC Configuration	I <sub>L</sub> =200mA	R <sub>ON</sub>	-	7	10	Ω
Off-State Leakage Current	V <sub>L</sub> =350V	I <sub>LEAK</sub>	-	-	1	μA
Switching Speeds Turn-On	I <sub>F</sub> =5mA, V <sub>L</sub> =10V	T <sub>ON</sub>	-	-	3	ms
Turn-Off	I <sub>F</sub> =5mA, V <sub>L</sub> =10V	T <sub>OFF</sub>	-	-	3	ms
Output Capacitance	50V; f=1MHz	C <sub>OUT</sub>	-	25	-	pF
<b>Input Characteristics @ 25°C</b>						
Input Control Current	I <sub>L</sub> =120mA	I <sub>F</sub>	5	-	50	mA
Input Dropout Current	-	I <sub>F</sub>	0.4	0.7	-	mA
Input Voltage Drop	I <sub>F</sub> =5mA	V <sub>F</sub>	0.9	1.2	1.4	V
Reverse Input Voltage	-	V <sub>R</sub>	-	-	5	V
Reverse Input Current	V <sub>R</sub> =5V	I <sub>R</sub>	-	-	10	μA
Input to Output Capacitance	-	C <sub>I/O</sub>	-	3	-	pF
Input to Output Isolation	-	V <sub>I/O</sub>	3750	-	-	V <sub>RMS</sub>

PERFORMANCE DATA\*


**LCB110**  
Typical LED Forward Voltage Drop  
(N=50 Ambient Temperature = 25°C)  
 $I_F = 5\text{mADC}$

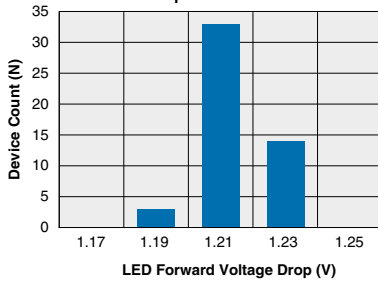


**LCB110**  
Typical On-Resistance Distribution  
(N=50 Ambient Temperature = 25°C)  
(Load Current = 120mADC)

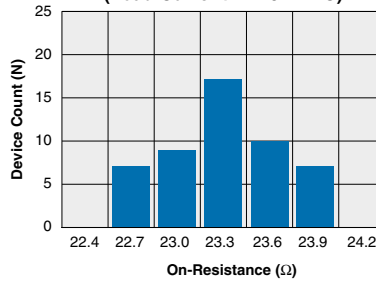


**LCB110**  
Typical Blocking Voltage Distribution  
(N=50 Ambient Temperature = 25°C)  
 $I_F = 5\text{mA}$

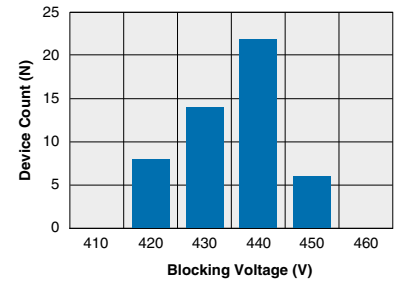


**LCB110**  
Typical  $I_F$  for Switch Operation  
(N=50 Ambient Temperature = 25°C)  
(Load Current = 120mADC)

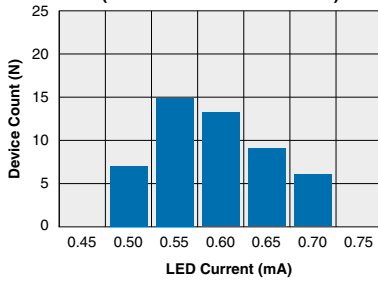


**LCB110**  
Typical  $I_F$  for Switch Dropout  
(N=50 Ambient Temperature = 25°C)  
(Load Current = 120mADC)

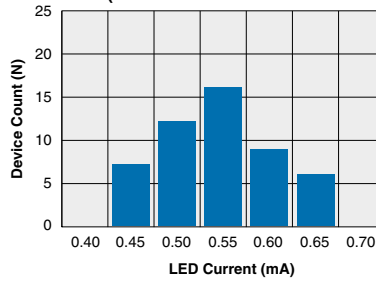


**LCB110**  
Typical Turn-On Time  
(N=50 Ambient Temperature = 25°C)  
(Load Current = 120mADC;  $I_F = 5\text{mADC}$ )

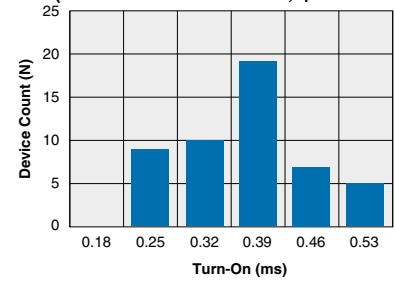


**LCB110**  
Typical Turn-Off Time  
(N=50 Ambient Temperature = 25°C)  
(Load Current = 120mADC;  $I_F = 5\text{mADC}$ )

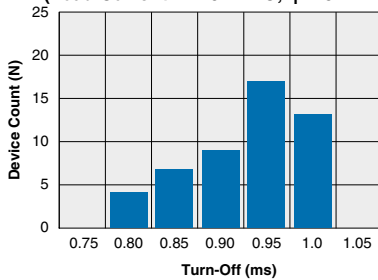


**LCB110**  
Typical Load Current vs. Temperature

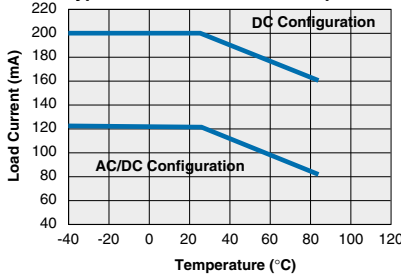


**LCB110**  
Typical Leakage vs. Temperature  
(Measured across Pins 5 & 6 or 7&8)

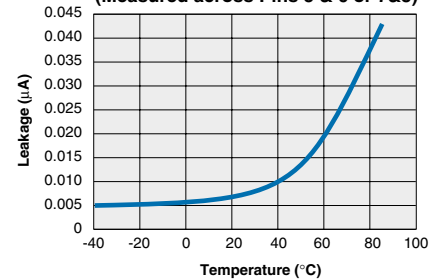


**LCB110**  
Typical Blocking Voltage vs. Temperature  
( $I_F = 5\text{mA}$ )

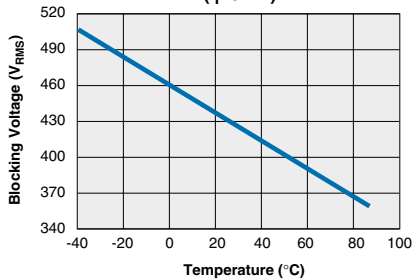

**LCB110**  
Typical Turn-On vs. Temperature  
(Load Current = 120mADC)









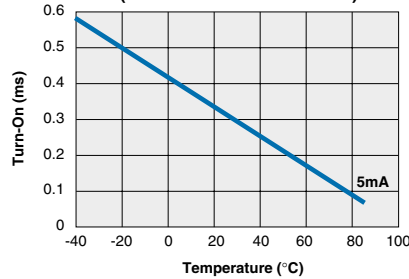


**LCB110**  
Typical Turn-Off vs. Temperature  
(Load Current = 120mADC)

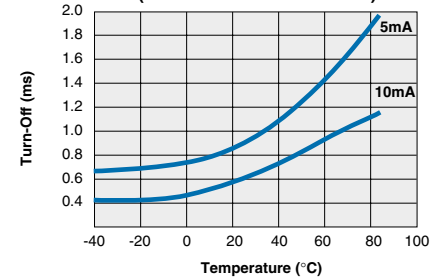

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.


PERFORMANCE DATA\*

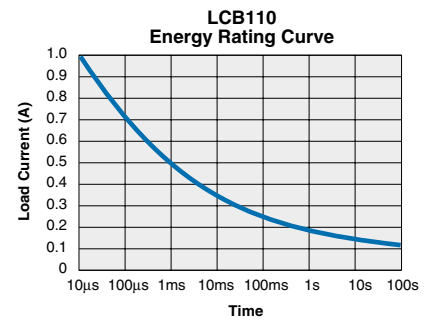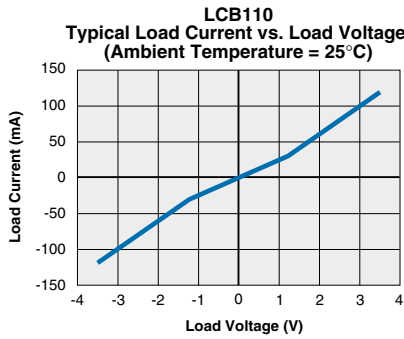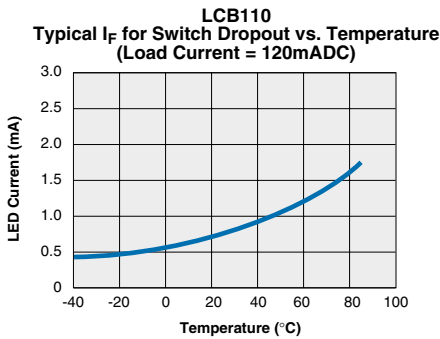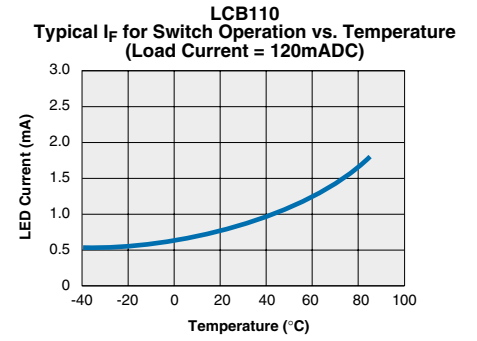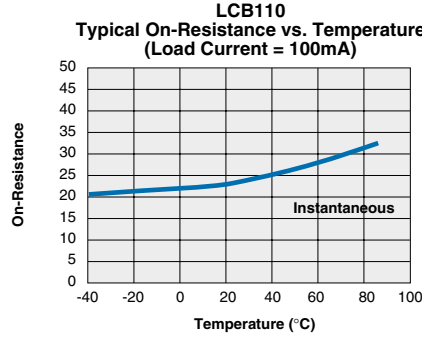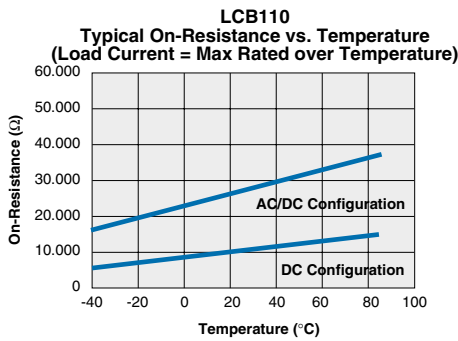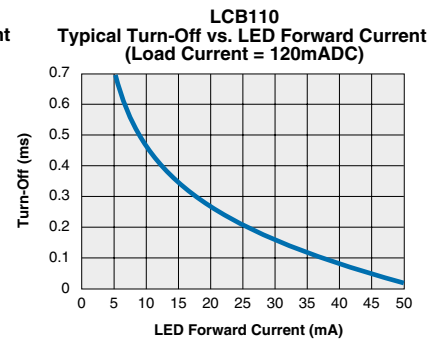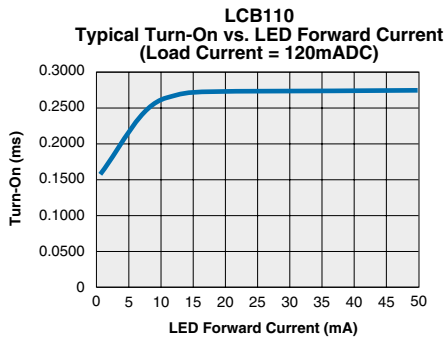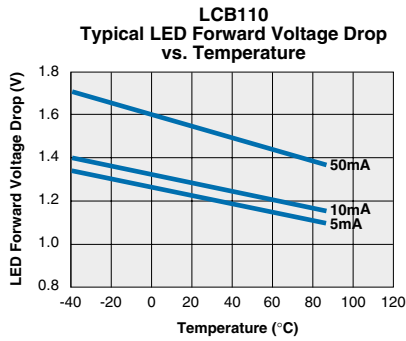


\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

MECHANICAL DIMENSIONS


6 Pin DIP Surface Mount ("S" Suffix)

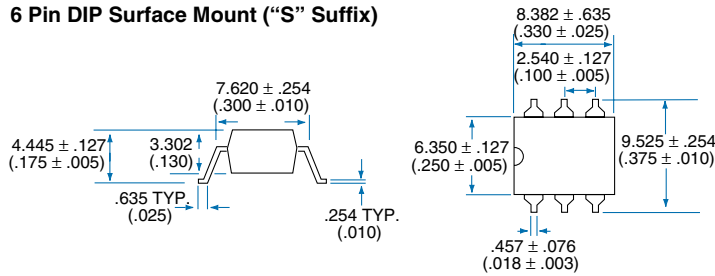


PC Board Pattern (Top View)




6 Pin DIP Through Hole (Standard)

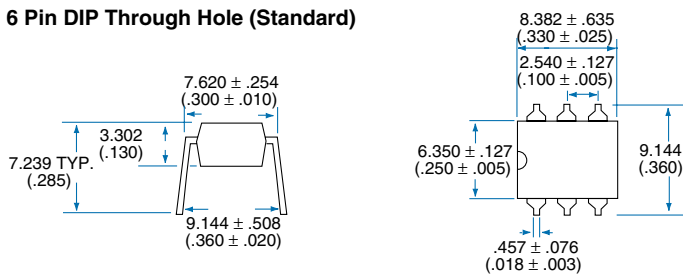

PC Board Pattern (Top View)



Tape and Reel Packaging for 6 Pin Surface Mount Package

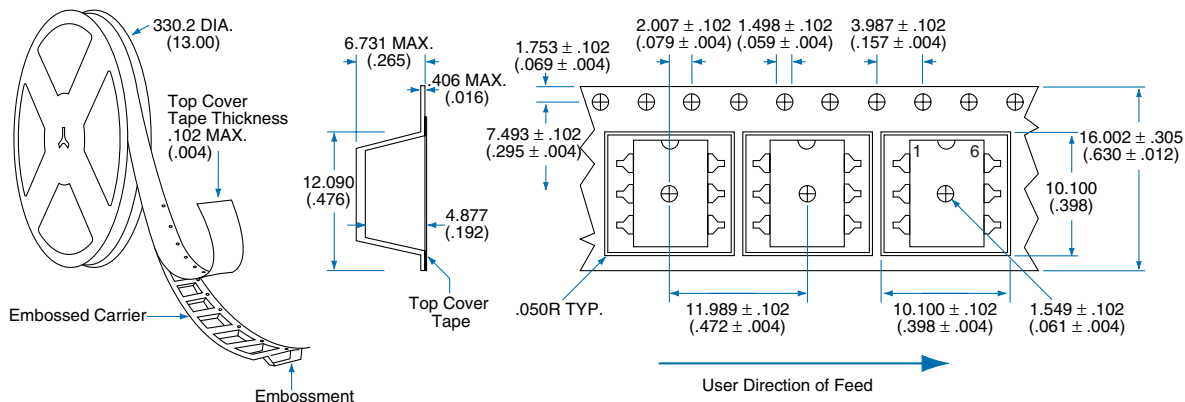

Dimensions  
 mm  
 (inches)



### CLARE LOCATIONS

Clare Headquarters  
 78 Cherry Hill Drive  
 Beverly, MA 01915  
 Tel: 1-978-524-6700  
 Fax: 1-978-524-4900  
 Toll Free: 1-800-27-CLARE

Clare Micronix Division  
 145 Columbia  
 Aliso Viejo, CA 92656-1490  
 Tel: 1-949-831-4622  
 Fax: 1-949-831-4628

### SALES OFFICES

#### AMERICAS

**Americas Headquarters**  
 Clare  
 78 Cherry Hill Drive  
 Beverly, MA 01915  
 Tel: 1-978-524-6700  
 Fax: 1-978-524-4900  
 Toll Free: 1-800-27-CLARE

**Eastern Region**  
 Clare  
 603 Apache Court  
 Mahwah, NJ 07430  
 Tel: 1-201-236-0101  
 Fax: 1-201-236-8685  
 Toll Free: 1-800-27-CLARE

**Central Region**  
 Clare Canada Ltd.  
 3425 Harvester Road, Suite 202  
 Burlington, Ontario L7N 3N1  
 Tel: 1-905-333-9066  
 Fax: 1-905-333-1824

**Western Region**  
 Clare  
 1852 West 11th Street, #348  
 Tracy, CA 95376  
 Tel: 1-209-832-4367  
 Fax: 1-209-832-4732  
 Toll Free: 1-800-27-CLARE

**Canada**  
 Clare Canada Ltd.  
 3425 Harvester Road, Suite 202  
 Burlington, Ontario L7N 3N1  
 Tel: 1-905-333-9066  
 Fax: 1-905-333-1824

### EUROPE

**European Headquarters**  
 CP Clare nv  
 Bampsplaan 17  
 B-3500 Hasselt (Belgium)  
 Tel: 32-11-300868  
 Fax: 32-11-300890

**France**  
 Clare France Sales  
 Lead Rep  
 99 route de Versailles  
 91160 Champlan  
 France  
 Tel: 33 1 69 79 93 50  
 Fax: 33 1 69 79 93 59

**Germany**  
 Clare Germany Sales  
 ActiveComp Electronic GmbH  
 Mitterstrasse 12  
 85077 Manching  
 Germany  
 Tel: 49 8459 3214 10  
 Fax: 49 8459 3214 29

**Italy**  
 C.L.A.R.E.s.a.s.  
 Via C. Colombo 10/A  
 I-20066 Melzo (Milano)  
 Tel: 39-02-95737160  
 Fax: 39-02-95738829

**Sweden**  
 Clare Sales  
 Comptronic AB  
 Box 167  
 S-16329 Spånga  
 Tel: 46-862-10370  
 Fax: 46-862-10371

**United Kingdom**  
 Clare UK Sales  
 Marco Polo House  
 Cook Way  
 Bindon Road  
 Taunton  
 UK-Somerset TA2 6BG  
 Tel: 44-1-823 352541  
 Fax: 44-1-823 352797

### ASIA/PACIFIC

**Asian Headquarters**  
 Clare  
 Room N1016, Chia-Hsin, Bldg II,  
 10F, No. 96, Sec. 2  
 Chung Shan North Road  
 Taipei, Taiwan R.O.C.  
 Tel: 886-2-2523-6368  
 Fax: 886-2-2523-6369

<http://www.clare.com>

---

*Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.*

*The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.*

---