

HUL7202

Hologram Unit


For optical information processing

■ Features

- Smaller package size achieved through micro-mirror integration
(4.8 × 8.2 × 4.3 mm)
- Built-in I-V conversion amp
- Focus error signal detection : SSD method
- Tracking error signal detection
: 3 beam method
- Low-power semiconductor laser included

■ Applications

- Car CD

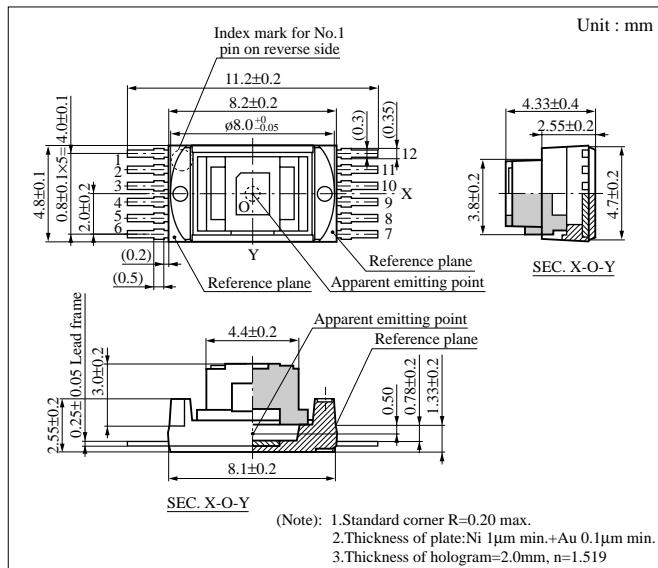

■ Absolute Maximum Ratings (Ta = 25°C)


Parameter	Symbol	Ratings	Unit
Laser beam output ^{*1}	P _O	0.3	mW
Reverse voltage	Laser	V _{R(LD)}	V
	Monitor	V _{R(mon)}	V
Supply voltage	V _R	6	V
Operating ambient temperature	T _{opr}	-10 to +70	°C
Storage temperature	T _{sg}	-40 to +85	°C

^{*1} Equivalent to optical output of 5 mW at laser edge

■ Electro-Optical Characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	min	typ	max	Unit
Laser beam output	P _O	CW		0.18	0.25	mW
Operating current	I _{OP}	CW V _{RF} = 420mV, V _{CC} = 5V	23	35	40	mA
Operating voltage	V _{OP}	CW V _{RF} = 420mV, V _{CC} = 5V		1.9	2.4	V
Oscillating wavelength	λ _L	CW V _{RF} = 420mV, V _{CC} = 5V	785	800	815	nm
Focus error signal amplitude	V _{FE}	CW V _{RF} = 420mV, V _{CC} = 5V	180	300	420	mV
Tracking error signal amplitude	V _{TE}	CW V _{RF} = 420mV, V _{CC} = 5V	170	280	390	mV
Focus error signal pull-in range	D _{FE}	CW V _{RF} = 420mV, V _{CC} = 5V	9	12	16	μm
Frequency characteristics (-3 dB)	f _C		6	9		MHz

■ Block Diagram of Circuit Functions

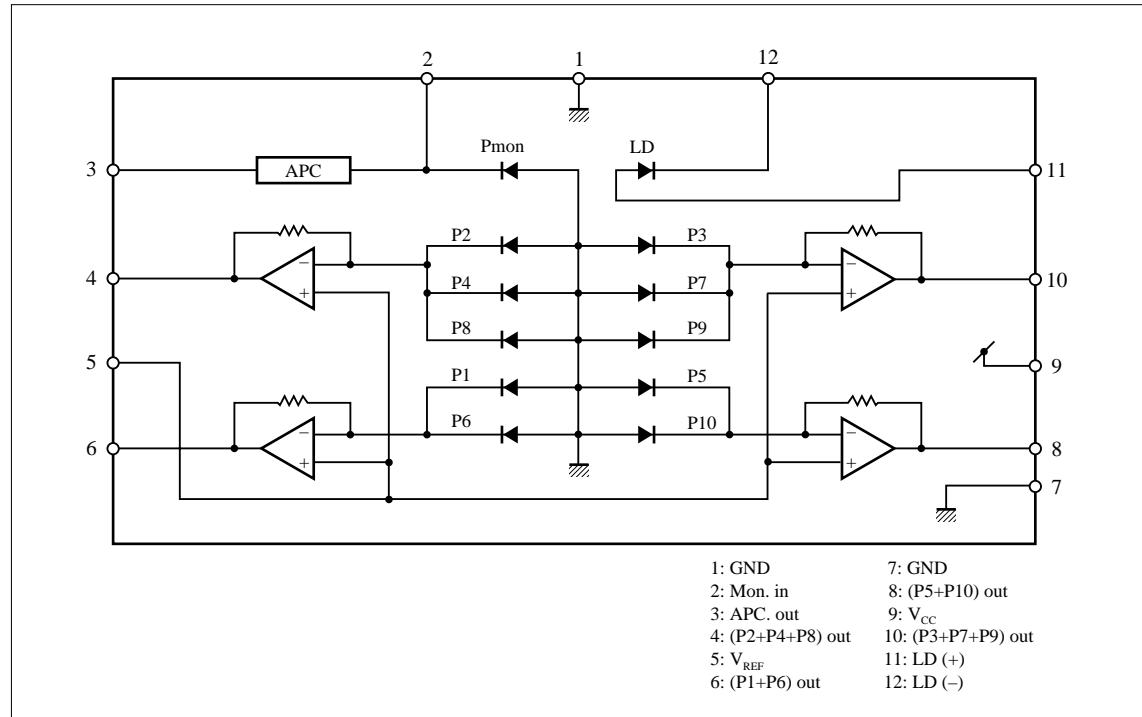 $I - L, I - V$ 