

Description

- Low profile, compact, 2-element AM IF filter with high reliability.
- Center frequency range: 450 to 470kHz
- Bandwidth at 6dB: 4 to 10kHz.


Features

- Compact, low profile (height 7.6mm).
- High selectivity, suited for a wide range of applications
- Low spurious response
- Lead-free terminations

Applications

- AM radio cassettes, stereo sets, telecommunications
- Wireless data communication equipment


Dimensions

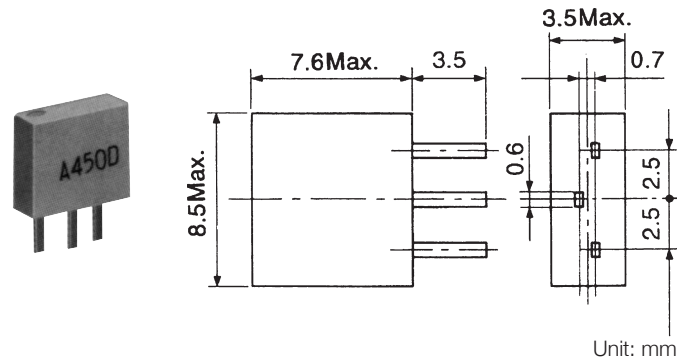

Test Circuit

Test Conditions

1. C includes test circuit capacitance.
2. L_1 2.7mH, L_2 1.0mH
3. During testing, when matching coils are used at input/output sides, connect L_1 and L_2 (dummy)
4. R_1, R_2 : Input-output impedance
Cs: Stray capacitance
(less than 50pF, including EV)



STANDARD FILTERS SELECTION GUIDE

TYPE CFMR (CERASIZER®)

TOKO Part Number	Center Frequency (Fo)* (kHz)	Bandwidth at 6dB (kHz)	Selectivity at Fo±9kHz (dB)	Ripple in Pass Band (dB)	Insertion Loss (dB)	Input/Output Impedance (kΩ)
##ACFMR-455Z	455±1.0	4.0±1.0	24.0 min.	1.0 max.	7.0 max.	1.0/1.5
##ACFMR-455AL	455±1.0	4.0 min.	18.0 min.	1.0 max.	6.0 max.	1.0/1.5
##ACFMR-455BL	455±1.0	6.0 min.	16.0 min.	1.0 max.	6.0 max.	1.0/2.0
##ACFMR-455CL	455±1.0	8.0 min.	12.0 min.	2.0 max.	6.0 max.	2.0/2.0
##ACFMR-455DL	455±1.0	10.0 min.	9.0 min.	2.0 max.	6.0 max.	2.0/2.0

* Center frequencies 450kHz, 455kHz, 459kHz, 460kHz, 468kHz available. Center frequency tolerance available to ±0.5kHz.



The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.