

NON-ISOLATED DC/DC CONVERTERS

2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output



V7BA-06F2Ax Series

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (300 kHz)
- Over Temperature Protection
- Flexible Output Voltage Sequencing
- Under-voltage Lockout (UVLO)
- Wide Trim
- OCP/SCP
- Remote On/Off
- Active Low/High (option)
- Able to Sink & Source Current



Description

The Bel V7BA-06F2Ax modules are a series of non-isolated dc/dc converters that deliver up to 6A of output current with full load efficiency of 93% at 3.3 V output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 V to 3.63 V over a wide range of input voltage (2.4 V-5.5 V). These modules have a sequencing feature that enables designers to implement various types of output voltage sequencing when powering multiple voltages on a board. The open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, over current protection, short current protection, wide input, and programmable output voltage.

Part Selection

| Output Voltage | Input Voltage | Max. Output Current | Max. Output Power | Typical Efficiency | Model Number Active Low | Model Number Active High |
|----------------|---------------|---------------------|-------------------|--------------------|-------------------------|--------------------------|
| 0.75 V -3.63 V | 2.4 V – 5.5 V | 6 A | 21.8 W | 93% | V7BA-06F2AL | V7BA-06F2A0 |

Note: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

| Parameter | Min | Typ | Max | Notes |
|---------------------------------|--------|-----|--------|-------|
| Input Voltage (continuous) | -0.3 V | - | 5.8 V | |
| Output Enable Terminal Voltage | -0.3 V | - | 5.5 V | |
| Sequencing Voltage ¹ | -0.3 V | - | Vin | |
| Ambient Temperature | -40 °C | - | 85 °C | |
| Storage Temperature | -55 °C | - | 125 °C | |

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. V7BA-06F2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When not used sequencing feature, tie the SEQ pin to Vin.

NON-ISOLATED DC/DC CONVERTERS

2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output



Input Specifications

| Parameter | | Min | Typ | Max | Notes |
|---|-------------|--------|-----------------------|--------|---|
| Input Voltage | Vo≤1.5 V | 2.4 V | - | 5.5 V | |
| | 1.8 V | 3 V | - | 5.5 V | |
| | 2.5 V-3.3 V | 4.5 V | - | 5.5 V | |
| Input Current (full load) | Vo=3.3V | - | - | 4.73 A | |
| | Vo=2.5V | - | - | 3.66 A | |
| | Vo=1.8V | - | - | 4.09 A | |
| | Vo=1.5V | - | - | 4.31 A | |
| | Vo=1.2V | - | - | 3.57 A | |
| | Vo=0.75V | - | - | 2.40 A | |
| Input Current (no load) | Vo=3.3 V | - | 50 mA | - | |
| | Vo=0.75 V | - | 25 mA | - | |
| Remote Off Input Current | - | 0.6 mA | - | - | |
| Input Reflected Ripple Current (pk-pk) | - | 120 mA | - | - | Tested with simulated source impedance of 1 uH, 5 Hz to 20 MHz, one 1000 uF/25 V AL capacitor and two 100 uF/ 10 V Tantalum capacitor at the input. |
| Input Reflected Ripple Current (rms) | - | 35 mA | - | - | |
| I ² t Inrush Current Transient | - | - | 0.04 A ² s | - | |
| Turn-on Voltage Threshold | - | 2.05 V | 2.4 V | - | |
| Turn-off Voltage Threshold | 1.8 V | 2.0 V | - | - | |

Output Specifications

| Parameter | | Min | Typ | Max | Notes |
|---|----------------------|-----------------------|--------|--|--|
| Output Voltage Set Point | -2% Vo,set | - | - | 2% Vo,set | Vin=5 V, 50% full load |
| Output Voltage Set Point | -3% Vo,set | - | - | 3% Vo,set | Over all operating input voltages, resistive loads and temperature conditions |
| Adjustment Range Selected by External Resistor or Voltage | 0.7525 V | - | - | 3.63 V | |
| Load Regulation | - | 0.4% Vo,set | - | - | Io=Io, min to 50%Io, max |
| Line Regulation | - | 0.3% Vo,set | - | - | Vin=50% Vin, min to Vin, max |
| Regulation Over Temperature (-40 °C to +85 °C) | - | 0.4% Vo,set | - | - | Tref=Ta, min to Ta, max |
| Output Current | 0 A | - | - | 6 A | |
| Current Limit Threshold | 9 A | - | - | 18 A | |
| Short Circuit Surge Transient | - | 0.32 A ² s | - | - | |
| Ripple and Noise (pk-pk) | - | 40 mV | 70 mV | Tested with 0-20 MHz, with 10 uF Tantalum capacitor & 1 uF/10 V ceramic capacitor at the output. | |
| Ripple and Noise (rms) | - | 10 mV | 30 mV | | |
| Turn on Time | - | 6 mS | 10 mS | | |
| Overshoot at Turn on | - | - | 3% | | |
| Output Capacitance ESR ≥ 1mohm ESR ≥ 10mohm | 0 uF | - | - | 1000 uF | di/dt=2.5 A/uS; Vin=5 V; and with 10 uF Tantalum capacitor & 1 uF/10 V TDK ceramic capacitor at the output |
| | 0 uF | - | - | 3000 uF | |
| Transient Response | | | | | |
| 50% ~ 100% Max Load | Vo = 0.75 V - 3.63 V | - | 130 mV | - | |
| Settling Time | | - | 25 uS | - | |
| 100% ~ 50% Max Load | | - | 130 mV | - | |
| Settling Time | | - | 25 uS | - | |

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output



General Specifications

| Parameter | Min | Typ | Max | Notes |
|---------------------------|---|---------|---------|---|
| Efficiency | Vo=3.3 V | - | 93% | Measured at Vin=5 V, full load |
| | Vo=2.5 V | - | 91% | |
| | Vo=1.8 V | - | 88% | |
| | Vo=1.5 V | - | 87% | |
| | Vo=1.2 V | - | 84% | |
| | Vo=0.7525 V | - | 78% | |
| Switching Frequency | 250 kHz | 300 kHz | 350 kHz | |
| Over Temperature Shutdown | - | 135 °C | - | |
| Output Voltage Trim Range | 0.7525 V | - | 3.63 V | |
| MTBF | 7,142,646 hours | | | Calculated Per Bell Core TR-332 (Vin=5 V; Vo=0.75 V; Io = 4.8 A; Ta = 25°C) |
| Dimensions | Inches (L × W × H) Millimeters (L × W × H) | | | |
| | 1.0 x 0.5 x 0.243 25.4 x 12.7 x 6.16 | | | |
| Weight | - | 5 g | - | |

Note: All specifications are typical at 25 °C unless otherwise stated.


Control Specifications

| Parameter | Min | Typ | Max | Notes |
|---------------------------------|--------|--------|----------|---|
| Remote On/Off | | | | |
| Signal Low (Unit Off) | -0.2 V | - | 0.3 V | V7BA-06F2A0; Remote On/Off pin open, Unit off. |
| Signal High (Unit On) | - | - | Vin, max | |
| Signal Low (Unit On) | -0.2 V | - | 0.3 V | V7BA-06F2AL; Remote On/Off pin open, Unit on. |
| Signal High (Unit Off) | 1.5 V | - | Vin, max | |
| Sequencing Voltage | 0 V | - | Vin | Sequencing Voltage applied on SEQ pin should be higher than output voltage. |
| Sequencing Slew Rate Capability | - | - | 2 V/mS | |
| Sequencing Delay Time | 10 mS | - | - | Delay from Vin, min to application of voltage on SEQ pin |
| Tracking Accuracy | | | | |
| Power-Up | - | 100 mV | 200 mV | |
| Power-Down | - | 200 mV | 400 mV | |

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{21.07}{V_{adj} - 0.7525} - 5.11$$

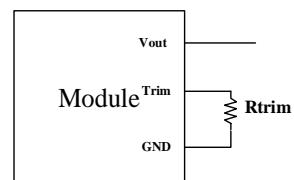

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (Vadj) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.







$$V_{trim} = 0.7 - 0.1698 \times (V_{adj} - 0.7525)$$

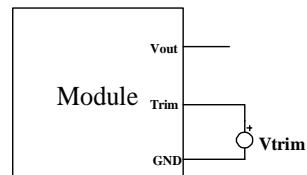

NON-ISOLATED DC/DC CONVERTERS
2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output




Efficiency Data

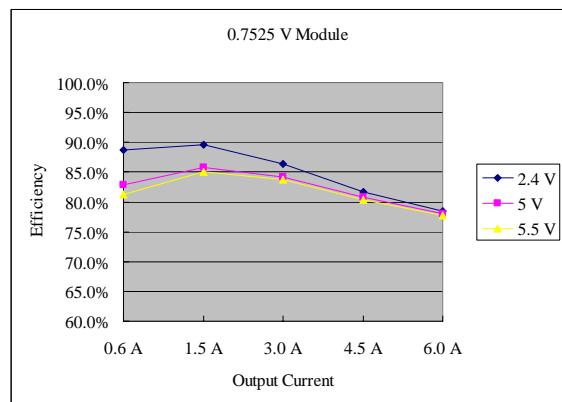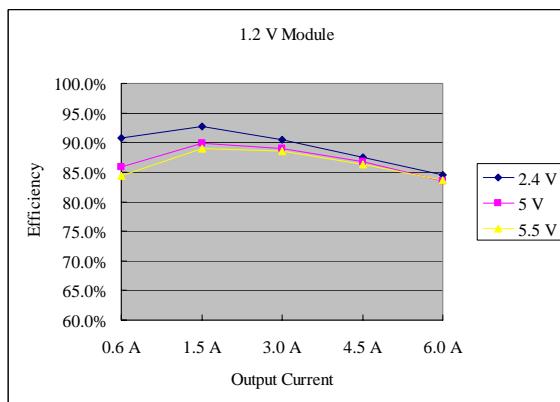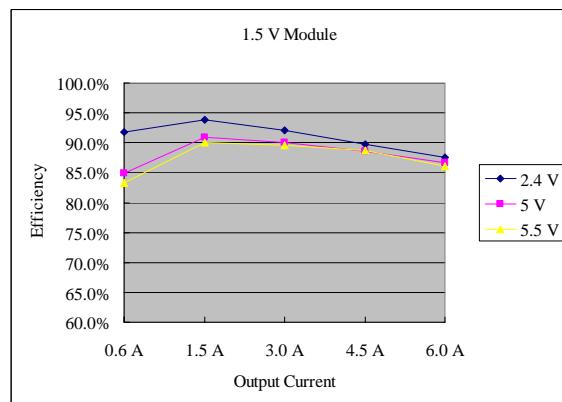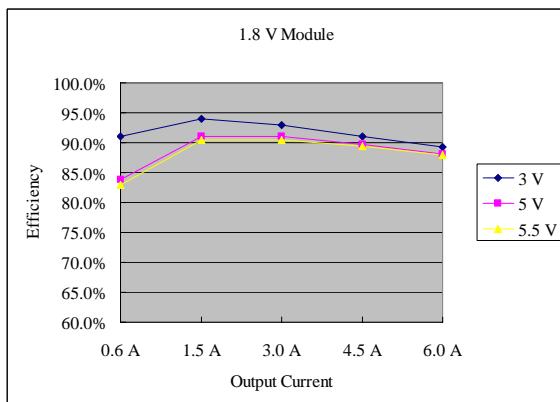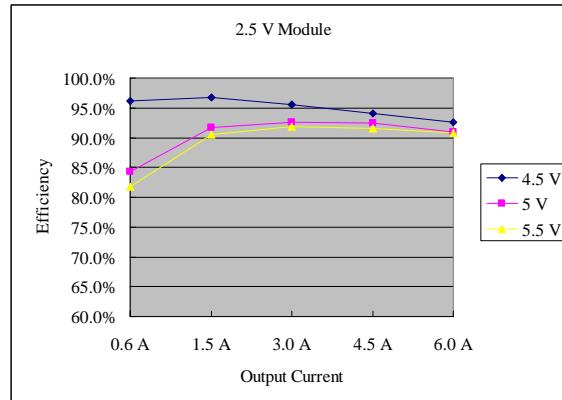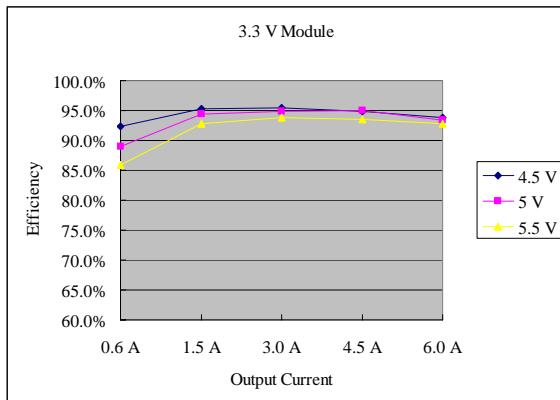


NON-ISOLATED DC/DC CONVERTERS


2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output

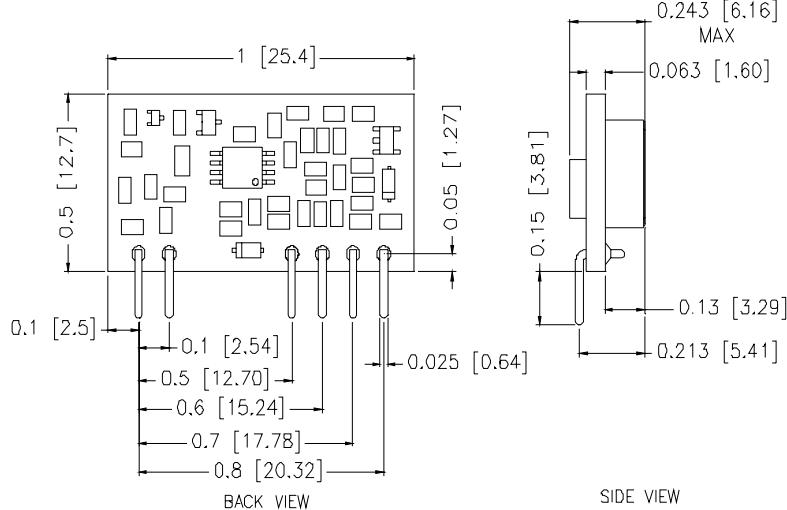

SIDE VIEW

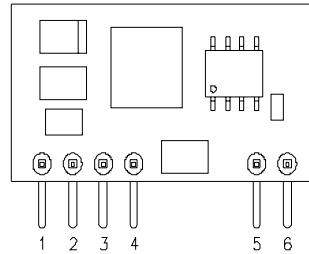


TOP VIEW

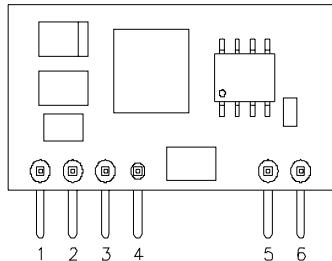

Pin Connections

| Pin | Function |
|-----|---------------|
| 1 | Vout |
| 2 | Trim |
| 3 | Ground |
| 4 | SEQ |
| 5 | Vin |
| 6 | Remote On/Off |

Recommended Pad Layout for SIP Module

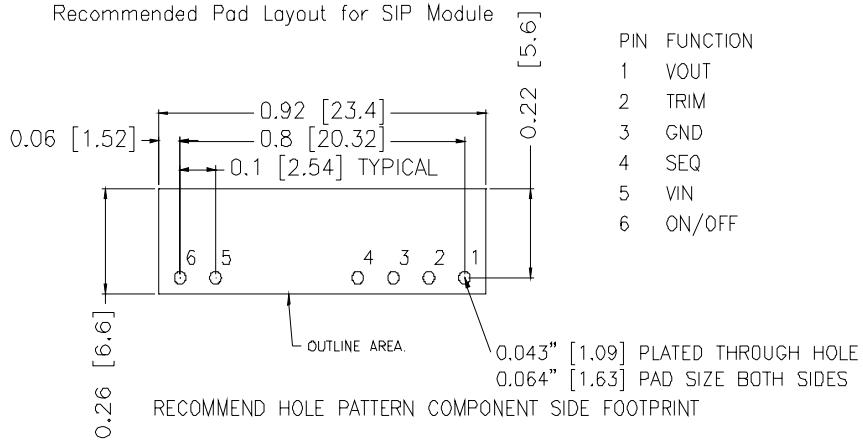

| PIN | FUNCTION |
|-----|----------|
| 1 | VOUT |
| 2 | TRIM |
| 3 | GND |
| 4 | SEQ |
| 5 | VIN |
| 6 | ON/OFF |

©2005 Bel Fuse Inc. Specifications subject to change without notice. 040805

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com