

TA76432AFT, TA76432AF, TA76432AFR, TA76432AS

1.26-V Adjustable High-Precision Shunt Regulators


The TA76432 series consists of adjustable high-precision shunt regulators whose output voltage (V_{KA}) can be set arbitrarily using two external resistors.

These devices have a precise internal reference voltage of 1.26 V, enabling them to operate at low voltage.

The devices are ideal for use as error amplifiers in 3-V switching-regulator systems. In addition, they can be used as zener diodes to perform temperature compensation.

Features

- Precision reference voltage: $V_{REF} = 1.26 \text{ V} \pm 1\%$ ($T_a = 25^\circ\text{C}$)
- Small temperature coefficient: $|\alpha V_{REF}| = 30 \text{ ppm}/^\circ\text{C}$ (typ.)
- Adjustable output voltage: $V_{REF} \leq V_{OUT} \leq 19 \text{ V}$
- Minimum cathode current for regulation:
 $I_{kmin} = 0.5 \text{ mA}$ (max.)
- Operating temperature: $T_a = -40 \sim 85^\circ\text{C}$
- Packages: UFV (TA76432AFT),
PW-MINI (TA76432AF/AFR) and
TO-92MOD (TA76432AS)
- The TA76432AFT is housed in an ultra-thin UFV package.
(thickness: 0.7 mm typ.)

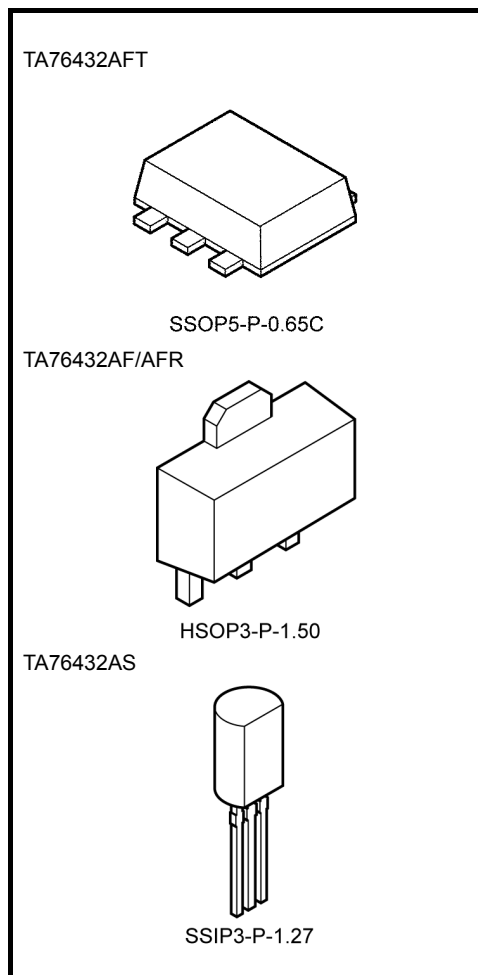


Weight


- SSOP5-P-0.65C : 0.007 g (typ.)
- HSOP3-P-1.50 : 0.05 g (typ.)
- SSIP3-P-1.27 : 0.36 g (typ.)

Pin Assignment/Marking


TA76432AFT

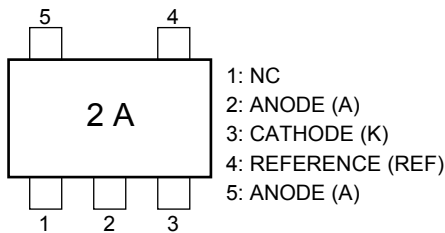

TA76432AF/AFR

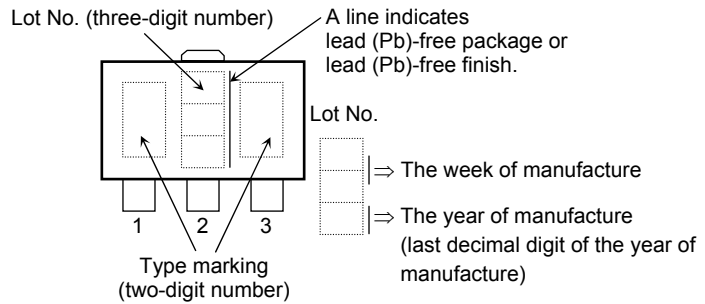

TA76432AS

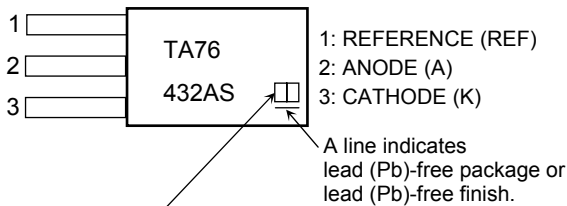

| No. | TA76432AF | TA76432AFR |
|-----|-----------------|-----------------|
| 1 | CATHODE (K) | REFERENCE (REF) |
| 2 | ANODE (A) | ANODE (A) |
| 3 | REFERENCE (REF) | CATHODE (K) |

Lot No: The last decimal digit of the year of manufacture followed by the month as letters A to L of the alphabet.
For example: Jan-2004 is coded as "4A"


Note: TA76432AFvs.TA76432AFR:
reverse pin connection.

How to Order


| Product No. | Package Type | Packing Type and Capacity | Minimum Order |
|-----------------------|--|---------------------------------------|---------------|
| TA76432AFT (TE85L) | UFV (surface-mount type) | Embossed tape: 3000/tape | 1 tape |
| TA76432AF/AFR | PW-MINI (SOT-89) (surface-mount type) | On cut tape (TE12L): 100/tape section | 100 |
| TA76432AF/AFR (TE12L) | | Embossed tape: 1000/tape | 1 tape |
| TA76432AS | TO-92MOD (lead type) | Loose in bag: 200/bag | 1 bag |
| TA76432AS (TPE6) | | Radial tape: 2000/tape | 1 tape |

Note: The lead pitch for the TA76432AS and TA76432AS (TPE6) may vary.

Functional Block Diagram

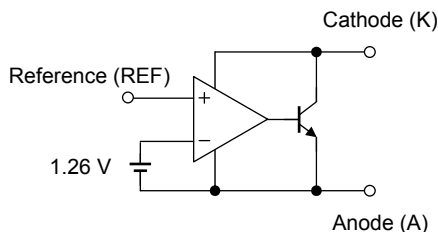


Circuit Symbol

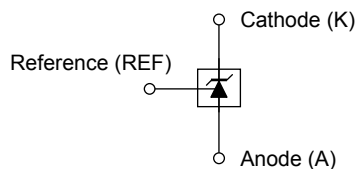


Typical Application Circuits

1.26 V Reference ($V_{KA} = V_{REF}$)



Shunt regulator ($V_{KA} > V_{REF}$)

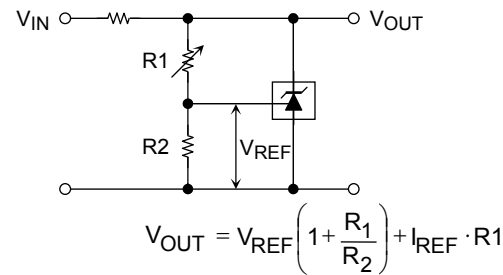

Precautions during Use

- (1) TA76432AFT, TA76432AF/AFR, TA76432AS
These products contain MOS elements. Please take care to avoid generating static electricity when handling these devices.
- (2) TA76432AFT, TA76432AF/AFR, TA76432AS
The oscillation frequency of these devices is determined by the value of the capacitor connected between the anode and the cathode.
When establishing maximum operating condition parameters, please derate the maximum rating values specified in these datasheets so as to allow an operational safety margin.
Use of a laminated ceramic capacitor is recommended.
- (3) Precautions when handling anode pin of TA76432AFT
Pin 2 and pin 5 should normally be shorted together. If only pin 5 is used, pin 2 should either be left open or always kept at a lower potential than pin 5. Do not leave pin 5 open and use pin 2 only.

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

| Characteristics | Symbol | Rating | Unit |
|---------------------------------|---------------|---------------|---------------------------|
| Cathode voltage | V_{KA} | 20 | V |
| Cathode current | I_K | 20 | mA |
| Cathode-anode reverse current | $-I_K$ | 10 | mA |
| Reference voltage | V_{REF} | 7 | V |
| Reference current | I_{REF} | 50 | μA |
| Reference-anode reverse current | $-I_{REF}$ | 10 | mA |
| Power dissipation | TA76432AFT | 0.45 (Note 1) | W |
| | TA76432AF/AFR | 0.5 | |
| | TA76432AS | 0.8 | |
| Thermal resistance | TA76432AFT | 277 (Note 1) | $^\circ\text{C}/\text{W}$ |
| | TA76432AF/AFR | 250 | |
| | TA76432AS | 156 | |
| Operating temperature | T_{opr} | -40~85 | $^\circ\text{C}$ |
| Junction temperature | T_j | 150 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -55~150 | $^\circ\text{C}$ |

Note 1: Glass epoxy board mounting: 30 mm × 30 mm × 0.8 mm (Cu pad area 35 mm²)

Note 2: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Recommended Operating Conditions

| Characteristics | Symbol | Min | Typ. | Max | Unit |
|-----------------------|-----------|-----------|------|-----|------|
| Cathode voltage | V_{KA} | V_{REF} | — | 19 | V |
| Cathode current | I_K | 0.5 | — | 15 | mA |
| Operating temperature | T_{opr} | -40 | — | 85 | °C |


Electrical Characteristics

(Unless otherwise specified, $T_a = 25^\circ\text{C}$, $I_K = 5\text{ mA}$)

| Characteristics | Symbol | Test Condition | Min | Typ. | Max | Unit |
|---|---------------------------|--|-------|------|-------|---------------|
| Reference voltage | V_{REF} | $V_{KA} = V_{REF}$ | 1.247 | 1.26 | 1.273 | V |
| Deviation of reference input voltage over temperature | $V_{REF (dev)}$ | $0^\circ\text{C} \leq T_a \leq 85^\circ\text{C}$, $V_{KA} = V_{REF}$ | — | 3 | 15 | mV |
| Ratio of change in reference input voltage to the change in cathode voltage | $\Delta V_{REF}/\Delta V$ | $V_{REF} \leq V_{KA} \leq 5\text{ V}$ | — | 0.5 | 2.5 | mV/V |
| | | $5\text{ V} \leq V_{KA} \leq 19\text{ V}$ | — | 0.3 | 2.0 | |
| Reference input current | I_{REF} | $V_{KA} = V_{REF}$ | — | 2 | 4 | μA |
| Deviation of reference input current over temperature | $I_{REF (dev)}$ | $0^\circ\text{C} \leq T_a \leq 85^\circ\text{C}$, $V_{KA} = V_{REF}$, $R_1 = 10\text{ k}\Omega$, $R_2 = \infty$ | — | 0.3 | 1.2 | μA |
| Minimum cathode current for regulation | I_{Kmin} | $V_{KA} = V_{REF}$ | — | 0.2 | 0.5 | mA |
| Off-state cathode current | I_{Koff} | $V_{KA} = 19\text{ V}$, $V_{REF} = 0\text{ V}$ | — | — | 1.0 | μA |
| Dynamic impedance | $ Z_{KA} $ | $V_{KA} = V_{REF}$, $f \leq 1\text{ kHz}$, $0.5\text{ mA} \leq I_K \leq 15\text{ mA}$ | — | 0.2 | 0.5 | Ω |

The deviation parameters $V_{REF (dev)}$ and $I_{REF (dev)}$ are defined as the maximum variation of the V_{REF} and I_{REF} over the rated temperature range.


The average temperature coefficient of the V_{REF} is defined as:

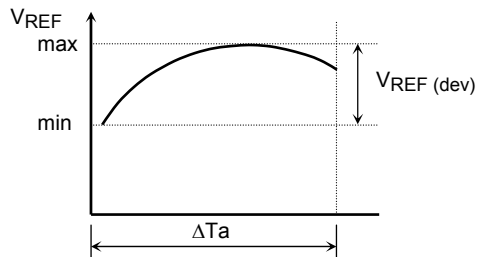







$$|\alpha V_{REF}| = \frac{\left(\frac{V_{REF (dev)} \times 10^6}{V_{REF @ 25^\circ\text{C}}} \right)}{\Delta T_a} \text{ (ppm/}^\circ\text{C)}$$






Application Circuit Example


Error amplification circuit for switching power supply

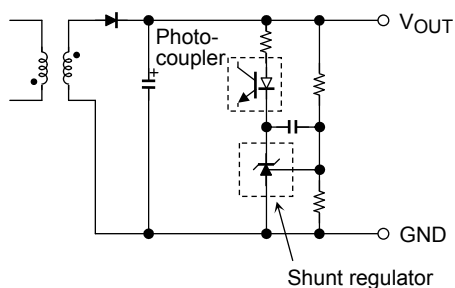

This circuit amplifies the difference between the switching power supply's secondary output voltage and the shunt regulator's reference voltage. It then feeds the amplified voltage back to the primary input voltage via the photocoupler.

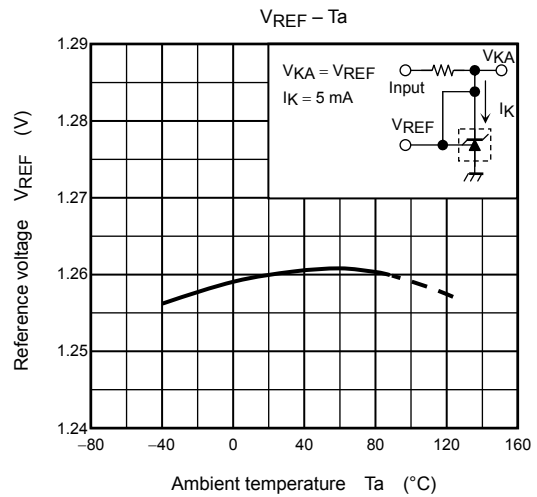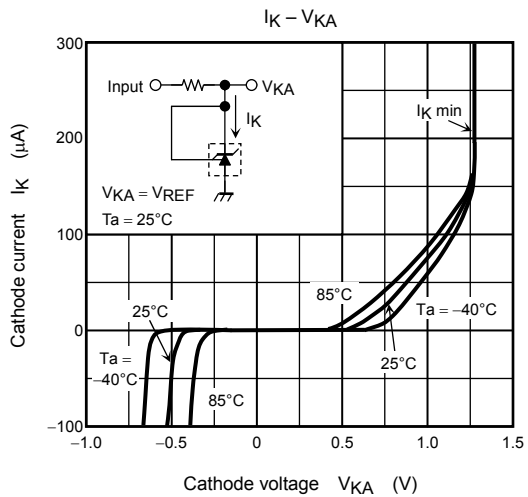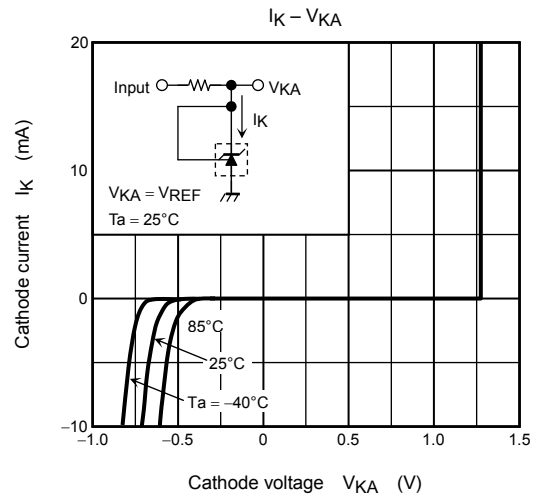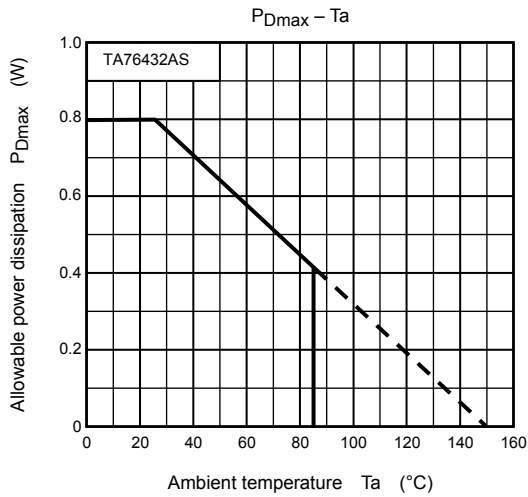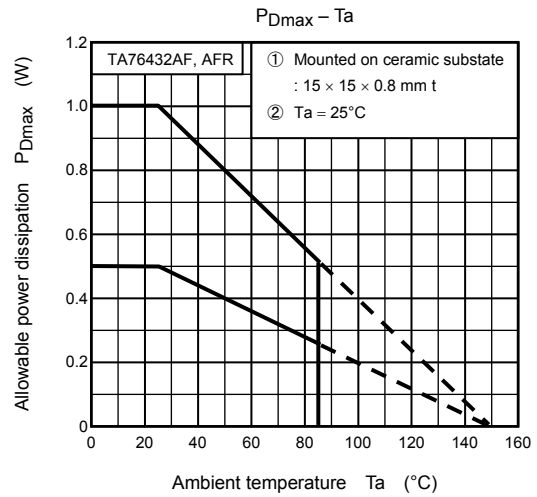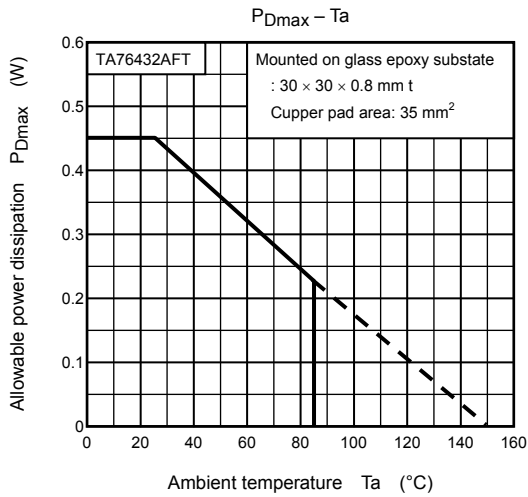

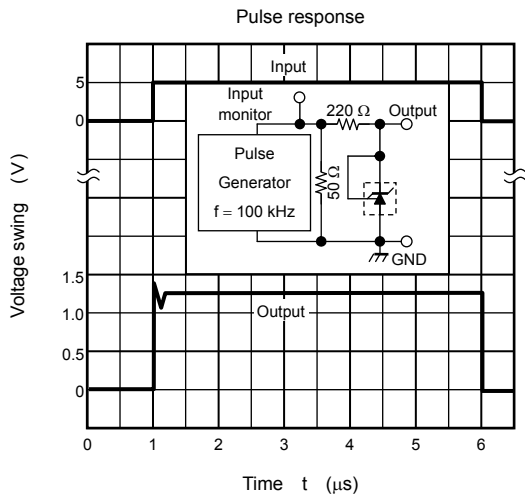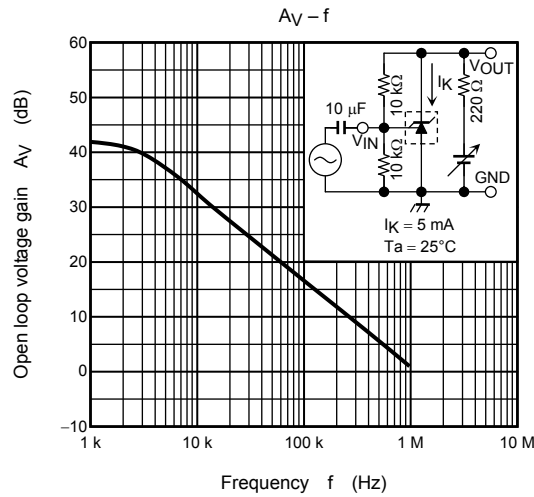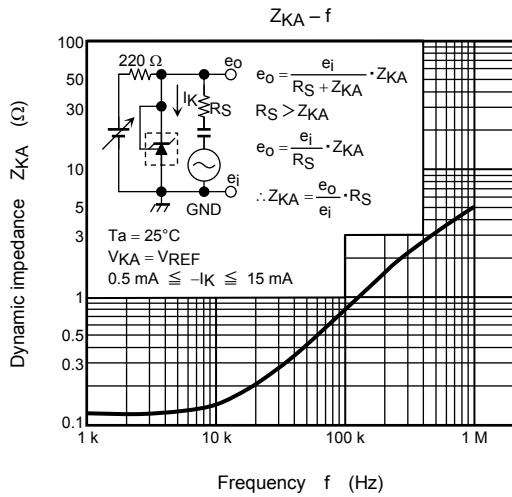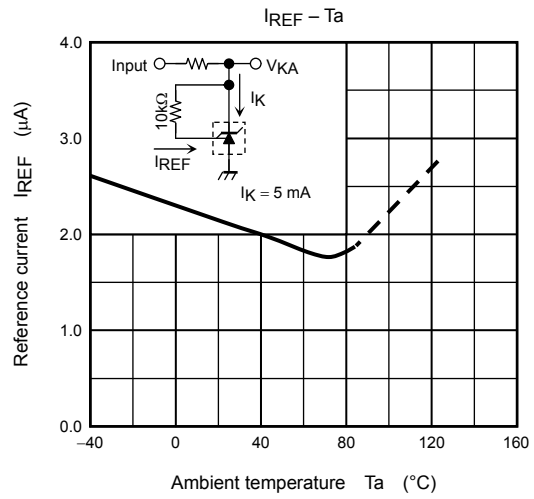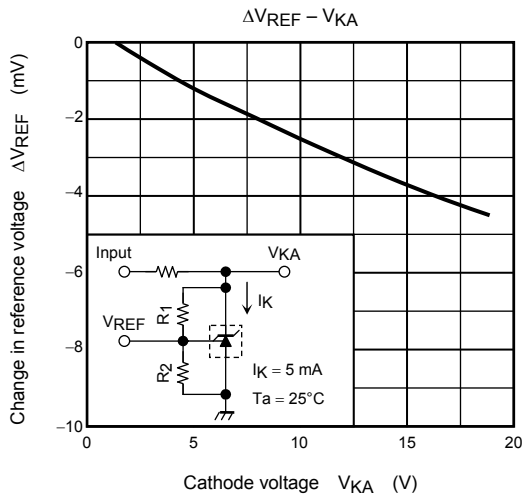


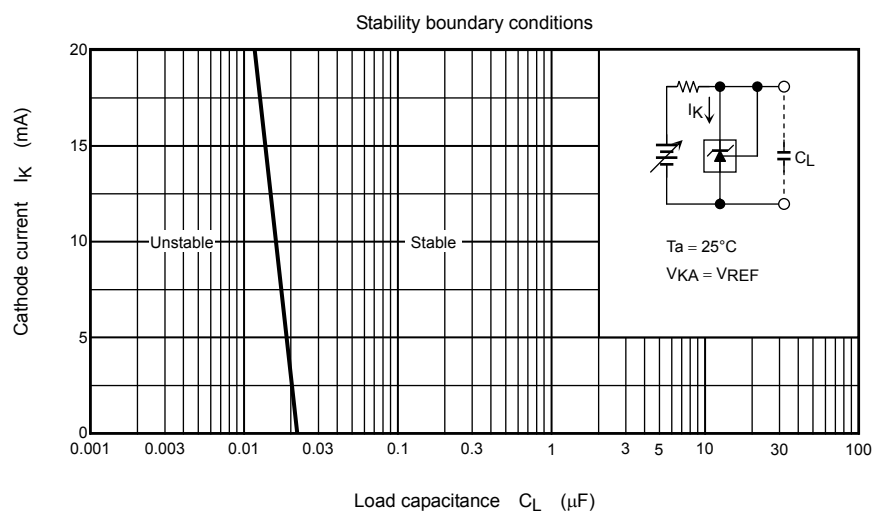

Package Dimensions

SSOP5-P-0.65C

Unit: mm

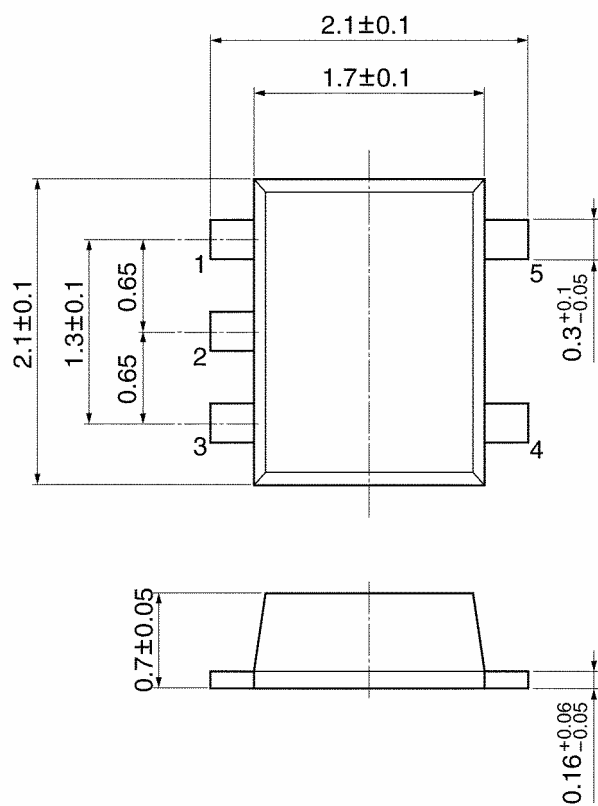


TA76432AFT (UFV)

Weight: 0.007 g (typ.)

Package Dimensions

HSOP3-P-1.50

Unit : mm

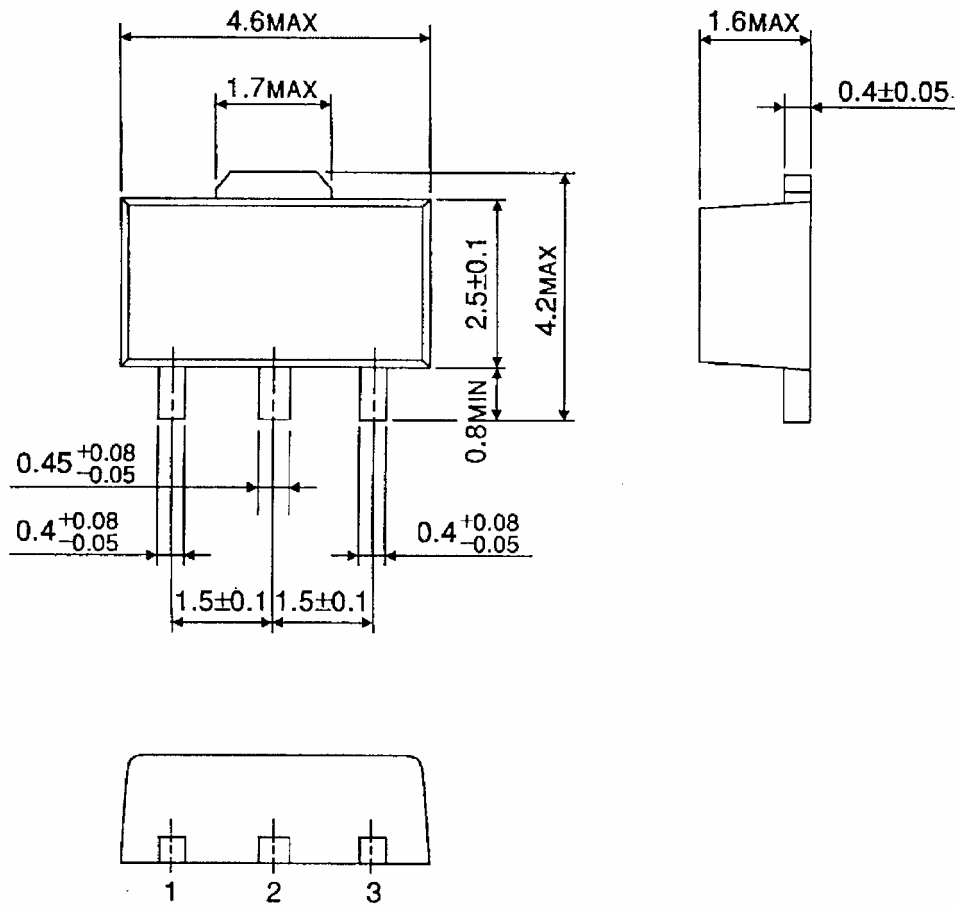

TA76432AF/AFR (PW-MINI)

Weight: 0.05 g (typ.)

RESTRICTIONS ON PRODUCT USE

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.