

UHF OSCILLATOR AND UHF MIXER  
NPN SILICON EPITAXIAL TRANSISTOR  
MINI MOLD

DESCRIPTION

The 2SC3841 is an NPN silicon epitaxial transistor intended for use as UHF oscillators and a UHF mixer in a tuner of a TV receiver.

The device features stable oscillation and small frequency drift against any change of the supply voltage and the ambient temperature.

It is designed for use in small type equipments especially recommendd for Hybrided Integrated Circuit and other applications.

FEATURES

- High Gain Bandwidth Procut;  $f_T = 4.0$  GHz TYP.
- Low Collector to Base Time Constant;  $C_C \cdot \tau_{b'b} = 4.0$  ps TYP.
- Low Output Capacitance;  $C_{ob} = 1.5$  pF MAX.

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25$  °C)

Maximum Voltages and Current


Collector to Base Voltage	$V_{CBO}$	25	V
Collector to Emitter Voltage	$V_{CEO}$	12	V
Emitter to Base Voltage	$V_{EBO}$	3	V
Collector Current	$I_C$	30	mA

Maximum Power Dissipation

Total Power Dissipation	$P_T$	200	mW
-------------------------	-------	-----	----

Maximum Power Temperatures

Junction Temperature	$T_j$	150	°C
Storage Temperature	$T_{stg}$	-55 to +150	°C

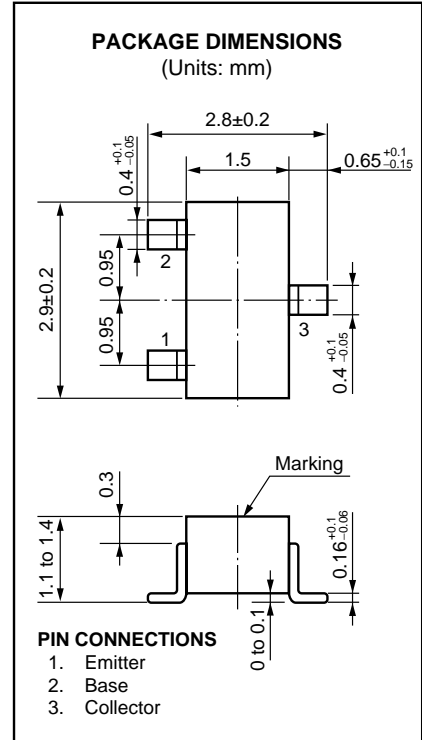

ELECTRICAL CHARACTERISTICS ( $T_A = 25$  °C)







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	$I_{CBO}$			0.1	$\mu A$	$V_{CB} = 10$ V, $I_E = 0$
DC Current Gain	$h_{FE}$	40	100	200		$V_{CE} = 10$ V, $I_C = 5.0$ mA
Collector Saturation Voltage	$V_{CE(sat)}$		0.09	0.5	V	$I_C = 10$ mA, $I_B = 1.0$ mA
Gain Bandwidth Product	$f_T$	2.5	4.0		GHz	$V_{CE} = 10$ V, $I_E = -5.0$ mA
Output Capacitance	$C_{ob}$		0.85	1.5	pF	$V_{CB} = 10$ V, $I_E = 0$ , $f = 1.0$ MHz
Collector to Base Time Constatnt	$C_C \cdot \tau_{b'b}$		4.0	10.0	ps	$V_{CE} = 10$ V, $I_E = -5.0$ mA, $f = 31.9$ MHz

$h_{FE}$  Classification

Class	T62/P *	T63/Q *	T64/R *
Marking	T62	T63	T64
$h_{FE}$	40 to 80	60 to 120	100 to 200

\* Old Specification / New Specification

TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)

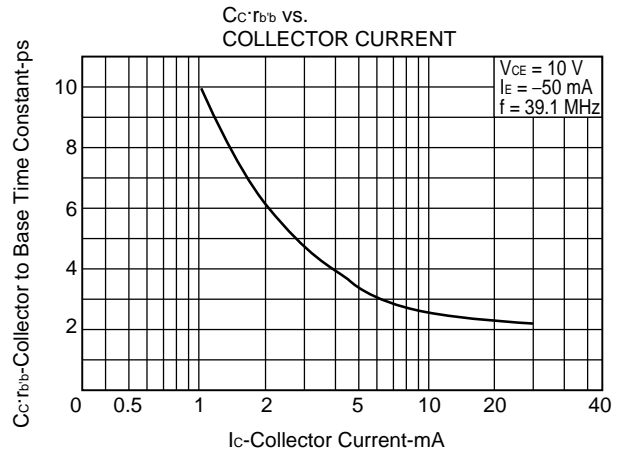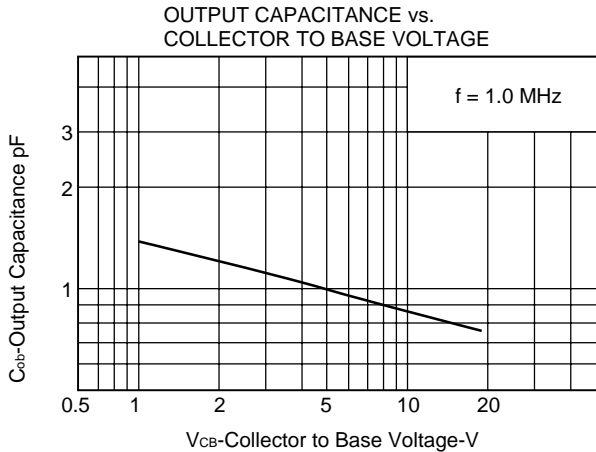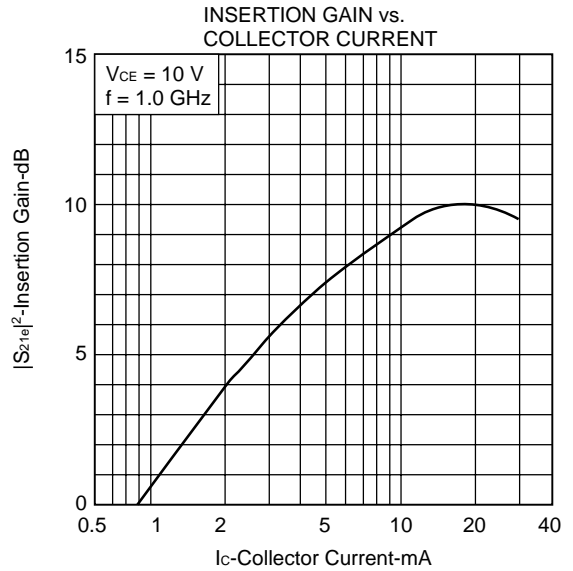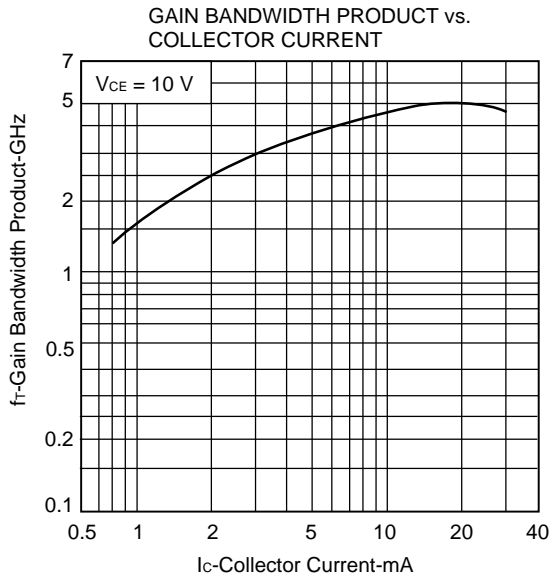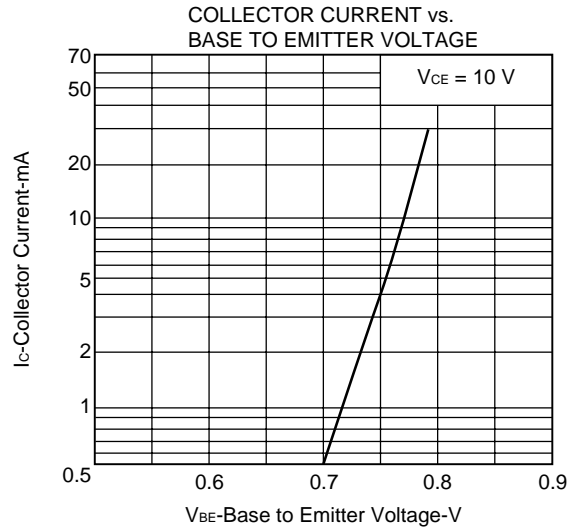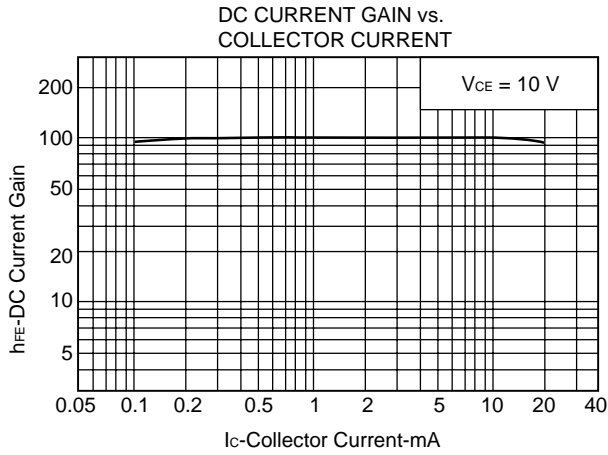


**S-PARAMETER** $V_{CE} = 10 \text{ V}$ ,  $I_c = 5 \text{ mA}$ ,  $Z_o = 50 \Omega$ 


f (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
50	1.047	3	14.240	-178	0.003	42	1.012	3
100	0.944	-18	13.693	164	0.026	81	0.989	-10
200	0.750	-56	10.802	137	0.058	66	0.759	-30
300	0.562	-84	8.270	118	0.078	59	0.582	-39
400	0.468	-106	6.449	105	0.091	58	0.484	-40
500	0.394	-123	5.399	97	0.106	58	0.417	-45
600	0.372	-138	4.421	89	0.120	59	0.343	-44
700	0.359	-150	3.824	83	0.133	59	0.309	-48
800	0.343	-164	3.388	77	0.146	58	0.288	-53
900	0.339	-172	3.020	73	0.158	59	0.292	-54
1000	0.320	178	2.692	67	0.172	59	0.279	-61
1100	0.339	170	2.483	64	0.188	59	0.279	-57
1200	0.351	168	2.291	61	0.204	59	0.279	-61

S-PARAMETER


S<sub>11e</sub>, S<sub>22e</sub>-FREQUENCY CONDITION V<sub>CE</sub> = 10 V, I<sub>c</sub> = 5 mA, Z<sub>o</sub> = 50 Ω

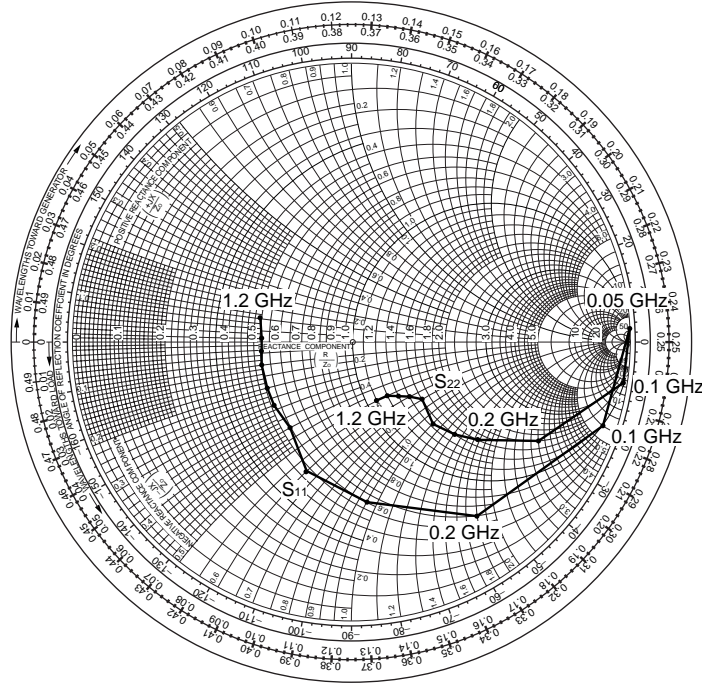

S<sub>21e</sub>-FREQUENCY CONDITION V<sub>CE</sub> = 10 V, I<sub>c</sub> = 5 mA

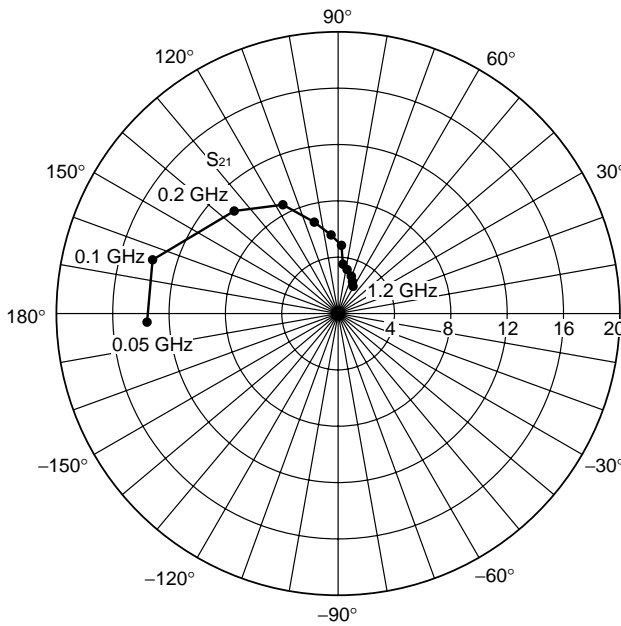

S<sub>12e</sub>-FREQUENCY CONDITION V<sub>CE</sub> = 10 V, I<sub>c</sub> = 5 mA

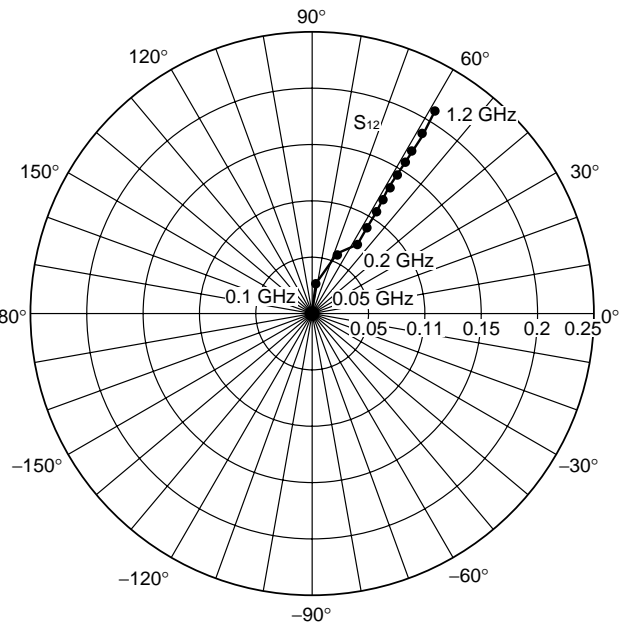

[MEMO]

[MEMO]

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.