

VCO for CB, C/P PLL APPLICATION.




### FEATURES

- Low Series Resistance :  $r_s=0.3(\text{Typ.})$ .
- Small Package.

### MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	$V_R$	15	V
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55~150	$^\circ\text{C}$

### Marking

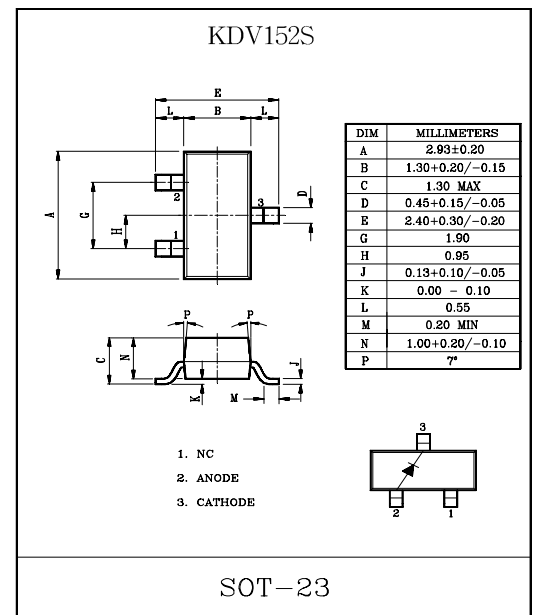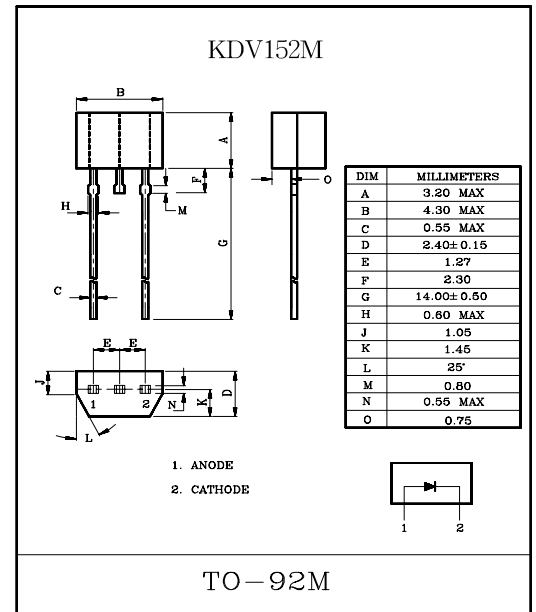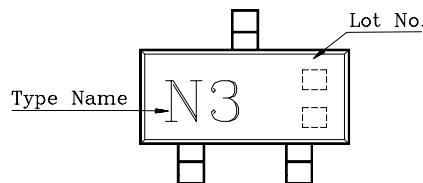

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Voltage	$V_R$	$I_R=10\mu\text{A}$	15	-	-	V
Reverse Current	$I_R$	$V_R=15\text{V}$	-	-	50	nA
Capacitance	$C_{2V}$	$V_R=2\text{V}, f=1\text{MHz}$	42	-	47.5	pF
	$C_{8V}$	$V_R=8\text{V}, f=1\text{MHz}$	24	-	28.8	
Capacitance Ratio	$C_{2V}/C_{8V}$		1.60	-	1.8	
Series Resistance	$r_s$	$C=38\text{pF}, f=100\text{MHz}$	-	0.3	0.4	$\Omega$

# KDV152M/S

