

FMTR SERIES 30 WATT

DC/DC CONVERTERS

ABSOLUTE MAXIMUM RATINGS	
Input Voltage	<ul style="list-style-type: none"> 17 to 40 VDC
Output Power	<ul style="list-style-type: none"> 25 to 30 watts depending on model Input filter current, 2.7 A max.
Lead Soldering Temperature (10 sec per pin)	<ul style="list-style-type: none"> 300°C
Storage Temperature Range (Case)	<ul style="list-style-type: none"> -65°C to +135°C

RECOMMENDED OPERATING CONDITIONS	
Input Voltage Range	<ul style="list-style-type: none"> 17 to 40 VDC continuous 50V for 50 ms transient protection
Case Operating Temperature (Tc)	<ul style="list-style-type: none"> -55°C to +125°C full power -55°C to +135°C absolute
Derating Output Power/Current	<ul style="list-style-type: none"> Linearly from 100% at 125°C to 0% at 135°C

SYNC AND INHIBIT	
Sync (500 to 675 kHz)	<ul style="list-style-type: none"> Duty cycle 40% min, 60% max Logic low 0.8 V max Logic high 4.5 V min, 5 V max Referenced to inh/sync return If not used, connect to inh/sync return
Inhibit TTL Open Collector	<ul style="list-style-type: none"> Logic low (output disabled) Voltage ≤ 0.8 V Inhibit pin current 8.0 mA max Referenced to inh/sync return Logic high (output enabled) Open collector

EMI FILTER	
Noise Rejection - Minimum	
500 kHz	55 dB
1 MHz	60 dB
5 MHz	60 dB

TYPICAL CHARACTERISTICS	
Output Voltage Temperature Coefficient	<ul style="list-style-type: none"> 100 ppm/°C typical
Input to Output Capacitance	<ul style="list-style-type: none"> 50 pF typ
Current Limit	<ul style="list-style-type: none"> 115% of full load typical
Isolation	<ul style="list-style-type: none"> 100 megohm minimum at 500 V
Audio Rejection	<ul style="list-style-type: none"> 40 dB typical
Conversion Frequency	<ul style="list-style-type: none"> Free run 550 min, 600 typ, 650 max kHz External sync 500 to 675 kHz
Inhibit Pin Voltage (unit enabled)	<ul style="list-style-type: none"> 9 to 11 V
Input Filter DC Resistance	<ul style="list-style-type: none"> 0.2 ohms max

Electrical Characteristics: -55°C to +125°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

SINGLE OUTPUT MODELS		FMTR283R3S			FMTR2805S			FMTR2812S			FMTR2815S			UNITS		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX			
OUTPUT VOLTAGE	25°C	3.26	3.30	3.34	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	VDC		
	-55°C TO +125°C	3.20	3.30	3.40	4.85	5.00	5.15	11.64	12.00	12.36	14.55	15.00	15.45			
OUTPUT CURRENT ¹	V _{IN} = 17 to 40 VDC	0	—	6.06	0	—	5.0	0	—	2.5	0	—	2.0	A		
OUTPUT POWER ¹	V _{IN} = 17 to 40 VDC	0	—	20	0	—	25	0	—	30	0	—	30	W		
OUTPUT RIPPLE VOLTAGE	10 kHz – 2 MHz	25°C		—	70	140	—	110	220	—	60	120	—	25	50	mV p-p
		—	—	180	—	—	260	—	—	160	—	—	90			
LINE REGULATION ²	V _{IN} = 17 to 40 VDC	—	—	10	—	15	50	—	15	50	—	15	50	mV		
LOAD REGULATION	NO LOAD TO FULL	—	—	10	—	15	50	—	15	50	—	15	50	mV		
INPUT VOLTAGE ¹	NO LOAD TO FULL	17	28	40	17	28	40	17	28	40	17	28	40	VDC		
INPUT CURRENT ¹	NO LOAD	—	30	75	—	35	75	—	35	75	—	35	75	mA		
	INHIBITED	—	7	8	—	3	8	—	3	8	—	3	8	mA		
INPUT RIPPLE CURRENT	10 kHz – 10 MHz	—	5	10	—	5	10	—	5	10	—	5	10	mA p-p		
EFFICIENCY	INCLUDES FILTER	25°C		73	75	—	75	77	—	79	82	—	80	83	%	
		70	72	—	72	74	—	76	78	—	77	79				
LOAD FAULT ³	POWER DISSIPATION	—	—	10	—	—	10	—	—	10	—	—	10	W		
	SHORT CIRCUIT 25°C	—	—	12	—	—	12	—	—	12	—	—	12			
	-55°C TO +125°C	—	—	12	—	—	12	—	—	12	—	—	12			
	RECOVERY ^{4, 6}	—	1.4	6	—	1.4	5	—	1.4	5	—	1.4	5	ms		
STEP LOAD RESP.	50% – 100% – 50%	—	—	—	—	—	—	—	—	—	—	—	—	mV pk		
	TRANSIENT	—	±125	±250	—	±200	±300	—	±250	±400	—	±350	±500			
	RECOVERY ^{4, 6}	—	—	200	—	60	200	—	60	200	—	60	200		µs	
STEP LINE RESP. ⁶	17 – 40 – 17 VDC	—	—	—	—	—	—	—	—	—	—	—	—	mV pk		
	TRANSIENT ⁵	—	—	±300	—	±200	±300	—	±400	±500	—	±500	±600			
	RECOVERY ⁴	—	—	300	—	—	300	—	—	300	—	—	300		µs	
START-UP ¹	DELAY	—	1.4	5	—	1.4	5	—	1.4	5	—	1.4	5	ms		
	OVERSHOOT ⁶	—	—	—	—	—	—	—	—	—	—	—	—	mV pk		
	FULL LOAD	—	0	50	—	0	50	—	0	120	—	0	150			
	NO LOAD	—	33	150	—	50	250	—	120	600	—	150	750			

Notes

- Tc = -55°C to +125°C
- Operation is limited below 17V (see Figure 19).
- Indefinite short circuit protection not guaranteed above 125°C case.
- Recovery time is measured from application of the transient to point at which Vout is within 1% of final value.
- Transition time ≥ 10 µs.
- Parameter shall be tested as part of device characterization and after design and process changes. Thereafter, parameters shall be guaranteed to the limits specified in the electrical Characteristics table.



DC/DC CONVERTERS

FMTR SERIES 30 WATT

Electrical Characteristics: -55°C to +125°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

DUAL OUTPUT MODELS			FMTR2805D			FMTR2812D			FMTR2815D			UNITS
PARAMETER	CONDITIONS		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	25°C	+V _{OUT}	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	VDC
		-V _{OUT}	4.90	5.00	5.08	11.80	12.00	12.18	14.76	15.00	15.23	
	-55°C TO +125°C	+V _{OUT}	4.85	5.00	5.15	11.64	12.00	12.36	14.55	15.00	15.45	
		-V _{OUT}	4.80	5.00	5.18	11.56	12.00	12.42	14.46	15.00	15.53	
OUTPUT CURRENT ^{1, 2}	V _{IN} = 17 TO 40 VDC		0	2.5	4.5	0	1.25	2.25	0	1.0	1.8	A
OUTPUT POWER ^{1, 2}	V _{IN} = 17 TO 40 VDC		0	—	25	0	—	30	0	—	30	W
OUTPUT RIPPLE VOLTAGE ±V _{OUT}	10 kHz - 2 MHz	25°C	—	75	140	—	25	80	—	40	80	mV p-p
			—	—	180	—	—	120	—	—	120	
LINE REGULATION V _{IN} = 17 TO 40VDC		+V _{OUT}	—	10	50	—	10	50	—	10	50	mV
		-V _{OUT}	—	50	100	—	50	150	—	50	180	
LOAD REGULATION NO LOAD TO FULL		+V _{OUT}	—	5	50	—	15	50	—	15	50	mV
		-V _{OUT}	—	45	120	—	45	170	—	40	190	
CROSS REGULATION EFFECT ON -V _{OUT}	25°C SEE NOTES 4 & 9		—	8	—	—	5	—	—	3	—	%
	25°C SEE NOTES 5 & 9		—	5	—	—	4	—	—	4	—	
INPUT VOLTAGE ¹ NO LOAD TO FULL	CONTINUOUS		17	28	40	17	28	40	17	28	40	VDC
	TRANSIENT 50 ms		0	—	50	0	—	50	0	—	50	V
INPUT CURRENT	NO LOAD		—	35	75	—	50	75	—	50	75	mA
	INHIBITED		—	3	8	—	3	8	—	3	8	mA
INPUT RIPPLE CURRENT ¹	10 kHz - 10 MHz		—	5	10	—	5	10	—	5	10	mA p-p
EFFICIENCY	25°C		75	77	—	78	80	—	79	82	—	%
			72	74	—	75	77	—	76	78	—	
LOAD FAULT ⁶	POWER DISSIPATION		—	—	10	—	—	10	—	—	10	W
	SHORT CIRCUIT	25°C	—	—	12	—	—	12	—	—	12	
	RECOVERY ⁹		—	1.4	5.0	—	1.4	5.0	—	1.4	5.0	
STEP LOAD RESPONSE ±V _{OUT}	50 - 100 - 50% BALANCED TRANSIENT		—	±200	±300	—	±150	±300	—	±200	±400	mV pk
	RECOVERY ^{7, 9}		—	100	200	—	100	200	—	100	200	µs
	17 - 40 - 17 V _{IN} TRANSIENT ⁸		—	±200	±400	—	±200	±400	—	±400	±500	mV pk
STEP LINE ⁹ RESPONSE ±V _{OUT}	RECOVERY ⁷		—	—	300	—	—	300	—	—	300	µs
	DELAY		—	1.4	5	—	1.4	5	—	1.4	5	ms
START-UP ¹	OVERSHOOT ⁹		—	0	50	—	0	120	—	0	150	mV pk
	FULL LOAD		—	50	250	—	120	600	—	150	750	
	NO LOAD		—	50	250	—	120	600	—	150	750	


Notes

- Tc = -55°C to +125°C.
- Up to 90% of the total output current/power is available from either output providing the positive output is carrying at least 10% of the total output power.
- Operation is limited below 17 V (see Figure 19).
- Effect on the negative output under the following conditions:
+P_{out} 20% to 80%; -P_{out} 80% to 20%
- Effect on the negative output under the following conditions:
+P_{out} 50%; -P_{out} 10% to 50%
- Indefinite short circuit protection not guaranteed above 125°C case.
- Recovery time is measured from application of the transient to point at which V_{out} is within 1% of final value.
- Transition time ≥ 10 µs.
- Parameter shall be tested as part of device characterization and after design and process changes. Thereafter, parameters shall be guaranteed to the limits specified in the electrical Characteristics table.

FMTR SERIES 30 WATT

DC/DC CONVERTERS

TRIM AND REMOTE SENSE (AVAILABLE ON SINGLE OUTPUT MODELS ONLY)

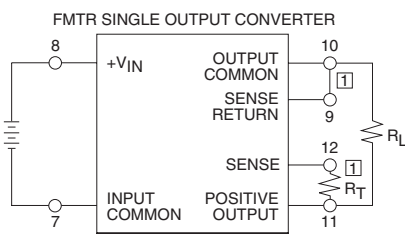

EXTERNAL TRIM CONNECTION
① Make connections at converter.

FIGURE 2: TRIM CONNECTION^{1, 2, 3}

Trim Formulas


Vout = desired output voltage; Rt = trim resistor

$$3.3V: R_t = \frac{1300 * V_{out} - 4304}{1.2475}$$

$$5V: R_t = \frac{1300 * V_{out} - 6512}{1.2475}$$

$$12V: R_t = \frac{1300 * V_{out} - 15631}{1.2475}$$

$$15V: R_t = \frac{1300 * V_{out} - 19498}{1.2475}$$

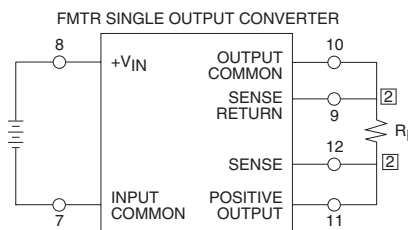

REMOTE SENSE CONNECTION
② Make connections at load.


FIGURE 3: REMOTE SENSE^{2, 3}

Notes for Remote Sense and Trim

1. When trimming output voltage and/or remote sensing, the total output voltage increase must be less than 0.6 volts at the converters pins to maintain specified performance.
2. If neither voltage trim nor remote sense will be used, connect pin 9 to pin 10 and pin 11 to pin 12 or the output voltage will increase by 1.2 volts
3. CAUTION: The converter will be permanently damaged if the positive remote sense (pin 12) is shorted to ground. Damage may also result if the output common or positive output is disconnected from the load with the remote sense leads connected to the load.

PIN OUT

Angled corner indicates pin one.

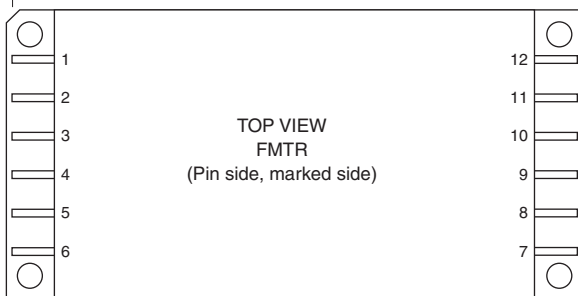


See page 7 for dimensions.

FIGURE 4: PIN OUT

Pin	Single Output	Dual Output
1	Sync	Sync
2	Inhibit/Sync Rtn	Inhibit/Sync Rtn
3	Filter Out Rtn	Filter Out Rtn
4	Filter Out	Filter Out
5	Inhibit	Inhibit
6	No connection	No connection
7	Input Common	Input Common
8	28 V Input	28V Input
9	Sense Rtn	No connection
10	Output Common	Negative Output
11	Positive Output	Output Common
12	Positive Sense	Positive Output

DC/DC CONVERTERS

FMTR SERIES 30 WATT

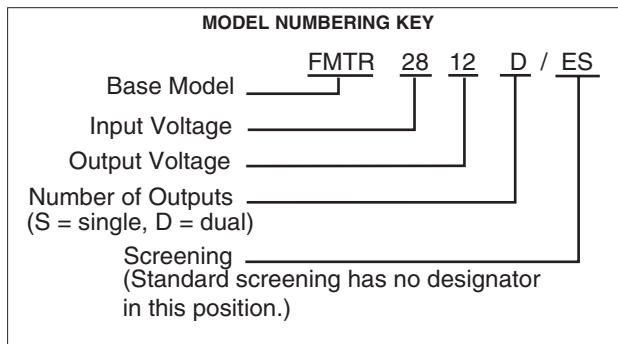

Typical Performance Curves: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

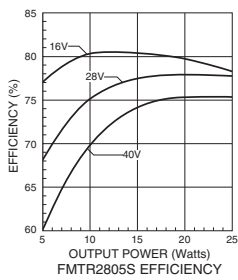


FIGURE 5

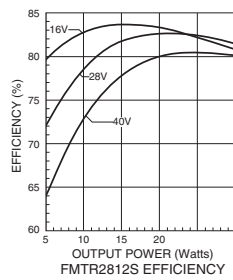


FIGURE 6

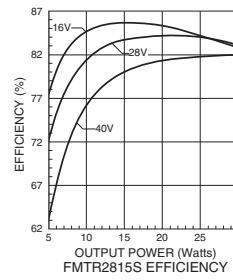


FIGURE 7

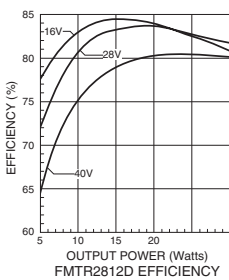


FIGURE 8

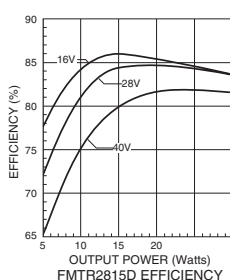


FIGURE 9

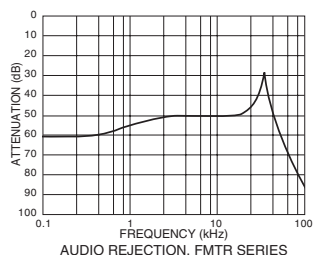


FIGURE 10

FMTR SERIES 30 WATT

DC/DC CONVERTERS

Typical Performance Curves: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

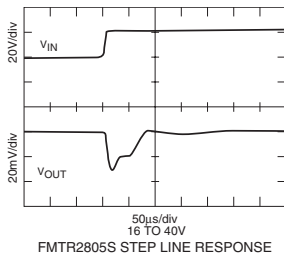


FIGURE 11

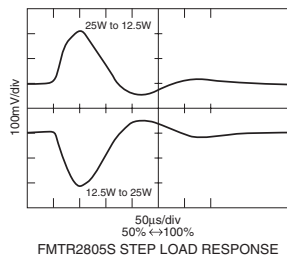


FIGURE 12

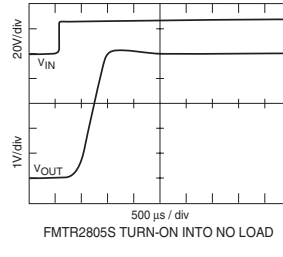


FIGURE 13

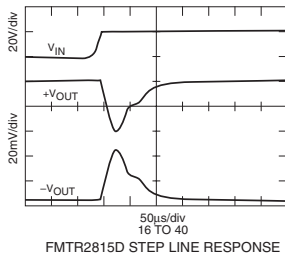


FIGURE 14

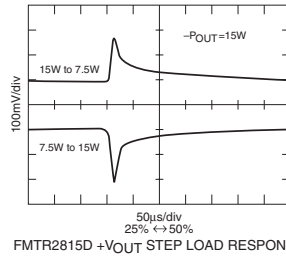


FIGURE 15

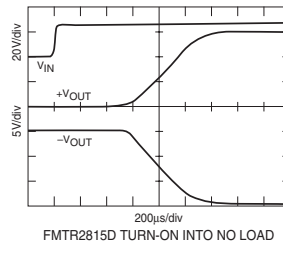


FIGURE 16

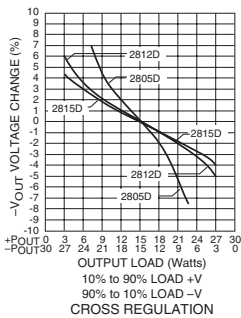


FIGURE 17

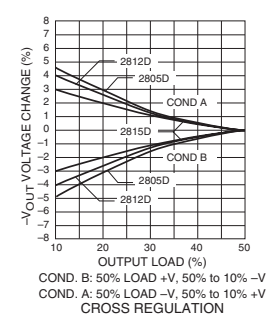


FIGURE 18



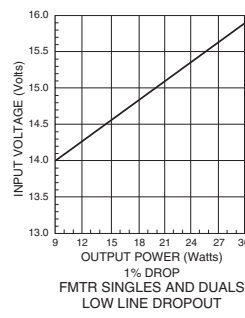


FIGURE 19

DC/DC CONVERTERS

FMTR SERIES 30 WATT

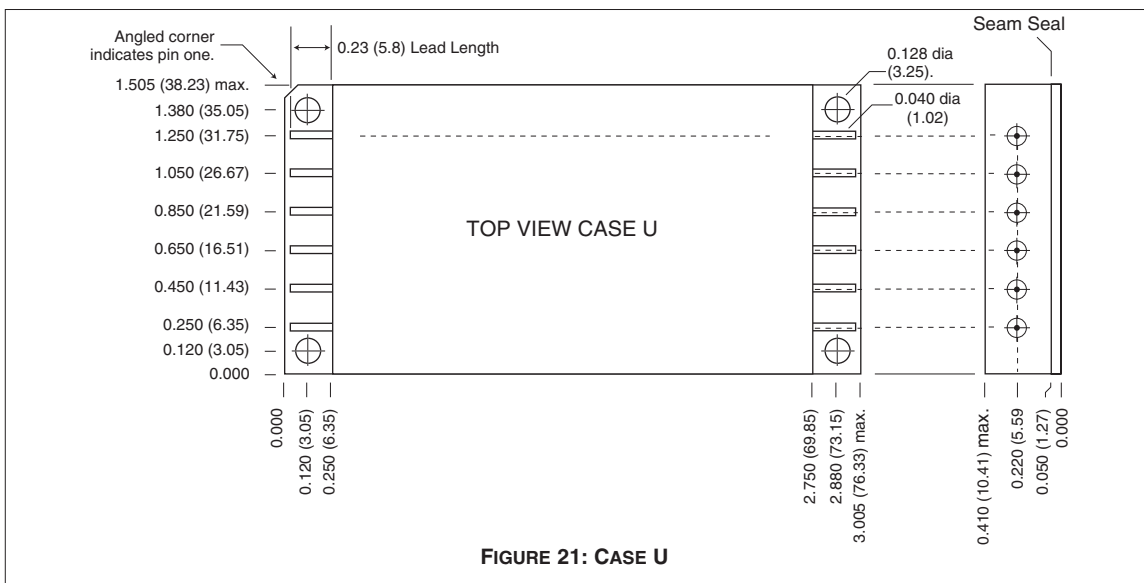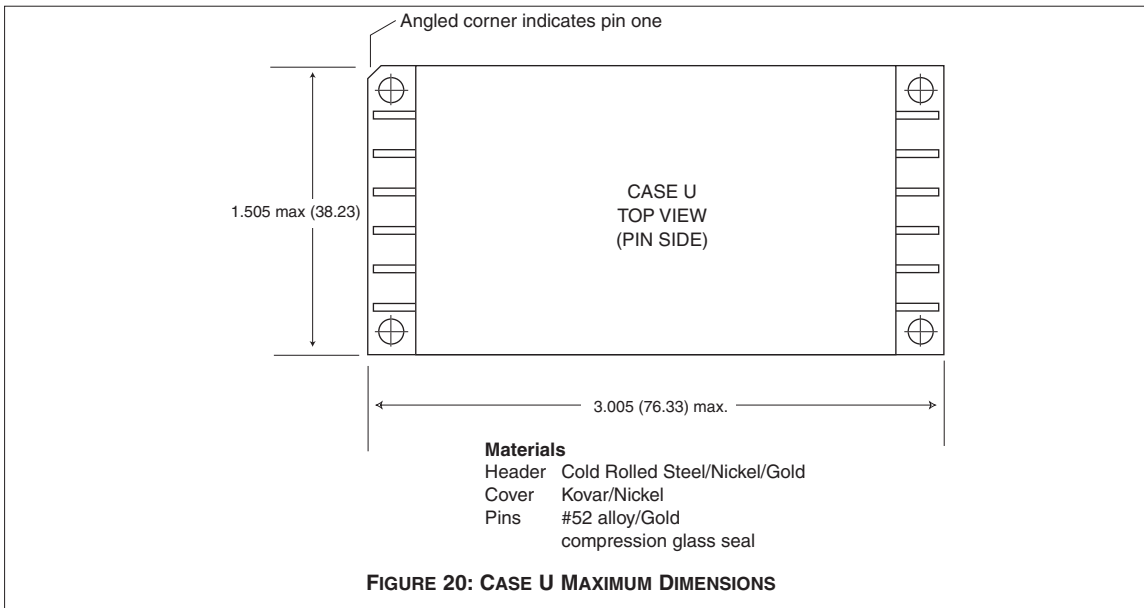

CAUTION

Heat from reflow or wave soldering may damage the device. Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin.

Case dimensions in inches (mm)

Tolerance ± 0.005 (0.13) for three decimal places, ± 0.01 (0.2) for two decimal places unless otherwise specified

Although every effort has been made to render the case drawings at actual size, variations in the printing process may cause some distortion. Please refer to the numerical dimensions for accuracy.

**FMTR SERIES
30 WATT**

DC/DC CONVERTERS

ENVIRONMENTAL SCREENING

TEST	125°C STANDARD	125°C /ES
PRE-CAP INSPECTION 25°C Method 2017, 2032	yes	yes
TEMPERATURE CYCLE (10 times) Method 1010, Cond. B, -55°C to 125°C	no	yes
CONSTANT ACCELERATION 25°C Method 2001, 500 g	no	yes
BURN-IN 96 hours at 125°C case (typical)	no	yes
FINAL ELECTRICAL TEST MIL-PRF-38534, Group A Subgroups 1 and 4: +25°C case	yes	yes
HERMETICITY TESTING 25°C Fine Leak, Method 1014, Cond. A Gross Leak, Method 1014, Cond. C Gross Leak, Dip (1 x 10 ⁻³)	no no yes	yes yes no
FINAL VISUAL INSPECTION 25°C Method 2009	yes	yes

Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.

Contact Information:

www.interpoint.com

Interpoint Headquarters USA
Phone: 1-800-822-8782
+425-882-3100
Email: power@intp.com

Interpoint UK
Phone: +44-1252-872266
Email: poweruk@intp.com

Interpoint France
Phone: +33-134285455
Email: powerfr@intp.com