

The RF Line

High Output Mirror Power Doubler

860 MHz CATV Amplifier


MHW8205R

- Specified for 77, 110 and 128-Channel Performance
- Broadband Power Gain — @ $f = 40\text{--}860\text{ MHz}$
 $G_p = 20.2\text{ dB (Typ)}$
- Broadband Noise Figure
 $NF = 7\text{ dB (Typ)}$ @ 860 MHz
- All Gold Metallization
- 7 GHz f_T Ion-Implanted Transistors
- Composite Triple Beat — @ 128-Channel Loading
 $CTB = -66\text{ dB (Typ)}$

20.2 dB GAIN
860 MHz
128-CHANNEL
CATV AMPLIFIER

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V_{in}	+70	dBmV
DC Supply Voltage	V_{CC}	+28	Vdc
Operating Case Temperature Range	T_C	-20 to +100	°C
Storage Temperature Range	T_{stg}	-40 to +100	°C

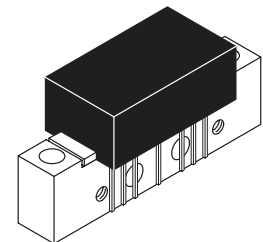

CASE 714Y-03, STYLE 2

ELECTRICAL CHARACTERISTICS ($V_{CC} = 24\text{ Vdc}$, $T_C = +30^\circ\text{C}$, 75 Ω system unless otherwise noted)


Characteristic	Symbol	Min	Typ	Max	Unit	
Frequency Range	BW	40	—	860	MHz	
Power Gain 860 MHz	G_p	19.3 20	19.8 20.2	20.3 21.5	dB	
Slope 40-860 MHz	S	0	.4	1.5	dB	
Gain Flatness (40-860 MHz, Peak to Valley)	—	—	0.3	1.0	dB	
Return Loss — Input/Output ($Z_0 = 75\text{ Ohms}$) @ $f > 40\text{ MHz}$ (Derate)	IRL/ORL	19 —	— —	— 0.006	dB dB/MHz	
Composite Second Order ($V_{out} = +40\text{ dBmV/ch.}$, Worst Case) ($V_{out} = +44\text{ dBmV/ch.}$, Worst Case)	128-Channel FLAT 110-Channel FLAT 77-Channel FLAT	CSO_{128} CSO_{110} CSO_{77}	— — —	-69 -70 -80	-60 -63 -68	dBc
Cross Modulation Distortion @ Ch 2 ($V_{out} = +40\text{ dBmV/ch.}$, FM = 55 MHz) ($V_{out} = +44\text{ dBmV/ch.}$, FM = 55 MHz)	128-Channel FLAT 110-Channel FLAT 77-Channel FLAT	XMD_{128} XMD_{110} XMD_{77}	— — —	-72 -67 -71	-64 -62 -68	dBc
Composite Triple Beat ($V_{out} = +40\text{ dBmV/ch.}$, Worst Case) ($V_{out} = +44\text{ dBmV/ch.}$, Worst Case)	128-Channel FLAT 110-Channel FLAT 77-Channel FLAT	CTB_{128} CTB_{110} CTB_{77}	— — —	-66 -63 -71	-63 -61 -69	dBc
Noise Figure	50 MHz 550 MHz 750 MHz 860 MHz	NF	— — — —	5.0 5.8 6.2 7.0	6.0 — — 8.0	dB
DC Current ($V_{DC} = 24\text{ V}$, $T_C = 30^\circ\text{C}$)	I_{DC}	365	400	435	mA	

ARCHIVE INFORMATION

ARCHIVE INFORMATION



PACKAGE DIMENSIONS

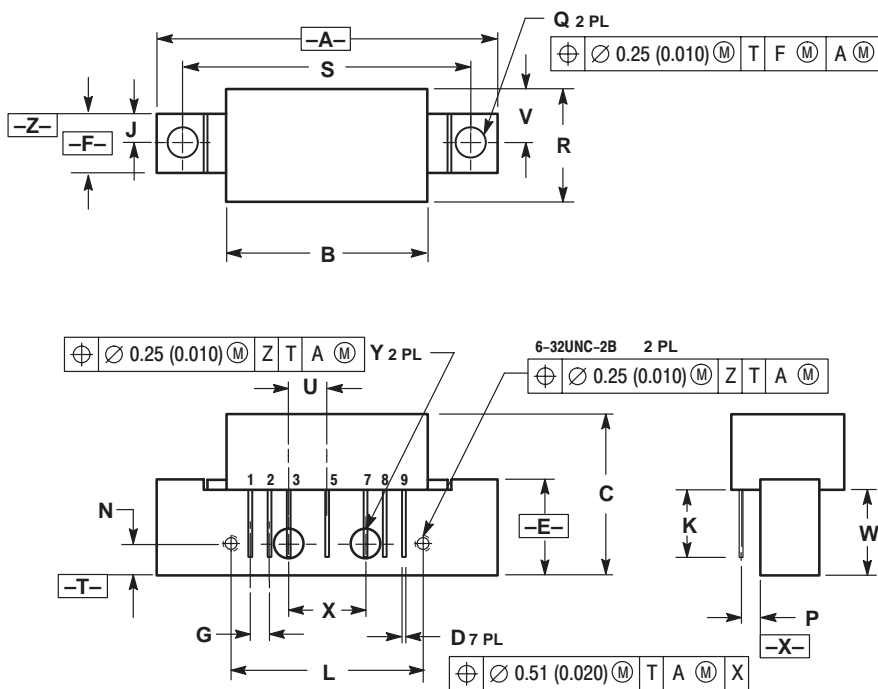

NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	----	1.775	----	45.08
B	----	1.085	----	27.56
C	----	0.840	----	21.34
D	0.018	0.022	0.46	0.56
E	0.465	0.510	11.81	12.95
F	0.300	0.325	7.62	8.25
G	0.100 BSC		2.54 BSC	
J	0.156 BSC		3.96 BSC	
K	0.315	0.355	8.00	8.50
L	1.00 BSC		25.40 BSC	
N	0.165 BSC		4.19 BSC	
P	0.100 BSC		2.54 BSC	
Q	0.148	0.168	3.76	4.27
R	----	0.600	----	15.24
S	1.500 BSC		38.10 BSC	
U	0.200 BSC		5.08 BSC	
V	----	0.250	----	6.35
W	0.435	0.450	11.05	11.43
X	0.400 BSC		10.16 BSC	
Y	0.152	0.163	3.85	4.15

STYLE 2:
 PIN 1. RF OUTPUT
 2. GROUND
 3. GROUND
 4. DELETED
 5. VDC
 6. DELETED
 7. GROUND
 8. GROUND
 9. RF INPUT

CASE 714Y-03
 ISSUE D

ARCHIVE INFORMATION

ARCHIVE INFORMATION

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
 P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 141,
 4-32-1 Nishi-Gotanda, Shagawa-ku, Tokyo, Japan. 03-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFA0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
 – http://sps.motorola.com/mfax/

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

HOME PAGE: http://motorola.com/sps/

