


Silicon Dual Power Rectifier

ST3020 – ST30100

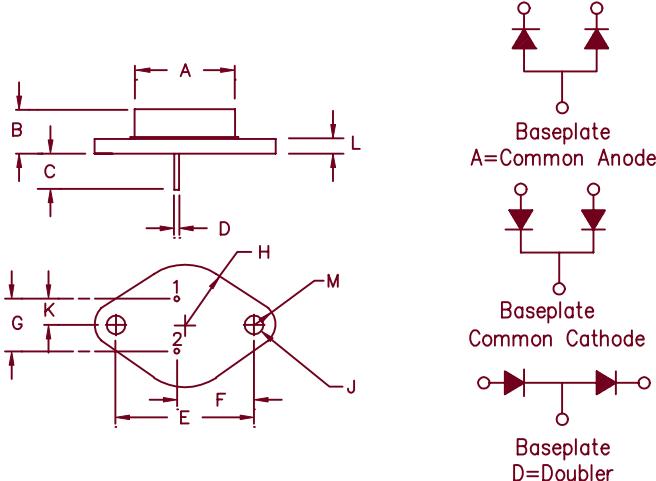

Dim. Inches		Millimeter			
	Minimum	Maximum	Minimum	Maximum	Notes
A	—	.875	—	22.23	Dia.
B	.250	.450	6.35	11.43	
C	.312	—	7.92	—	
D	.038	.043	.97	1.09	Dia.
E	1.177	1.197	29.90	30.40	
F	.655	.675	16.64	17.15	
G	.420	.440	10.67	11.18	
H	—	.525	—	13.34	Rad.
J	.151	.161	3.84	4.09	Dia.
K	.205	.225	5.21	5.72	
L	—	.135	—	3.43	
M	—	.188	—	4.78	Rad.

T0-204AA (T0-3)

Microsemi Catalog Number	Peak Reverse Voltage
ST3020*	200V
ST3040*	400V
ST3060*	600V
ST3080*	800V
ST30100*	1000V

- Glass Passivated Die
 - Glass to metal seal construction
 - V_{RRM} 200 to 1000V
 - 250A Surge Rating
 - Available as Common Anode, Common Cathode, or Doubler

Electrical Characteristics

Average forward current per leg (standard)	F(AV) 15 Amps	TC = 125°C, half sine wave, R _{θJC} = 1.4°C/W
Average forward current per leg (reverse)	F(AV) 15 Amps	TC = 82°C, half sine wave, R _{θJC} = 2.2°C/W
Maximum surge current	FSM 250 Amps	8.3ms, half sine, TJ = 200°C
Max I _{2t} for fusing	I _{2t} 260 A ² s	
Max peak forward voltage	V _{FM} 1.2 Volts	FM = 15A; TJ = 25°C*
Max peak reverse current	RM 10 μA	V _{RRM} , TJ = 25°C
Max peak reverse current	RM 1.0 mA	V _{RRM} , TJ = 150°C
Max Recommended Operating Frequency	10kHz	

*Pulse test: Pulse width 300 μ sec. Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range	T _{STG}	-65°C to 200°C
Operating junction temp range	T _J	-65°C to 200°C
Maximum thermal resistance (standard polarity)	R _{θJC}	1.4°C/W Junction to Case
Maximum thermal resistance (reverse polarity)	R _{θJC}	2.2°C/W Junction to Case
Typical thermal resistance (greased)	R _{θCS}	0.5°C/W Case to sink
Weight		1.0 ounces (28 grams) typical

ST3020 – ST30100

Figure 1
Typical Forward Characteristics – Per Leg



Figure 2
Typical Reverse Characteristics – Per Leg

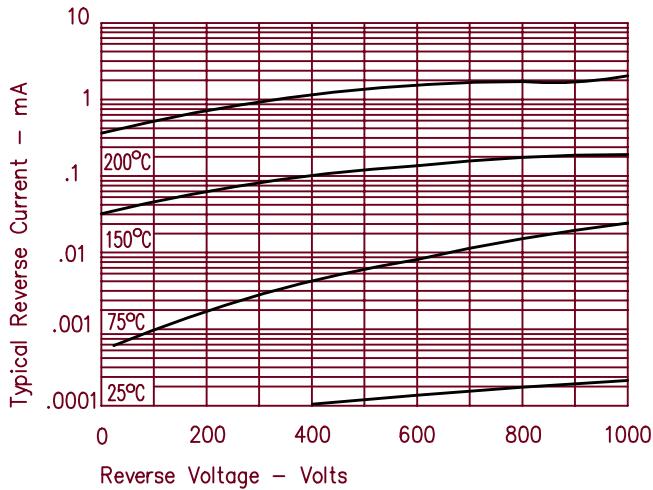


Figure 3
Forward Current Derating – Per Leg – Standard Polarity

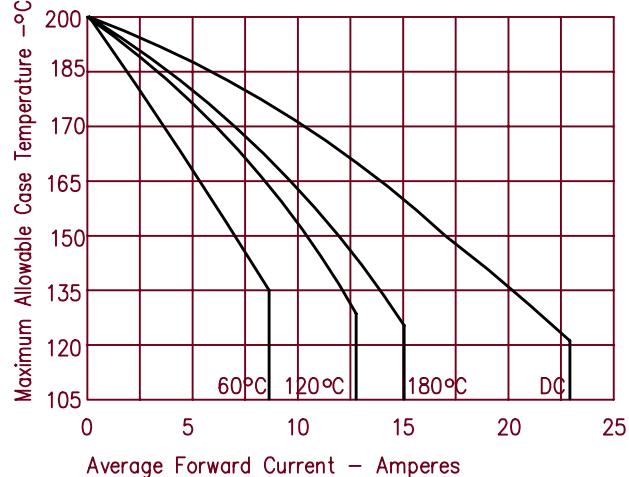


Figure 4
Maximum Forward Power Dissipation – Per Leg – Standard Polarity


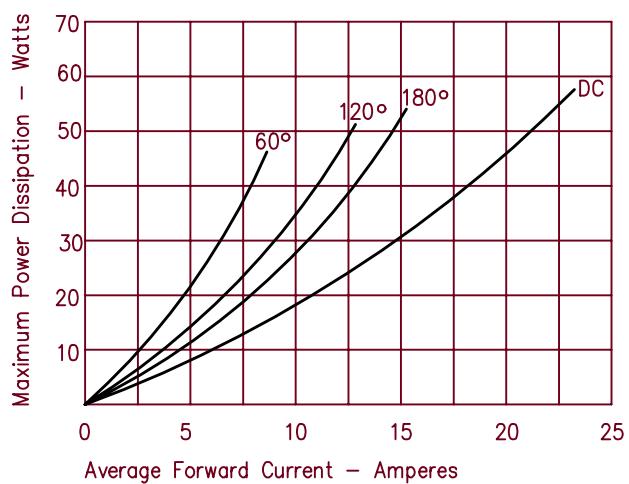


Figure 5
Forward Current Derating – Per Leg – Reverse Polarity

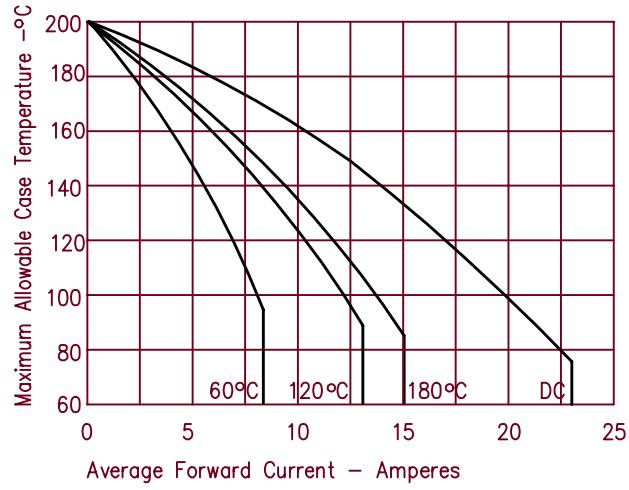

ST3020 - ST30100

Figure 6
Maximum Forward Power Dissipation – Per Leg – Reverse Polarity

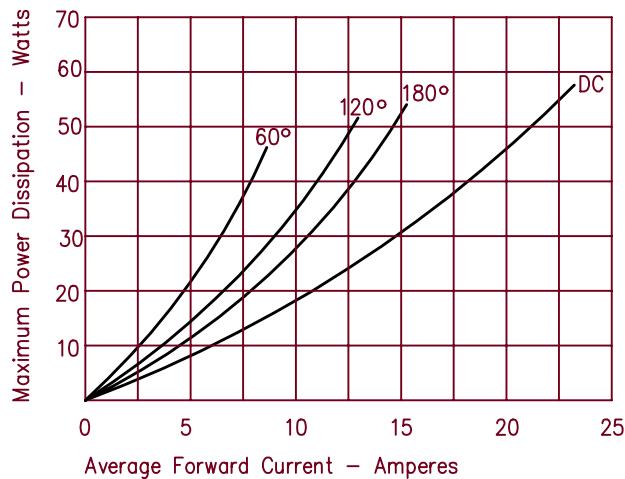


Figure 7
Transient Thermal Impedance – Per Leg – Standard Polarity

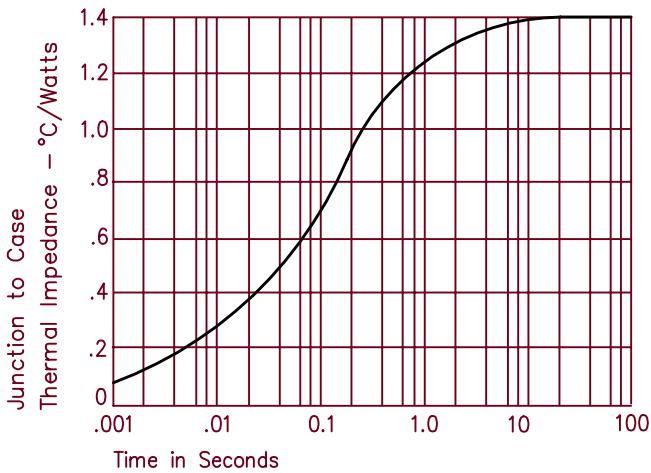


Figure 8
Transient Thermal Impedance – Per Leg – Reverse Polarity

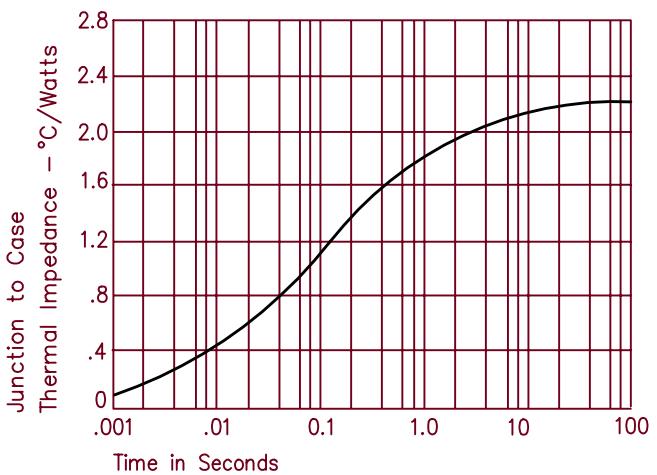


Figure 9
Maximum Nonrepetitive Surge Current – Per Leg

