




### PNP Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ( $R_1 = 4.7\text{k }\Omega$ )
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

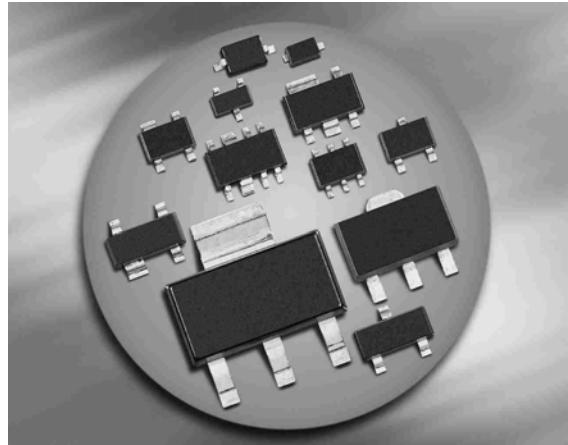

**BCR169/F/L3**  
**BCR169T/W**

**BCR169S**  
**BCR169U**



Type	Marking	Pin Configuration						Package
BCR169	WSs	1=B	2=E	3=C	-	-	-	SOT23
BCR169F	WSs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR169L3	WS	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR169S	WSs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT323
BCR169T	WSs	1=B	2=E	3=C	-	-	-	SC75
BCR169U	WSs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SC74
BCR169W	WSs	1=B	2=E	3=C	-	-	-	SOT323

**Maximum Ratings**

Parameter	Symbol	Value	Unit
Collector-emitter voltage	$V_{CEO}$	50	V
Collector-base voltage	$V_{CBO}$	50	
Emitter-base voltage	$V_{EBO}$	5	
Input on voltage	$V_{i(on)}$	15	
Collector current	$I_C$	100	mA
Total power dissipation- BCR169, $T_S \leq 102^\circ\text{C}$ BCR169F, $T_S \leq 128^\circ\text{C}$ BCR169L3, $T_S \leq 135^\circ\text{C}$ BCR169S, $T_S \leq 115^\circ\text{C}$ BCR169T, $T_S \leq 109^\circ\text{C}$ BCR169U, $T_S \leq 118^\circ\text{C}$ BCR169W, $T_S \leq 124^\circ\text{C}$	$P_{tot}$	200 250 250 250 250 250 250	mW
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-65 ... 150	

**Thermal Resistance**

Parameter	Symbol	Value	Unit
Junction - soldering point <sup>1)</sup> BCR169 BCR169F BCR169L3 BCR169S BCR169T BCR169U BCR169W	$R_{thJS}$	$\leq 240$ $\leq 90$ $\leq 60$ $\leq 140$ $\leq 165$ $\leq 133$ $\leq 105$	K/W

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	100	nA
DC current gain <sup>1)</sup> $I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{\text{FE}}$	120	-	630	-
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	$V_{\text{CEsat}}$	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(\text{off})}$	0.4	-	0.8	
Input on voltage $I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$	$V_{i(\text{on})}$	0.5	-	1.1	
Input resistor	$R_1$	3.2	4.7	6.2	k $\Omega$

**AC Characteristics**


Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	$f_T$	-	200	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{cb}$	-	3	-	pF

<sup>1</sup>Pulse test:  $t < 300\mu\text{s}$ ;  $D < 2\%$


**DC current gain  $h_{FE} = f(I_C)$**   
 $V_{CE} = 5 \text{ V}$  (common emitter configuration)

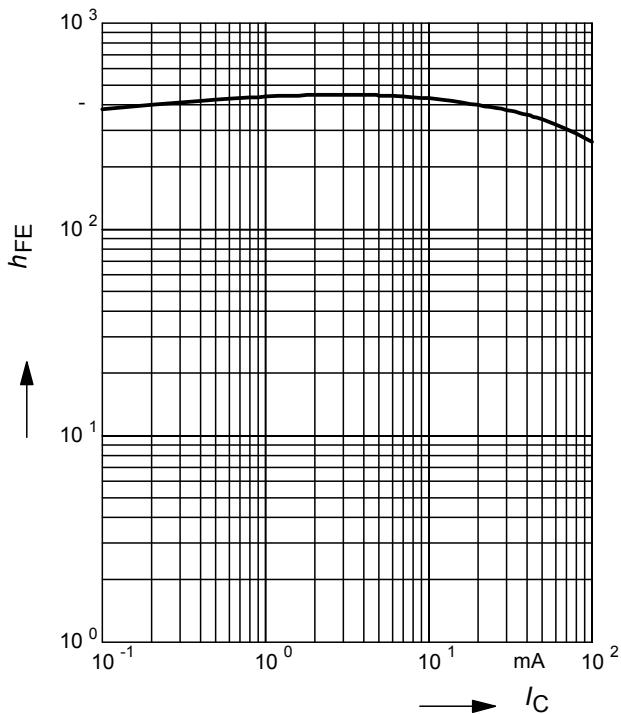


**Input on Voltage  $V_{i(on)} = f(I_C)$**   
 $V_{CE} = 0.3 \text{ V}$  (common emitter configuration)

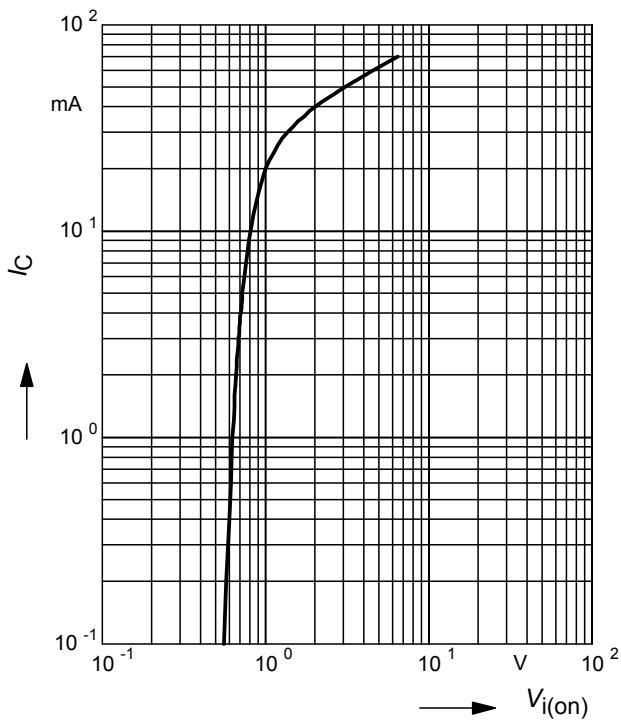


**Collector-emitter saturation voltage**  
 $V_{CEsat} = f(I_C), h_{FE} = 20$

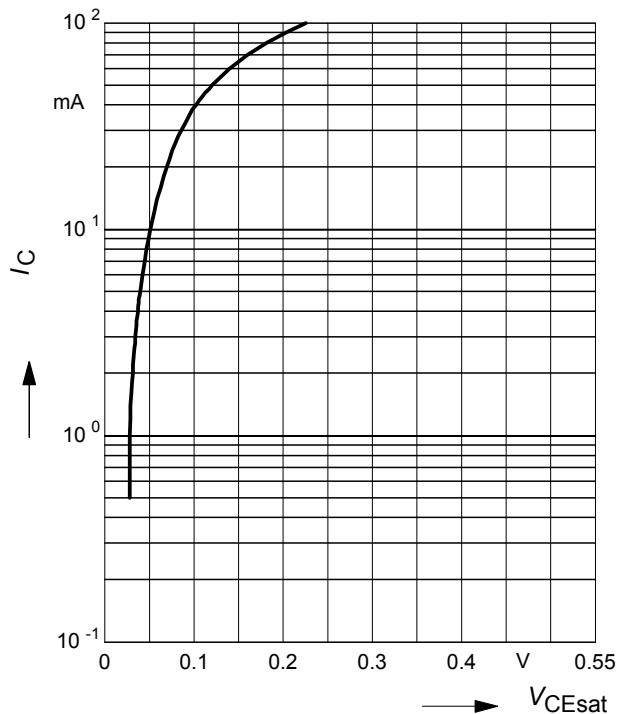


**Input off voltage  $V_{i(off)} = f(I_C)$**   
 $V_{CE} = 5 \text{ V}$  (common emitter configuration)

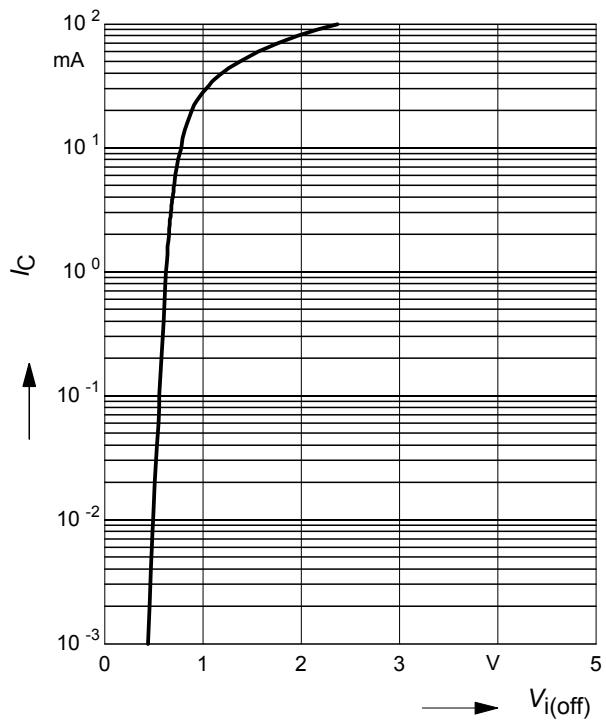


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR169

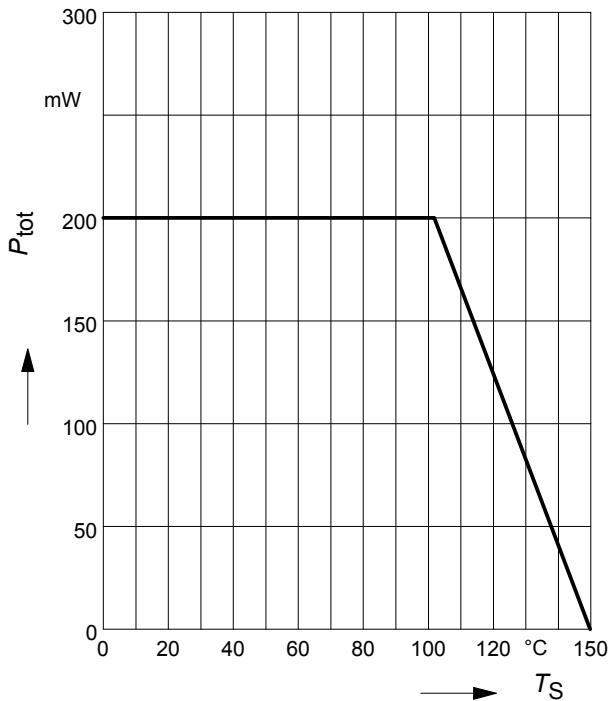


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR169L3

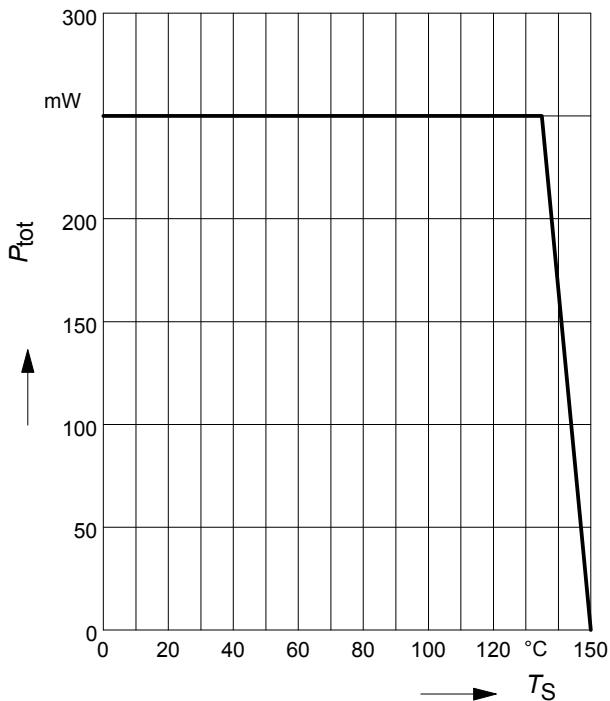


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR169F

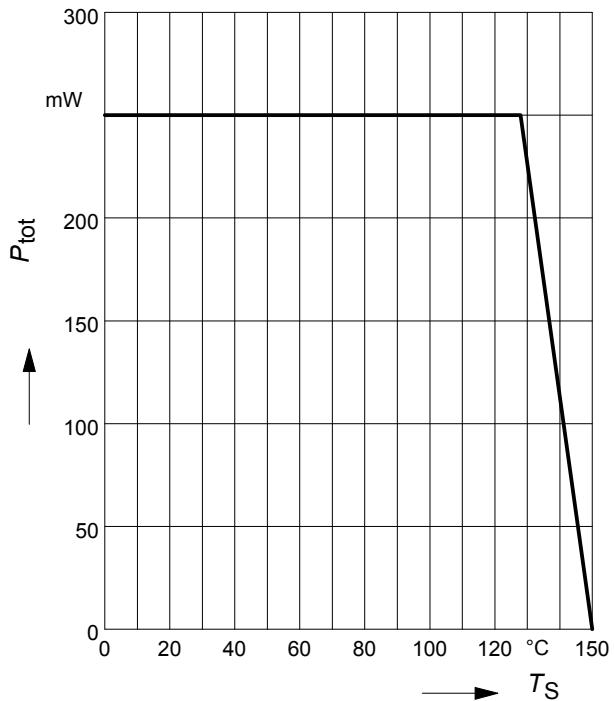


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR169S

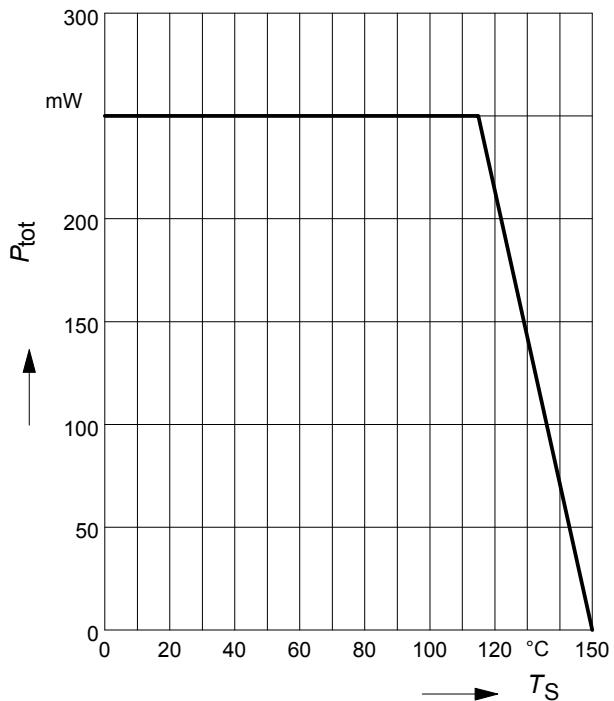


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR169T

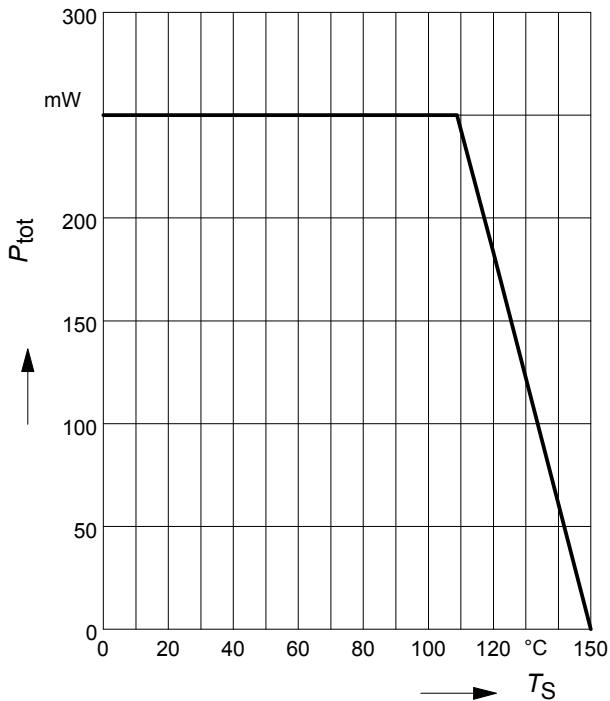


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR169W

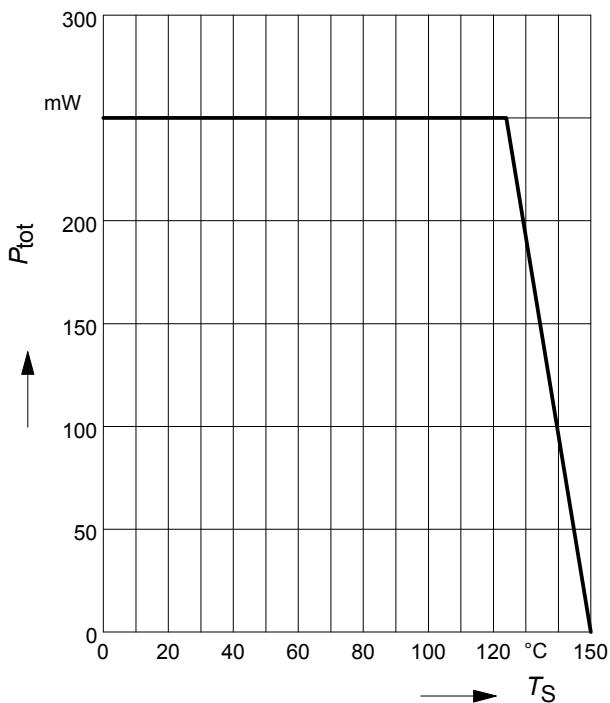

**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR169U

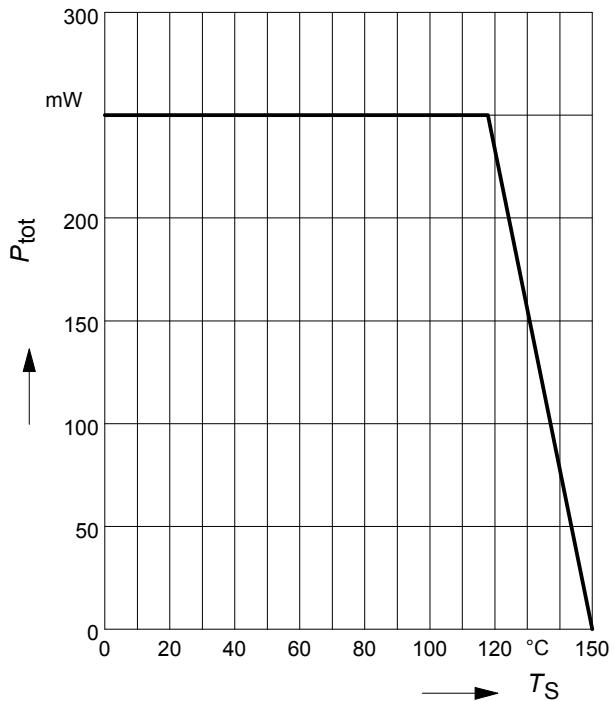


**Permissible Pulse Load  $R_{\text{thJS}} = f(t_p)$**   
BCR169

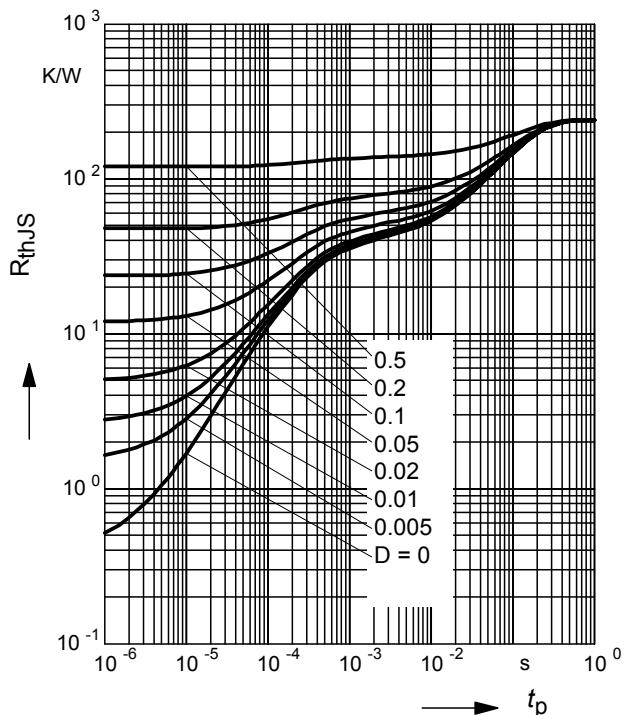

**Permissible Pulse Load**


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR169

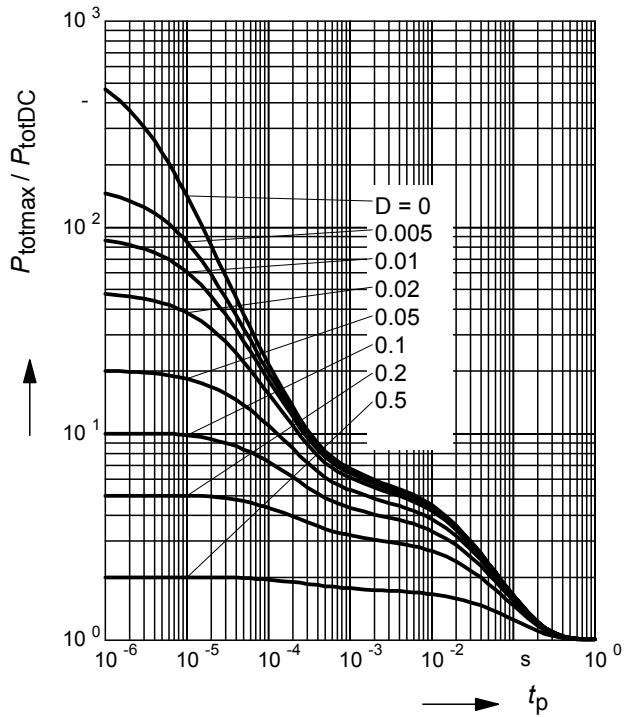

**Permissible Pulse Load**

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$


BCR169F

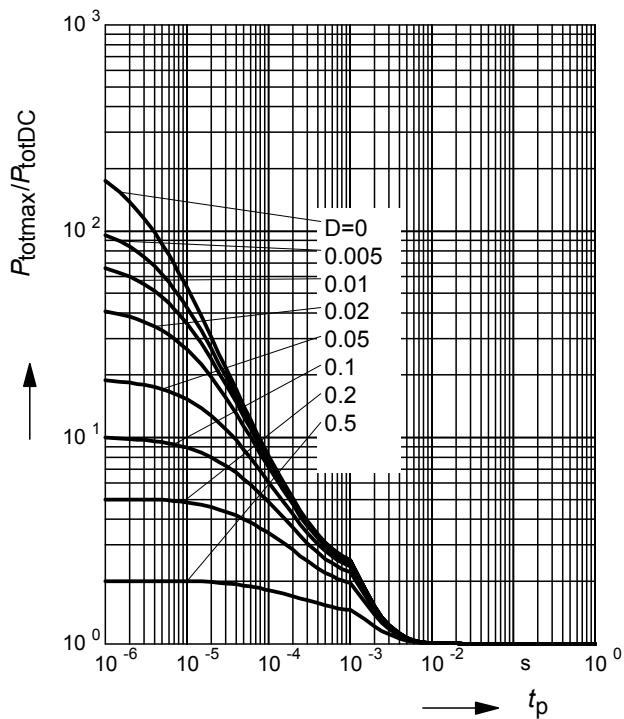
**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR169F

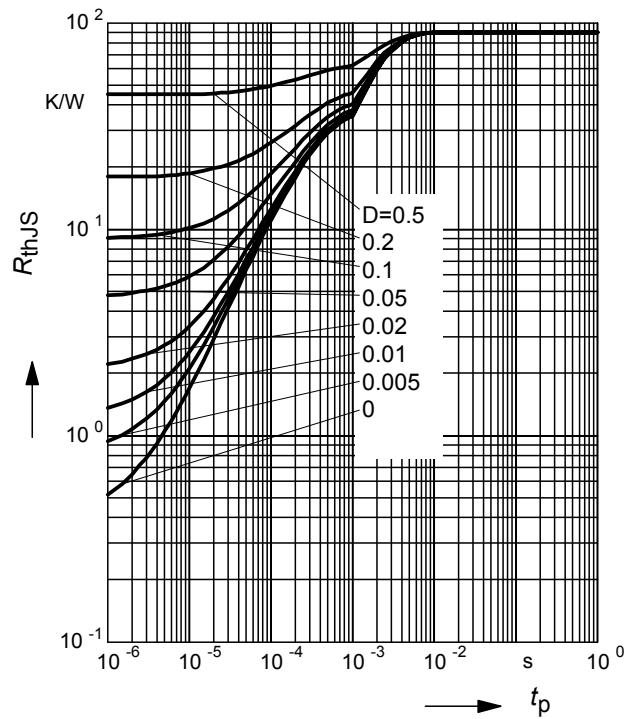
**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 


BCR169L3

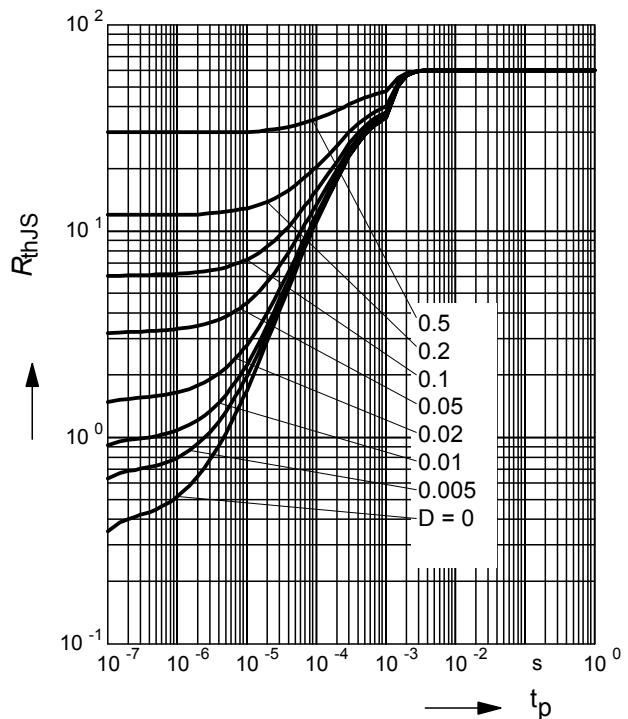


**Permissible Pulse Load**

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR169L3

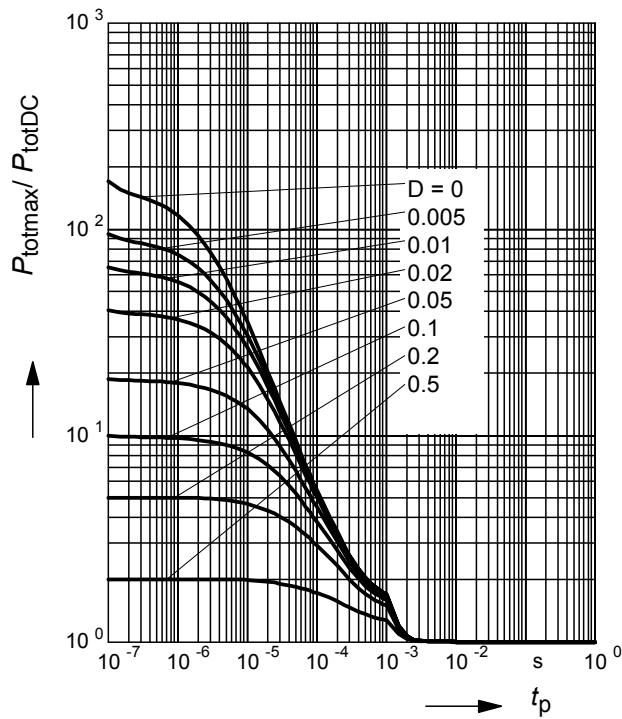

**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR169S

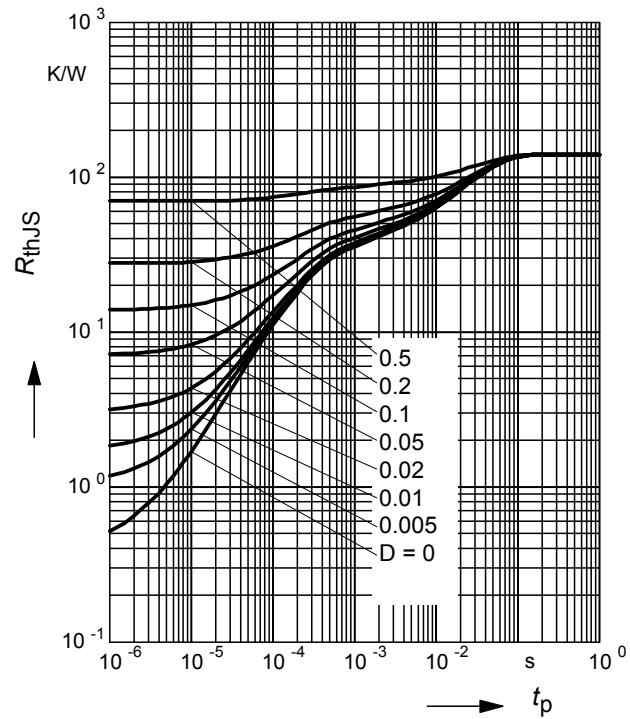

**Permissible Pulse Load**

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR169S

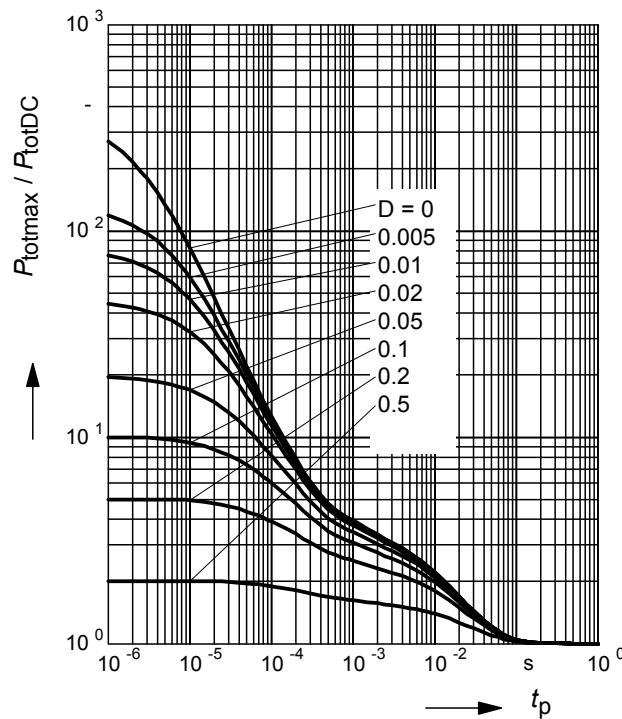
**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 


BCR169T

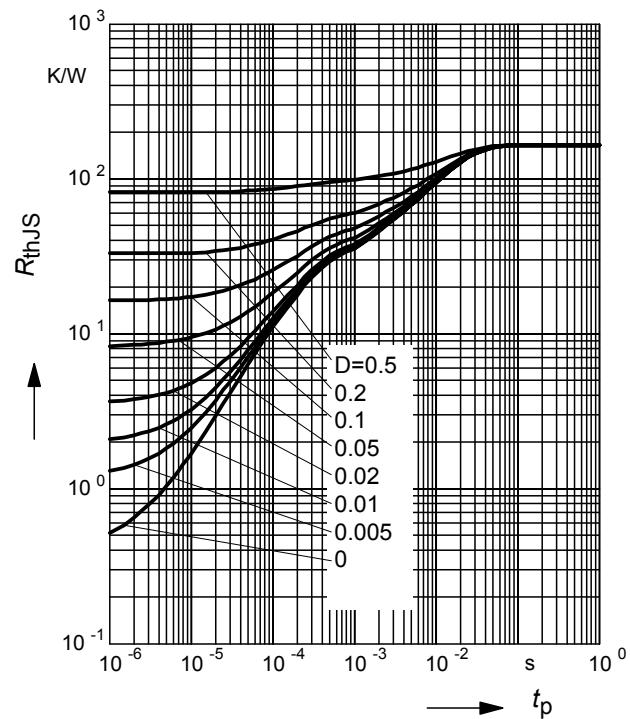

**Permissible Pulse Load**


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR169T

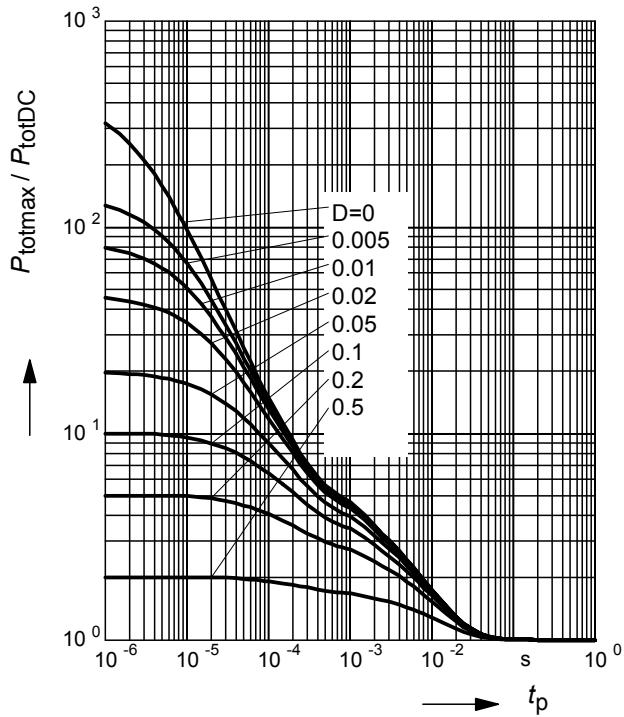

**Permissible Pulse Load**

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$


BCR169U

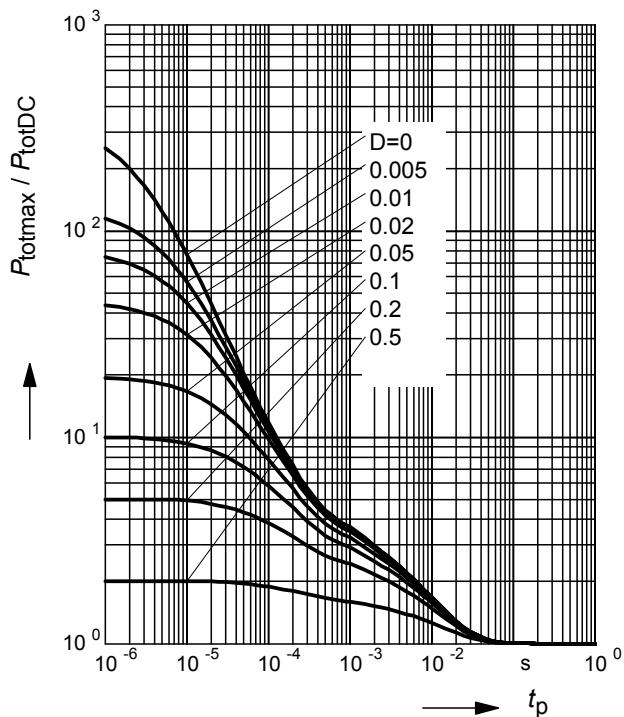
**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR169U

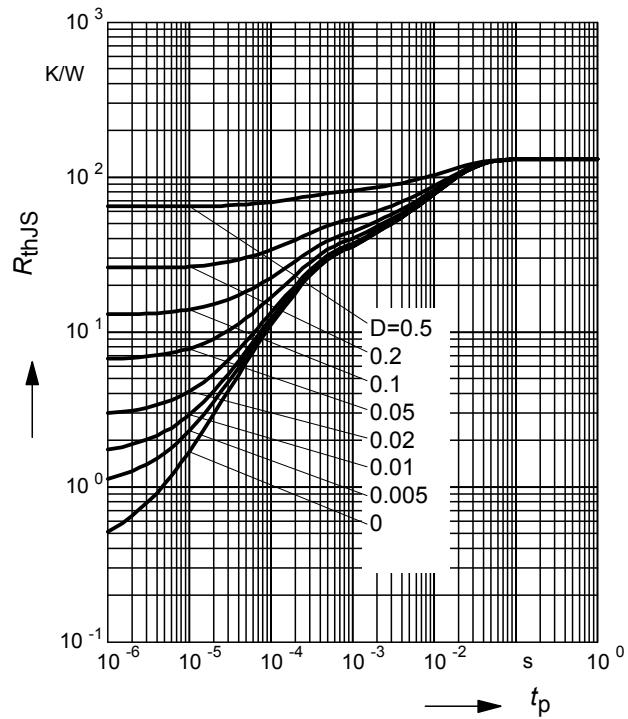
**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR169W

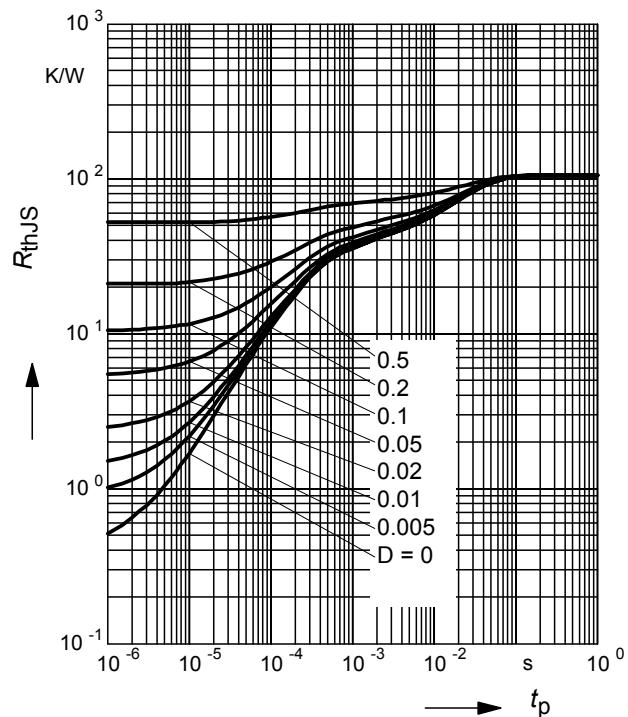

### Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR169W

