



SANYO Semiconductors

**DATA SHEET****LA71578HM**

Monolithic Linear IC

For VHS VCR

**Video Audio Signal Processor  
(Y/C/A/HA SINGLE-CHIP)****Overview**

This LA71578HM is Video Audio Signal Processor for VHS VCR (Y/C/A/HA SINGLE-CHIP).

**Specifications****Maximum Ratings** at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V <sub>CC</sub>	Pins 40, 16, 58, 87, 55, 75	7.0	V
Allowable power dissipation	P <sub>d</sub> max	T <sub>a</sub> ≤65°C *	1400	mW
Operating temperature	T <sub>opg</sub>		-10 to +65	°C
Storage temperature	T <sub>stg</sub>		-40 to +150	°C

\* Mounted on a board : 70×70×1.6mm<sup>3</sup>, paper phenol.

**Recommended Operating Conditions** at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V <sub>CC</sub>	Pins 40, 16, 58, 87, 55, 75	5.0	V
Allowable operating voltage range	V <sub>CC</sub> opg	Pins 40, 16, 58, 87, 55, 75	4.8 to 5.3	V

- Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.
- Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

**SANYO Semiconductor Co., Ltd.**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

# LA71598HM

**Electrical Characteristics** at  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$

## REC Mode Y

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
Current dissipation (REC)	$I_{CCR}$			Measure the sum of currents flowing into pins 40, 16, 58, 87, 75.	175	190	205	mA
EE Output level 1 (SW 1)	$V_{EE1}$	T38A	T29	With $V_{IN}$ a 1Vp-p video signal (PAL), measure the output level on T29.	2.00	2.10	2.20	Vp-p
EE Output level 2 (SW 2)	$V_{EE2}$	T36A	T29	With $V_{IN}$ a 1Vp-p video signal (NTSC), measure the output level on T29.	2.00	2.10	2.20	Vp-p
EE Output level 3 (SW 3)	$V_{EE2}$	T34A	T29	With $V_{IN}$ a 1Vp-p video signal (NTSC), measure the output level on T29.	2.00	2.10	2.20	Vp-p
AGC characteristics 1	AGC1	T38A	T29	With $V_{IN}$ a 2.0Vp-p video signal, measure the ratio of the output level on T29 and $V_{EE1}$ .	0	0.6	1.2	dB
AGC characteristics 2	AGC2	T38A	T29	With $V_{IN}$ a 0.5Vp-p video signal, measure the ratio of the output level on T29 and $V_{EE1}$ .	-1.2	-0.2	0.0	dB
AGC characteristics 3	AGC3	T38A	T29	With $V_{IN}$ a 700mVp-p luminance, 600mVp-p sync, measure the sync level on T29.	550	650	750	mVp-p
AGC characteristics 4	AGC4	T38A	T29	With $V_{IN}$ a 700mVp-p luminance, 150mVp-p sync, measure the sync level on T29.	330	380	430	mVp-p
Sync separator output level	VSYR	T38A	T28	With $V_{IN}$ a 1.0Vp-p video signal, measure the output pulse wave height on T28.	4.0	4.2	4.4	Vp-p
Sync separator output pulse width	PWSYR	T38A	T28	With $V_{IN}$ a 1.0Vp-p video signal, measure the output pulse width on T28.	4.4	4.7	5.0	$\mu\text{s}$
Sync separator threshold level	THSYR	T38A	T28	Gradually reduce the input level, and measure the input level at the point that the output pulse width is $1\mu\text{s}$ sec or more wider than PWSYR.		-20	-15	dB
H-Sync output level	VHSYR	T38A	T27	With $V_{IN}$ a 1.0Vp-p video signal, measure the output pulse wave height on T27.	4.0	4.2	4.4	Vp-p
H-Sync output pulse width	PWHSYR	T38A	T27	With $V_{IN}$ a 1.0Vp-p video signal, measure the output pulse width on T27.		5.0		$\mu\text{s}$
Sync tip level Pedestal level White level	LVOR	T38A	T29	With $V_{IN}$ a 1.0Vp-p video signal, measure the sync tip and pedestal and white level on T29 video output, and take these as LSYN LPED LWHT, respectively.				
Quasi-V insertion level	$\Delta VDR$	T38A	T29	Measure the T29 DC voltage with 4.7V applied to T26, and take this to be LVDR, and compute the difference with LSYN measured above. $\Delta WHR = LSYN - LVDR$		0		mV
Quasi-H insertion level	$\Delta HDR$	T38A	T29	Measure the T29 DC voltage with 3.6V applied to T26, and take this to be LHDR, and compute the difference with LPED measured above. $\Delta HDR = LPED - LHDR$		-100		mV
White insertion level	$\Delta WHR$	T38A	T29	Measure the T29 DC voltage with 2.6V applied to T26, and take this to be LWHR, and compute the difference with LWHT measured above. $\Delta WHR = LWHT - LWHR$	0 1	0		mV
Edge insertion level	$\Delta EGR$	T38A	T29	Measure the T29 DC voltage with 1.5V applied to T26, and take this to be LEGR, and compute the difference with LPED measured above. $\Delta EGR = LPED - LEGR$		-1450		mV
REC YNR operation	RYNR	T38A	T21	$V_{IN}$ =White 50%+CW (31.6mVp-p) Measure the ratio of 32fH component and 32.5fH.	Serial 00: OFF 01: MIN 10: TYP 11: MAX	*		dB
Y LPF frequency characteristics (1)	YLPF1	T38A	T21	With $V_{IN}$ a standard multi-burst signal (1Vp-p), measure the 1MHz response to a 500kHz signal on T21.	-0.6	-0.1	0.4	dB
Y LPF frequency characteristics (2)	YLPF2	T38A	T21	With $V_{IN}$ a standard multi-burst signal (1Vp-p), measure the 2MHz response to a 500kHz signal on T21.	-1.3	-0.3	0.7	dB
Y LPF frequency characteristics (3)	YLPF3	T38A	T21	With $V_{IN}$ a standard multi-burst signal (1Vp-p), measure the 3MHz response to a 500kHz signal on T21.	-4	-2	-0.5	dB

Continued on next page.

# LA71598HM

Continued from preceding page.

Parameter	Symbol	In	Out	Conditions	Ratings			Unit	
					min	typ	max		
Y LPF frequency characteristics (4)	YLPF4	T38A	T21	With $V_{IN}$ a standard multi-burst signal (1Vp-p) measure the 4.43MHz response to a 500kHz signal on T21.			-25	dB	
Y LPF frequency characteristics (5)	YLPF5	T38A	T21	With $V_{IN}$ a standard multi-burst signal (1Vp-p), measure the 3.58MHz response to a 500kHz signal on T21.			-25	dB	
FM modulator output level	VFM		T12	Measure the T12 output level with no input.	Serial 00 01 10 11	270 300 330 360		mVp-p	
Carrier frequency (PAL/MESECAM/SEC AM)	FFM1		T12	Measure the output frequency on T12 with no input.	3.725	3.80	3.875	MHz	
REC-FM output second distortion	HMOD		T12	Measure the second distortion with the above state.		-40	-35	dB	
Deviation (PAL/MESECAM/SEC AM)	DEV1	T38A	T12	With $V_{IN}$ a 100% white 1Vp-p signal, measure the deviation on T12.	0.95	1.00	1.05	MHz	
White peak Frequency	FWP	T38A	T12	With $V_{IN}$ a 100% white 1Vp-p signal, measure the White peak frequency on T12.	4.7	4.8	4.9	MHz	
FM modulator linearity	LMOD	T20	T12	Let f2.85 be the output frequency when 2.85VDC is applied to T20. $LMOD = \frac{f2.85 - (f3.1 + f2.6)/2}{f3.1 - f2.6} \times 100$	-2	0	2	%	
1/2 fH carrier shift	CS		T12	The output frequency change	6.5	8.2	9.5	kHz	
Emphasis gain	GEMP	T20A	T18	With $V_{IN}$ a 500mVp-p 10kHz sine wave, measure the ratio of the levels on T20A and T18.	-0.75	-0.25	0.25	dB	
Detail enhancer Characteristics (1)	GENH1	T20A	T18	With $V_{IN}$ a 158mVp-p 2MHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP.	Serial 000: MIN ↑↓ 100: TYP ↑↓ 111: MAX	1.0	1.5	2.0	dB
Detail enhancer Characteristics (2)	GENH2	T20A	T18	With $V_{IN}$ a 50mVp-p 2MHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP.	Serial 000: MIN ↑↓ 100: TYP ↑↓ 111: MAX	3.0	4.0	5.0	dB
Detail enhancer Characteristics (3)	GENH3	T20A	T18	With $V_{IN}$ a 15.8mVp-p 2MHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP.	Serial 000: MIN ↑↓ 100: TYP ↑↓ 111: MAX	4.3	5.8	7.3	dB
Nonlinear emphasis Characteristics (1)	GNLEMP1	T20A	T18	With $V_{IN}$ a 500mVp-p 2MHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP. (Y-TEST)	Serial 01: MAX 10: TYP 11: MIN		0.5		dB
Nonlinear emphasis Characteristics (2)	GNLEMP2	T20A	T18	With $V_{IN}$ a 158mVp-p 2MHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP. (Y-TEST)	Serial 01: MAX 10: TYP 11: MIN		4		dB
Nonlinear emphasis Characteristics (3)	GNLEMP3	T20A	T18	With $V_{IN}$ a 50mVp-p 2MHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP. (Y-TEST)	Serial 01: MAX 10: TYP 11: MIN		6		dB

Continued on next page.

# LA71598HM

Continued from preceding page.

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
Main linear emphasis Characteristics (1)	GME1	T20A	T18	With $V_{IN}$ a 50mVp-p 500kHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP. (Y-TEST)		11.0		dB
Main linear emphasis Characteristics (2)	GME2	T20A	T18	With $V_{IN}$ a 50mVp-p 2MHz sine wave, measure the ratio of the levels on T20A and T18, and take the difference with GEMP. (Y-TEST)	13.1	13.6	14.1	dB
White clipping level	LWC	T38A	T18	With $V_{IN}$ a 1.0Vp-p 100% white video signal, measure the white clipping level on T18. (Y-TEST)	Serial 0 1		185 195	%
Dark clipping level	LDC	T38A	T18	With $V_{IN}$ a 1.0Vp-p 100% white video signal, measure the dark clipping level on T18. (Y-TEST)	Serial 0 1		-52 -57.5	%

## PB Mode Y

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
Current dissipation (PB)	I <sub>CCP</sub>			Measure the sum of currents flowing into pins 40, 16, 58, 87, 75.	185	200	215	mA
Dropout compensation Period *1H for one horizontal synchronization period	TDOC	T74 T20A	T29	T74: 4MHz 300mVp-p sine wave T20A: 0.5Vp-p video signal The time between the instant the T74A input set to and the point T29 output is restored.	10.5	12.5	14.5	H
DOC characteristics	GDOC	T74 T20A	T29	T74: 4MHz 300mVp-p sine wave T20A: 0.5Vp-p video signal The I/O response 5H after the T74A input is set to 0.	-1.5	0	1.5	dB
PB Y level	V-YOUT	T74	T29	DEV = 1.0MHz PB Y level when input FM signal.	2.00	2.10	2.20	Vp-p
Over all Y level	R/P-OUT	T74	T29	R/P-Y level, PB-Y level	1.93	2.10	2.27	Vp-p
FM demodulator linearity	LDEM	T74	T21	$LDEM = \frac{VDEM4 - (VDEM3 + VDEM5)/2}{VDEM5 - VDEM3} \times 100$ *VDEM4 = DC: T21 (Input 4MHz, 300mVp-p)	-3.5	0	+3.5	%
Carrier leakage	CL	T74	T21	Measure the ratio of the 4MHz component on T21 and SDEM.			-35	dB
PB YNR characteristics	PYNR	T20A	T29	Measure the ratio of the 32fH component and 32.5fH.	Serial 00 (OFF) 01 (STD) 10 (MID) 11 (STG)		0 -3.2 -8.2 -11.8	dB
DOC level	LDOC	T74	T29	Measure the level of D.O.C when 300mVp-p is set to 0dB with $V_{IN}$ = 4MHz.			-16	dB
DOC stop level	LDOS	T74	T29	Measure the level when D.O.C stops when the $V_{IN}$ = 4MHz signal is entered.			100	mVp-p
Nonlinear de-emphasis characteristics (1)	GNLDE1	T20A	T29	With $V_{IN}$ a 50% white video +2MHz 158mVp-p sine wave, measure the I/O response. (Y-TEST)	Serial 01: MAX 10: TYP 11: MIN		-3.5 -2.5 -1.5	dB
Nonlinear de-emphasis characteristics (2)	GNLDE2	T20A	T29	f = 2MHz, 50mVp-p (Y-TEST)	Serial 01: MAX 10: TYP 11: MIN		-6.0 -4.5 -3.0	dB
Double noisecanceller characteristics (1)	GWNC1	T20A	T29	f = 1.4MHz, 158mVp-p	Serial 000: MIN 100: TYP 111: MAX		-3.5 -2.5 -1.5	dB
Double noisecanceller characteristics (2)	GWNC2	T20A	T29	f = 1.4MHz, 50mVp-p	Serial 000: MIN 100: TYP 111: MAX		-12 -10 -8	dB

Continued on next page.

# LA71598HM

Continued from preceding page.

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
Double noisecanceller characteristics (3)	GWNC3	T20A	T29	f = 1.4MHz, 15.8mVp-p	Serial 000: MIN 100: TYP 111: MAX	-15	-13	-11 dB
PIC-CTL Hard MAX	GPH1	T20A	T29	f = 2.5MHz, 158mVp-p			6.0	7.0 dB
PIC-CTL Soft MAX	GPSF	T20A	T29	f = 2.5MHz, 158mVp-p			-8.8	-6.8 dB
Sync separator output level	VSYF	T20A	T28	With V <sub>IN</sub> a 0.5Vp-p video signal, measure the output pulse wave height on T28.			4.0	4.2 Vp-p
Sync separator output pulse width	PWSYF	T20A	T28	With V <sub>IN</sub> a 0.5Vp-p video signal, measure the output pulse width on T28.			4.35	4.65 μs
H-Sync output level	VHSYF	T20A	T27	With V <sub>IN</sub> a 0.5Vp-p video signal, measure the output pulse wave height on T27.			4.0	4.2 Vp-p
H-Sync output pulse width	PWHSYF	T20A	T27	With V <sub>IN</sub> a 0.5Vp-p video signal, measure the output pulse width on T27.			5.0	μs
Sync tip level Pedestal level white level	LVOR	T20A	T29	With V <sub>IN</sub> a 100% white 0.5Vp-p signal, measure the sync tip and pedestal and white levels on T29 video output, and take these as LSYN LPED LWHT, respectively.				
Quasi-V insertion level	ΔVDP	T20A	T29	Measure the T29 DC voltage with 4.7V applied to T26, and take this to be LVDP, and compute the difference with LSYN measured above. ΔVDP = LSYN-LVDP			0	mV
Quasi-H insertion level	ΔHDP	T20A	T29	Measure the T29 DC voltage with 3.6V applied to T26, and take this to be LHDP, and compute the difference with LPED measured above. ΔHDP = LPED-LHDP	Serial 0 1		-100	mV
White insertion level	ΔWHP	T20A	T29	Measure the T29 DC voltage with 2.6V applied to T26, and take this to be LWHP, and compute the difference with LWHT measured ΔWHP = LWHT-LWHP	Serial 0 1		-1450	mV
Edge insertion level	ΔEGP	T20A	T29	Measure the T29 DC voltage with 1.5V applied to T26, and take this to be LEGP, and compute the difference with LPED measured ΔWHP = LPED-LEGP	Serial 0 1		-100	mV
4V regulator	VREG		T39	Measure the T39 DC level.		3.9	4.1	4.3 V

## REC Mode EQ

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
REC EQ characteristics 1	GREQ1	T17A	T12	With V <sub>IN</sub> a CW 2MHz, 300mVp-p signal, measure the input/output response.	-5.5	-4.5	-3.5	dB
REC EQ characteristics 2	GREQ2	T17A	T12	With V <sub>IN</sub> a CW 4MHz, 300mVp-p signal, measure the input/output response, and take the difference with GREQ1.	-3.7	-2.7	-1.7	dB
REC EQ 2'nd distortion	HREQ	T17A	T12	Measure the second harmonic in the above conditions.			-40	-35 dB
REC EQ characteristics 3	GREQ3	T17A	T12	With V <sub>IN</sub> a CW 750kHz, 400mVp-p signal, measure the input/output response.			-20	dB

# LA71598HM

## PB Mode EQ

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
PB EQ characteristics 1 *Serial-control	GPEQ1	T74	T18	With $V_{IN}$ a CW 4MHz 300mVp-p signal, measure the input/output response.	1.5	3.0	4.5	dB
PB EQ 2'nd distortion	HPEQ	T74	T18	Measure the second harmonic in the above condition.		-40	-30	dB
PB EQ Low-Trap characteristics 1 *Serial control	FPEQ1	T74	T18	$V_{IN} = 300\text{mVp-p}$ Measure the Low-band Trap frequency and gain. (Using network analyzer)	Serial 00 (650k) 01 (800k) 10 (1.1M) 11 (500k)		-25 -25 -25 -25	dB
PB EQ High-Trap characteristics 2 *Serial control	FPEQ2	T74	T18	$V_{IN} = 300\text{mVp-p}$ Measure the High-band Trap frequency and gain. (Using network analyzer)	Serial 00 (10M) 01 ( 9M) 10 ( 8M) 11 ( 7M)		-25 -25 -25 -25	dB

## PB Mode Chroma

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
PB chroma video output level PAL MODE	PVop-29	T74A T20A	T29	Input a chroma signal that is a lower frequency converted chroma noise test signal (SP mode, burst 50mVp-p) to T74A. Input a 4MHz 300mVp-p sine wave to T74A, and a 50% white signal to T20A. Measure the burst level on T29.	490	580	670	mVp-p
PB chroma pin 72 output level	Vop-72	T74A T20A	T72	Measure the burst level with the same conditions as those for PVop-72.		280		mVp-p
PB ACC characteristics (1)	ACCP1	T74A T20A	T72	With the conditions used for PVop-29, increase the input chroma level by +6dB, measure the burst level on T72, and calculate the ratio with Vop-72.		+0.5	+0.8	dB
PB ACC characteristics (2)	ACCP2	T74A T20A	T72	With the conditions used for PVop-29, decrease the input chroma level by -6dB, measure the burst level on T72, and calculate the ratio with Vop-13.	-0.5	-0.2		dB
PB killer-on input level	VACK-P	T74A T20A	T72	With the conditions used for Vop-29, the input chroma level until output from T72 cease and measure the input burst level at that point. (Calculate the ratio with the standard input 50mVp-p signal)			-25	dB
PB killer-on chroma output level	VOACK-P	T74A T20A	T29	Measure the T29 chroma output with a spectrum analyzer in the killer state of the previous item. Calculate its ratio with PVop-29.		-44	-40	dB
PB main converter carrier leakage	CLP	T74A T20A	T29	With the conditions used for PVop-29, measure the T29 with a spectrum analyzer, and calculate the ratio of the 4.43MHz component and the 5.06MHz carrier leakage component.		-40	-33	dB
PB XO output level PAL MODE	VXO-PP		T69A	In PB mode, measure the output level on T69 with an FET probe.	300	500	700	mVp-p
PB XO oscillator frequency deviation PAL MODE	$\Delta f_{XOP}$		T69A	In PB mode, let $f$ be the measured frequency on T69. $\Delta f_{XOP} = f - 4433619$ (Hz)	-9	0	+9	Hz
NTSC → PAL conversion V axis Burst level	VBNAP	T1A T10A	T27	Input a chroma signal that is a lower frequency converted chroma noise test signal (SP mode, burst 100mVp-p) to T1A. Input a 4MHz 300mVp-p sine wave to T1A, and a 50% white signal to T10A. Measure the T27-45° Burst level, and take the ratio with the PVOP-27.	-2	-1	0	dB

Continued on next page.

# LA71598HM

Continued from preceding page.

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
NTSC → PAL conversion Ratio of the Burst level	ΔB-NAP	T1A T10A	T27	With the same condition above, measure the Burst level, and take the ratio with VBNAP.	-2	0	2	dB
PB Chroma 2nd harmonic distortion	PTHD2	T1A T10A	T27	With the conditions used for PVOP-27, measure the T27 with a spectrum analyzer, and calculate the ratio of the 4.43MHz component and the 8.86MHz component.			-25	dB

## REC Mode Chroma

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
REC chroma low frequency conversion output level	VOR-72	T38A	T72	With $V_{IN}$ the standard color bar signal (1Vp-p), measure the burst level on T72. Serial 00 01 10 11		225 190 160 135		mVp-p
VXO oscillation level PAL GBI	VVXO-RP	T38A	T69A	With $V_{IN}$ the standard color bar signal (1Vp-p), measure the T69A output amplitude with an FET probe.	300	500	700	mVp-p
REC ACC Characteristics (1)	ACCR1	T38A	T72	With $V_{IN}$ the standard color bar signal (1Vp-p), increase only the chroma signal level by +6dB, measure the T72 burst level, and calculate its ratio with VOR-2.		+0.2	+0.5	dB
REC ACC characteristics (2)	ACCR2	T38A	T72	With $V_{IN}$ the standard color bar signal (1Vp-p), decrease only the chroma signal level by -6dB, measure the T72 burst level, and calculate its ratio with VOR-2.	-0.5	-0.1		dB
REC ACC killer-on input level	VACCK-ON	T38A	T72	With $V_{IN}$ the standard color bar signal (1Vp-p), decrease the chroma signal and measure the input burst level at the point that T72 output ceases. Calculate the ratio of this value with the standard input level.		-26		dB
REC ACC killer-on output level	VOACCK	T38A	T72	Measure the T72 output level with a spectrum analyzer in the killer state of the above item and calculate its ratio with VOR-2.		-60	-50	dB
REC ACC killer restored input level	VACCK-OFF	T38A	T72	From the killer state of the above item gradually increase the input chroma level and T72 output reappears. Calculate its ratio with the standard input level.		-20		dB
REC APC pull-in range (1) PAL MODE	ΔfAPC1	T38A	T72	Input a signal consisting of a 4.4336MHz CW added to a 50% white signal. After confirming that a signal is output from T72, increase the CW frequency until T72 output ceases. Now slowly reduce the CW frequency, and let f1 be the frequency at which T72 output reappears. $\Delta fAPC1 = f1 - 4433619$ (Hz)	300			Hz
REC APC pull-in range (2) PAL MODE	ΔfAPC2	T38A	T72	As in the previous item, decrease the CW frequency until T72 output ceases. Now, slowly increase the CW frequency and let f2 be the frequency at which T72 output reappears. $\Delta fAPC2 = f2 - 4433619$ (Hz)			-300	Hz
REC AFC pull-in range (1)	ΔfAFC1	T38A	T62	Input a 300mVp-p, 15.6kHz, 5μs width pulse train (negative polarity). After increasing the pulse train frequency until the T62 wave form is disrupted, decrease the frequency until the T62 wave form returns to normal and let f1 be that frequency. $\Delta fAFC1 = f1 - 15.625$ (kHz)	1.0			kHz

Continued on next page.

# LA71598HM

Continued from preceding page.

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
REC AFC pull-in range (2)	$\Delta fAFC2$	T38A	T62	With the initial conditions of the previous item, decrease the pulse train frequency until the output is disrupted, then increase the frequency until the output returns to normal, and let f2 be that frequency. $\Delta fAFC2 = f2 - 15.625$ (kHz)		-2.5	-1.0	kHz
The ratio of the REC chroma level and FM modulator output level 1 PAL MODE	C/FM1	T38A	T72 T12	The ratio of 100% chroma's level which was converted to low band and FM modulator output level.  *Serial Gr6: ---- --00,Gr7: ---- --00	-3.7	-3.0	-2.3	dB
PILOT BURST Amplitude	LPB	T38A	T72	The amplitude of pilot burst which was inserted in recording.		100		mVp-p
PILOT BURST Phase	PPB	T38A	T72	The phase of pilot burst which was inserted in recording.		270		deg
NEM AFC pull-in range(1)	$\Delta fNAFC1$	T38A	T35	Input a 300mVp-p,15.6kHz,5μs width pulse train (negative polarity).  After increasing the pulse train frequency until the T35 wave form is disrupted, decrease the frequency until the T35 wave form returns to normal and let f1 be that frequency. $\Delta fAFC1 = f1 - 15.625$ (kHz)	1.0			kHz
NEW AFC pull-in range (2)	$\Delta fNAFC2$	T38A	T35	With the initial conditions of the previous item, Decrease the pulse train frequency until the output is disrupted, then increase the frequency until the output returns to normal, and let f2 be that frequency. $\Delta fAFC2 = f2 - 15.625$ (kHz)		-2.5	-1.0	kHz
Output level of 2fsc	L2FSC		T56	To measure the amplitude of pin56 with no signal at pin38 in recording	200	300		mVp-p
Harmonics of 2fsc	HFSC2		T56	At first to measure the fsc component of pin56. At last, to compare the ratio between fsc and 2fsc component with no signal at pin38 in recording	-10	-15		dB
Harmonics of 2fsc	HFSC3		T56	At first to measure the 3fsc component of pin56. At last, to compare the ratio between 3fsc and 2fsc component with no signal at pin38 in recording	-10	-15		dB

# LA71598HM

## Head Amplifier

Parameter	Symbol	In	Out	Conditions			Ratings			Unit
							min	typ	max	
PB mode				T87: 5.0V T30: OPEN	T11A RF	T11B HA				
Current dissipation	IHCCP			Pin 87 inflow current	0	0		39		mA
Voltage gain SP-L CH1 SP-H CH2 EP-L CH3 EP-H CH4	Gvp1 Gvp2 Gvp3 Gvp4	T91A T88A T85A T82A	T74	$V_{IN} = 0.4mVp-p$ $F = 4MHz$	0 5.0 0 5.0	0 0 5.0 5.0	58	60.0 60.0 60.0 60.0	62	dB
Difference of voltage gain 1	$\Delta Gvp1$			Gvp1-Gvp2			-1	0	+1	dB
Difference of voltage gain 2	$\Delta Gvp2$			Gvp3-Gvp4			-1	0	+1	dB
Difference of gain between mode	$\Delta Gvp3$			Gvp3-Gvp1			-1	0	+1	dB
Frequency Characteristics	CH1 CH2 CH3 CH4	$\Delta Vfp1$ $\Delta Vfp2$ $\Delta Vfp3$ $\Delta Vfp4$	T91A T88A T85A T82A	T74	$V_{IN} = 38mVp-p$ The ratio of the $V_{IN} = 38mVp-p$ , $f = 7MHz$ output and Gvp1, 2, 3, 4.	0 5.0 0 5.0	0 0 5.0 5.0	-1 0	+1	dB
Secondary harmonic distortion	CH1 CH2 CH3 CH4	VHDP1 VHDP2 VHDP3 VHDP4	T91A T88A T85A T82A	T74	$V_{IN} = 38mVp-p$ The ratio of 8MHz (second component) of $f = 4MHz$ output and 4MHz (first component).	0 5.0 0 5.0	0 0 5.0 5.0		-40	dB
Maximum output level	CH1 CH2 CH3 CH4	VOMP1 VOMP2 VOMP3 VOMP4	T82A T85A T88A T91A	T74	As $f = 1MHz$ , the output level of which become -30dB as the ratio of output 3MHz (third component) and 1MHz (first component).	0 5.0 0 5.0	0 0 5.0 5.0	1.0 1.2		Vp-p
Cross talk SP1 CH1	VCR1	T82A T85A T88A	T74	The ratio of output of $V_{IN} = 38mVp-p$ , $f = 4MHz$ and Gvp1.	0	0			-35	dB
Cross talk SP2 CH2	VCR2	T82A T85A T91A	T74	The ratio of output of $V_{IN} = 38mVp-p$ , $f = 4MHz$ and Gvp2.	5.0	0			-35	dB
Cross talk EP1 CH3	VCR3	T82A T88A T91A	T74	The ratio of output of $V_{IN} = 38mVp-p$ , $f = 4MHz$ and Gvp3.	0	5.0			-35	dB
Cross talk EP2 CH4	VCR4	T85A T88A T91A	T74	The ratio of output of $V_{IN} = 38mVp-p$ , $f = 4MHz$ and Gvp4.	5.0	5.0			-35	dB
Equivalent input noise voltage			T74	90 connected to 91 88 89 84 85 82 83	0 5 0 5	0 0 5 5		0.6 0.2	hV/ $\sqrt{Hz}$	
Equivalent input current noise			T74	90, 91 open 88, 89 84, 85 82, 83	0 5 0 5	0 0 5 5		1.7 2.0	pA/ $\sqrt{Hz}$	

Continued on next page.

# LA71598HM

Continued from preceding page.

Parameter	Symbol	In	Out	Conditions			Ratings			Unit
							min	typ	max	
Output DC off set	$\Delta V_{ODC1}$		T74	CH1-		0	0			mV
	$\Delta V_{ODC2}$			CH2	5.0	0				
	$\Delta V_{ODC3}$			CH3-	0	5.0				
	$\Delta V_{ODC4}$			CH4	5.0	5.0				
	$\Delta V_{ODC5}$			CH1-	0	0				
	$\Delta V_{ODC6}$			CH3	0	5.0				
Envelope detection output terminal voltage	VENV		T93	T93 DC when no input.	0	0		0.8	1.0	V
Envelope detection output terminal voltage SP1	VENV1	T91A	T93	When input f = 4MHz, T93 100mVp-p, DC diff to venv, for T74 output level.	0.0	0.0	2.0	2.5	3.0	V
Envelope detection output terminal voltage SP2	VENV4	T91A	T93	When input f = 4MHz, T93 400mVp-p, for T74 output level.	0.0	5.0	4.0	4.5	5.0	V
Envelope detection output terminal voltage EP1	VENV6	T85A	T93	When input f = 4MHz, T93 600mVp-p, for T74 output level.	5.0	0.0	2.0	2.5	3.0	V
Envelope detection output terminal voltage EP2	VENV7	T85A	T93	When input f = 4MHz, T93 750mVp-p DC dif to venv.	5.0	5.0	3.5	4.0	4.5	V
Comparator output voltage 1	VCOMP1	T91A	T94	T94 DC voltage when $V_{IN} = 38mVp-p$ , $f = 4MHz$ .	0	0		0.4	0.7	V
Comparator output voltage 2	VCOMP2	T85A	T94	T94DC voltage when $V_{IN} = 38mVp-p$ , $f = 4MHz$ .	5.0	0	4.5	4.8		V

Continued on next page.

For operating the RF-SW and HA-SW, it's necessary to input the video signal to T20A.

And also confirm the output signal of T28.

# LA71598HM

Continued from preceding page.

Parameter	Symbol	In	Out	Conditions		Ratings			Unit
						min	typ	max	
Recording mode				T87: 5.0V T30: 5.0V	T11B HA				
Current dissipation	IHCCR			Pin 87 inflow current.	0		48		mA
REC AGC Amp output current	VRSP VREP	T12A	T89A T83A	Output level when $V_{IN} = 300mVp-p$ , $f = 4MHz$	0 5.0	12.7	13.5	14.3	mAp-p
REC AGC AMP control characteristics 1	$\Delta VAGC1-SP$ $\Delta VAGC1-EP$	T12A	T89A T83A	As $f = 4MHz$ , the output level/VRSP, EP When $V_{IN} = 700mVp-p$ .	0 5.0		0.5		dB
REC AGC AMP control characteristics 2	$\Delta VAGC2-SP$ $\Delta VAGC2-EP$	T12A	T89A T83A	As $f = 4MHz$ , the output Level/VRSP, EP when $V_{IN} = 100mVp-p$ .	5.0		-0.5		dB
REC AGC AMP Frequency characteristics	$\Delta VFRE$ $\Delta VFRE$	T12A	T89A T83A	As $V_{IN} = 300mVp-p$ , the output ratio when $f$ is 1M, 7MHz 7MHz/1MHz (Note 1)	0 5.0		0.0		dB
REC AGC AMP second harmonic distortion	$\Delta VHDRS$ $\Delta VHDRE$	T12A	T89A T83A	15mAp-p/ each head The ratio of the 8M (second component) $V_{IN} = 300mVp-p$ , $f = 4MHz$ output and 4M (first component).	0 5.0		-40	-36	dB
REC AGC AMP maximum output level	$\Delta VHDRS$ $\Delta VHDRE$	T12A	T89A T83A	The output level which become -35dB of $f = 4MHz$ second distortion.	0 5.0		2.0		mAp-p
REC AGC AMP attenuate volume of mute	$\Delta VMRS$ $\Delta VMRE$	T12A	T89A T83A	Output level/VRSP, EP When $V_{IN} = 300mVp-p$ , $f = 4MHz$ via pin 30	0 5.0		-45		dB
REC AGC AMP Mixed modulation relative level	$\Delta VCYS$ $\Delta VCYE$	T12A, T71A	T89A T83A	T12A: $V_{IN} = 300mVp-p$ , $f = 4MHz$ , T71A: $V_{IN} = 1.5Vp-p$ , $f = 629kHz$ (4M±629K)/4M ratio of output	0 5.0		-40		dB

Similarly to the case of the PB mode, HA-SW (EP/SP) changeover is synchronized to rise of H-SYNC in the REC mode.  
Before changeover,

Check by applying the video signal (1Vp-p) to T38A if H-SYNC is correctly output to T28.

(Note1) Apply about 1.8 DC volt to the AGC detection filter pin (pin92) to fix AGC-AMP-GAIN

Note 1. To measure REC-AGC-AMP, C-sync must be fixed to HIGH. Connect T38A, T36A, and T34A of the VIDEO input pin to ground in the REC mode

2. Use a resistor of pin 74 to ground with the accuracy of ±1.0%

For to operat the HA-SW, it's necessary to input the video signal to T20A.

And also confirm the output signal of T28.

## [PAL/SECAM Discrimination]

As for this IC, PAL/SECAM discrimination operates as below.

- (1) On REC/EE mode, take Hi output when input PAL-GBI signal and Lo output when input SECAM or MESECAM signal. On PB mode, takes Hi output when input PAL-GBI signal, Lo output when input MESECAM signal, and becomes unstable when input SECAM signal. But MESECAM signal when playback both LP and TRICK it takes unstable. And takes unstable all of REC/EE/PB when input PAL-M or PAL-M signal.
- (2) On NAP mode in PB, takes Hi output, and not depend on the kind of input signal.
- (3) In case of non-signal of input, takes high output except for on LP mode when Trick mode.
- (4) On REC/EE mode, takes Hi output when there are no burst or when takes smaller burst than the SPEC which shows below except for the case of above (3).
- (5) On PB mode, takes unstable output when it has smaller burst than the SPEC which shows below except for the case of above (2), (3).
- (6) It is possible to adjust small discrimination characteristics at T73. The side of high output becomes strong in case of increase T73 voltage. T73 has high sensitivity, so that we recommend to add voltage to take regulator voltage as base which receive no influence of VCC changings.
- (7) T69 has high impedance, so that to set leak current lower than a few nA on P board. Insert operation Amp when monitor T69.
- (8) We dare to not recommend to PAL/SECAM discriminate to take as base for T70 voltage because of voltage get to unstable at PB MESECAM signal.

# LA71598HM

## REC Mode P/S Discrimination

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
P/S discrimination minimum output level	VPSSR1	T38A	T24	Non mis-discrimination chroma burst or non-modulation carrier level when getting smaller chroma burst or non-modulation carrier of signal to input T38A. Input sync level is 300mVp-p.	10	21	29.5	mVp-p
P/S discrimination burst position	TBST	T38A	T24	Change the position of chroma burst or non-modulation carrier which is a signal input to T38A and regulate the range of non mis-discrimination as from T38A sync beginning to chroma burst or beginning of non-modulation carrier. Input sync level is 300mVp-p.	5.1	5.6	6.1	μs

## PB Mode P/S Discrimination

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
R/P discrimination input level	VPSPI	T74A T20A	T24	T74A: A signal which confirmed 4MHz,300mVp-p sine wave to low band converted chroma signal. T20A: 50% white signal. Non mis-discrimination low chroma burst or non-modulation carrier level when changing the size of T74A low chroma burst or non-modulation carrier.	25	50	100	mVp-p

## In Common REC/PB P/S Discrimination

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
Discrimination small adjustment center value	VPSREF		T73	The voltage of the T73.	2.3	2.5	2.7	V
P/S discrimination comparator threshold voltage when L → H	VPSLH	T69	T24	Increasing voltage the T69 from 2V, measure the T69 voltage when results of discrimination is Low.	2.81	3.01	3.21	V
P/S discrimination comparator threshold voltage when H → L	VPSHL	T69	T24	Decreasing voltage the T69 from 4V, measure the T69 voltage when results of discrimination is High.	2.51	2.71	2.91	V

# LA71598HM

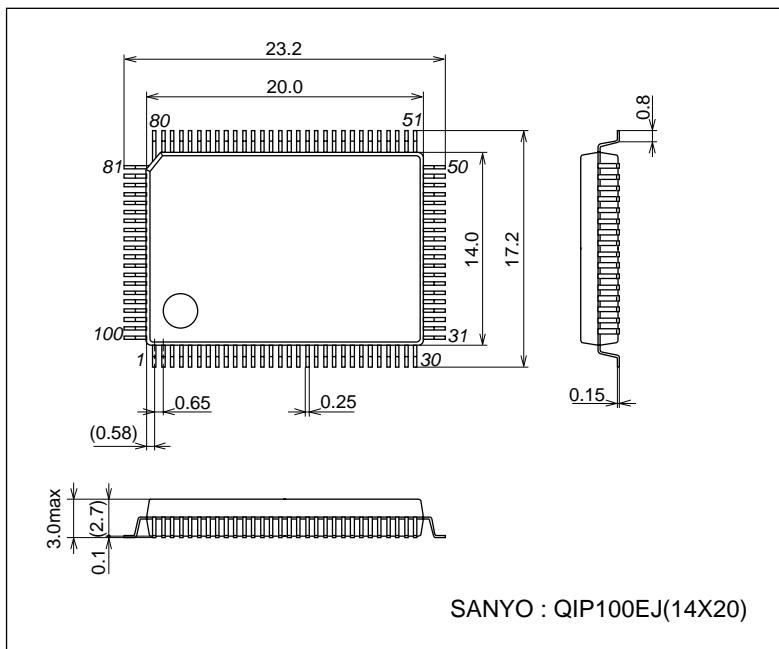
## REC/PB Mode Audio at V<sub>CC</sub> = 7.5V

Parameter	Symbol	In	Out	Conditions	Ratings			Unit
					min	typ	max	
LINE AMP voltage gain (PB)	VGLP	T100A	T96A	V <sub>IN</sub> = -30dBv	23.0	23.5	24.0	dB
LINE AMP voltage gain (A1, A2, A3)	VGLR1 VGLR2 VGLR3	T76A T78A T80A	T96A	V <sub>IN</sub> = -30dBv	23.0	23.5	24.0	dB
LINE AMP distortion ratio (PB)	THDL	T100A	T96A	V <sub>IN</sub> = -30dBv	0.01	0.1	0.4	%
LINE AMP output noise voltage (PB)	VNOL		T96A	Rg = 1kΩ, DIN Audio filter (Unweighted)	100	200	300	µVRms
LINE AMP maximum output voltage (PB)	V <sub>O</sub> ML	T100A	T96A	THD = 1%	1.8	2.1	2.4	VRms
LINE AMP output level when ALC	V <sub>O</sub> A	T76A	T96A	V <sub>IN</sub> = -28dBv	-7.0	-6.0	-5.0	dBv
LINE AMP ALC effect	ALC	T76A	T96A	V <sub>IN</sub> = -28dBv to -8dBv	0.0	1.0	3.0	dB
LINE AMP distortion ratio of when ALC	THDA	T76A	T96A	V <sub>IN</sub> = -28dBv	0.01	0.1	0.5	%
MUTE attenuation level (PB, A1, A2, A3)	MPB MA1 MA2 MA3	T100A T76A T78A T80A	T96A	V <sub>IN</sub> = -10dBv, MUTE-ON	80	90	120	dB
EQ AMP open loop voltage gain	VGOE	T4A	T1A	V <sub>IN</sub> = -66dBv	58	64	70	dB
EQ AMP input conversion noise voltage	VNIE		T1A	Rg = 620Ω, DIN Audio filter (Unweighted)	0.1	0.8	1.8	µVRms
REC AMP voltage gain (SP)	VGRS	T98A	T7A	V <sub>IN</sub> = -20dBv	13.5	14.0	14.5	dB
REC AMP voltage gain (LP)	VGRL	T98A	T7A	V <sub>IN</sub> = -20dBv	13.5	14.0	14.5	dB
REC AMP distortion Ratio (LP)	THDRL	T98A	T7A	V <sub>IN</sub> = -20dBv	0.001	0.1	0.4	%
REC AMP distortion ratio (SP)	THDRS	T98A	T7A	V <sub>IN</sub> = -20dBv	0.001	0.1	0.4	%
REC AMP maximum output Voltage (SP)	VOMRS	T98A	T7A	THD = 1%	1.8	2.1	2.4	VRms
Current dissipation (REC)	I <sub>CCRA</sub>			Measure the current flowing into pin 75 (No signal)	10.8	13.5	16.2	mA
Current dissipation (PB)	I <sub>CCPA</sub>			Measure the current flowing into pin 75 (No signal)	10.8	13.5	16.2	mA
DC offset voltage of MUTE-ON (PB)	MTDCO		T96	Measure the DC offset voltage on pin 96, when operating MUTE-ON (No signal)	0	30	50	mV
ALC detector input voltage	VIA	T78A	T97	V <sub>IN</sub> = -28dBv	198	220	242	mVRms
PB attenuation level 19	PBATT19	T100A	T96A	V <sub>IN</sub> = -30dBv, Group 8 = XX11-0010	-6.5	-6.0	-5.5	dB
PB attenuation level 28	PBATT28	T100A	T96A	V <sub>IN</sub> = -30dBv, Group 8 = XX11-1011	-12.5	-12.0	-11.5	dB

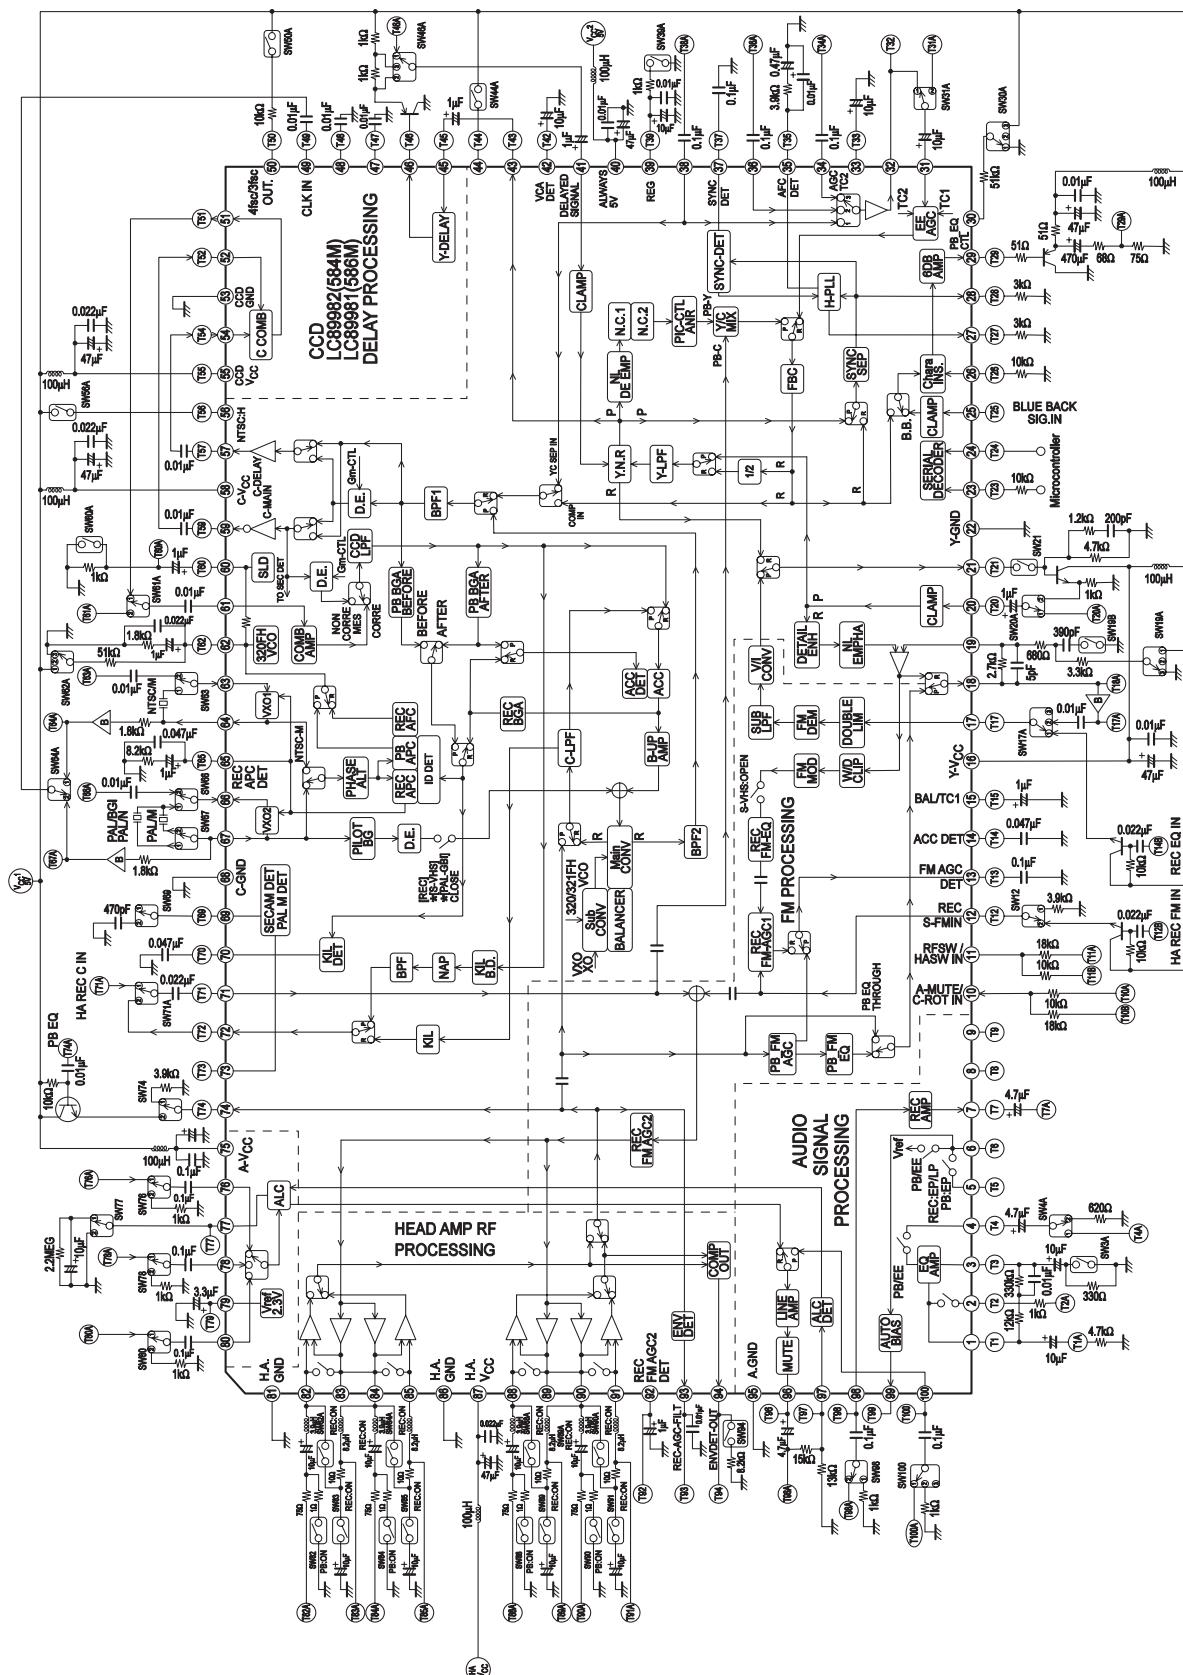
**Package Dimensions**

unit : mm (typ)

3252A



## Block Diagram and Test Circuits



# LA71598HM

## Pin Functions

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
1	EQ-OUT	REC: A-V <sub>CC</sub> /2		
		PB: A-V <sub>CC</sub> /2	CW: 95mVp-p	
2	EQ-SW2	REC: A-V <sub>CC</sub> /2		
		PB: A-V <sub>CC</sub> /2	CW: 95mVp-p	
3	EQ-NFB	REC: A-V <sub>CC</sub> /2		
		PB: A-V <sub>CC</sub> /2	CW: 1mVp-p	
4	EQ-IN	REC: A-V <sub>CC</sub> /2		
		PB: A-V <sub>CC</sub> /2	CW: 1mVp-p	
5	EQ-SW1	REC: A-V <sub>CC</sub> /2. +70kHz: 850mVp-p	CW: 1.4Vp-p +70kHz: 850mVp-p	
		PB: A-V <sub>CC</sub> /2	SP/LP: IMAGINATION GND EP: CW: 1mVp-p	
6	AUTO-BIAS-IN	REC: A-V <sub>CC</sub> /2	CW: 1.4Vp-p +70kHz: 850mVp-p	
		PB: A-V <sub>CC</sub> /2	IMAGINATION GND	
7	AUDIO-REC-OUT	REC: A-V <sub>CC</sub> /2	CW: 1.4Vp-p	
		PB: A-V <sub>CC</sub> /2		
8	AUDIO REC-NFB-SP	REC: A-V <sub>CC</sub> /2	CW: 280mVp-p	
	AUDIO REC-NFB-LP, EP	PB: A-V <sub>CC</sub> /2		

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
10	MUTE C-ROT		<p>DC level</p> <p>C-ROT L → 0° (PAL) H → 90°/H</p>	
11	RF-SW HA-SW		<p>HA-SW</p> <p>RF-SW</p> <p>Hch</p> <p>Lch</p> <p>2.2V</p> <p>Hch</p> <p>Lch</p>	
12	PORECEQ	REC: 2.0V PB: 4.2V	FM: 350mVp-p	
13	FM-AGC-FILT	REC: 1.5V PB: 1.5V		
14	ACC-FILT	REC: 1.7V PB: 1.5V	DC	

Continued on next page.

# LA71598HM











Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
15	REC-AGC-TC1	REC: 2.2V	DC	
	PB BALANCER	PB: 2.2V	DC	
16	Y-V <sub>CC</sub> -5V	5V	DC	
17	PB-FM-IN2	REC: 0.05V		
	PB: 3V	PB-Y-FM		
18	EMPHASIS-OUT	REC: 2.1V		
	PB: 1.8V			
19	MAIN-EMPHAFILT	REC: 2.1V		
	PB: 2.1V			

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
20	CLAMP-IN	REC: 2.8V PB: 2.8V	 <b>500mVp-p</b> <b>2.8V</b>	
21	MAIN-DEEMPH-OUT	REC: 2.1V PB: 2.1V	 <b>500mVp-p</b> <b>2.1V</b>	
22	Y-GND			
23	SERIAL DATA-IN	REC: PB:	 <b>2.3V</b> -> <b>5V</b> <b>2.0V</b> <b>0V</b>	
24	SERIAL CLOCK-IN	REC: PB:	 <b>2.3V</b> -> <b>5V</b> <b>2.0V</b> <b>0V</b>	
25	BLUE-BACK-IN	REC: 1.8V PB: 1.8V	 <b>1.0Vp-p</b> <b>1.8V</b>	

Continued on next page.

# LA71598HM










Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
26	QV/QH-INS	REC: 0.0V PB:	0 to 0.8V: THROUGH 1.2 to 1.8V: BLACK INS 2.4 to 2.8V: WHITE HIS 3.4 to 3.8V: BLACK INS 3.9 to V <sub>CC</sub> : QV INS	
27 28	H.SYNC-OUT C.SYNC-OUT	REC: PB:	4.2V 0V	
29	VIDEO-OUT	REC: SYNC 0.8V PB: SYNC 0.8V	2.1V <sub>p-p</sub> 0.8V	
30	PEQCTL	REC: 0 or 5V PB: 1.0V		

Continued on next page.

# LA71598HM

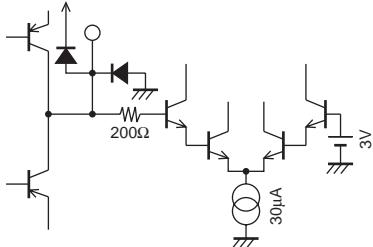






Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
31	VIDEO-AGC-IN	REC: 2.1V PB: 2.1V		
32	VIDEO-SW-OUT	REC: 1.8V PB: 1.8V		
33	AGC-TC2	REC: 2.0V	DC	
		PB: 2.0V	DC	
34 36 38	VIDEO-IN3 VIDEO-IN2 VIDEO-IN1	REC: 1.8V PB: 1.8V		
35	AFC2-FILT	REC: 3.5V PB: 3.5V		

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
37	SYNC DET-FILT	REC: 4.9V NO-SIG.: 0.3V	DC	
		PB: 4.9V NO-SIG.: 0.3V	DC	
39	REG4.0	REC: 4V	DC	
		PB: 4V		
40	ALWAYS-5V	5.0V	DC	
41	1HDL-IN	REC: 2.7V		
		PB: 2.7V		
42	VCA-FILT	REC: 3.0		
43	VCA-OUT	REC: 1.9V		
		PB: 1.9		

Continued on next page.

# LA71598HM






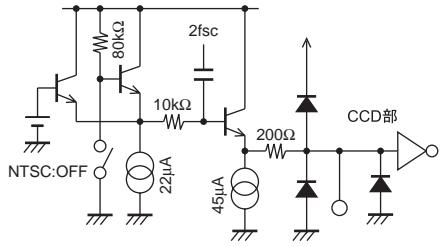


Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
44	PB H OUT	REC/PB	DC M(60Hz): High 4.3V Expect above: Low * Selected 4.43 only mode PB mode: High	
45	CCD-Y-IN	REC: 1.8V PB: 1.8V		
46	CCD-Y-OUT			
47	RD	REC: 2.0V PB: 2.0V	DC	
48	CCD-VCO FILT	REC: 2.3V PB: 2.3V	DC	
49	CCD-CLOCK-IN	REC: 1.2V PB: 1.2V		

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
50	3FSC-OUT		900mVp-p	
51	CCD-C-OUT	REC: 1.9V PB: 1.9V	140mVp-p 3.58MHz 	
52 54	CCD-C-IN1 CCD-C-IN2	REC: 2.4V PB: 2.4V	140mVp-p 3.58MHz 	
53	CCD-GND			
55	CCD-V <sub>CC</sub> -5V	5.0V	DC	
56	CCD-NT-CTL +2fsc-OUT	REC/PB	DC NTSC: High 3.5V Excepted above: Low (0.5V)	
57 59	C-DL-OUT C-0H-OUT	REC: 3.4V PB: 3.4V	140mVp-p 3.58MHz 	
58	C-V <sub>CC</sub> -5V	5.0V	DC	

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
60	SLD-FILT	REC: 3.5V	DC	
		PB: 3.5V	DC	
61	A-COMB-IN	REC: 3.3V		
		PB: 3.3V		
62	AFC/APC-FILT	REC: 3.5V		See pin 60
		PB: 3.5V		
63	VXO/XO-IN1 3.58M NTSC	REC: 4.0V		
		PB: 4.0V		
64 66	VXO/XO-OUT1 VXO/XO-OUT2	REC: 2.2V		
		PB: 2.2V		

Continued on next page.

# LA71598HM


Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
65	REC APC-FILT	REC: 2.4V	DC	
		PB: 2.4V	DC	
67	VXO/XO-IN1 PAL/BGI. M.N	REC: 4.0V		
		PB: 4.0V		
68	C-GND			
69	P/S-DET- FILT (PAL_M_ DET_FILT)	REC	DC SECAM/MESECAM: High 4.0V Except above: Low 2.0V * Selected C358 mode PAL_M_DET Wrong CTL: High	
		PB	DC MESECAM: High 4.0V Except above: Low 2.0V * Selected C358 mode PAL_M_DET Wrong CTL: High	
70	KILL-FILT	REC: 2.0V	DC	
		PB: 2.0V	DC	

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
71	PIREC-C	REC: 2.5V	REC chroma	
		PB: 2.5V	PB chroma	
72	REC-C-OUT	REC: 2.5V	380mVp-p 629MHz SP/EP (bit=0.0) 	
		PB: 0.3V	3.2V to V <sub>CC</sub> : Change the Sync-sep. Slice level	
73	P/S-DET-CTL (PAL-M-DET-CTL)	REC: 2.5V		
		PB: 2.5V		
74	POPBFMMN			
		PB: 2.0V	FM 300mVp-p	
75	A-V <sub>CC</sub>	5.0V	DC	
76 78 80	AUDIO-IN1 AUDIO-IN2 AUDIO-IN3	REC: 2.5V	CW: 95mVp-p	
		PB: 2.5V		

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
77	ALC-DET-	REC:	Detected DC voltage	
		PB: 0V		
79	VREF	REC: 2.5V	DC	
		PB: 2.5V	DC	
81 83 86 89	H.A GND			
82 91	PIPBSPL+ PIPBFPH+	REC: 4.1V		
		PB: 1.8V	0.5mVp-p	
84 90	PIPBSP- PIPBEP-	REC: 3.9V	13mA p-p	
		PB: 1.8V	0.5mVp-p	

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
85 88	PIPBSPH+ PIPBEPPL+	REC: 3.9V  PB: 1.8V	0.5mVp-p	
87	H.A V <sub>CC</sub>	5.0V	DC	
92	PHRDTFL	REV: 1.6V	DC	
		PB:		
93	POENVDET	REC:		
		PB: 0.5 to 4.9V	DC	
94	PIRADJI	REC: 0.7V	FM 500mVp-p	
		PB: When Trick 0.5V or 4.5V	HASW control DC output in trick mode	
95	A.GND			

Continued on next page.

# LA71598HM

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form
96	AUDIO LINE-OUT	REC: 2.5V (3.75V)	CW: 1.4Vp-p	
		PB: 2.5V (3.75V)	CW: 1.4Vp-p	
97	ALC-IN	REC: 0.0V	CW: 700mVp-p	
		PB: 0.0V		
98	AUDIO-REC- IN	REC: 2.5V (3.75V)	CW: 280mVp-p	
		PB: 2.5V (3.75V)		
99	AUTO-BIAS- OUT	REC: 4.3V	DC	
		PB: 5.0V (7.5V)		
100	AUDIO-PB-IN	REC: 2.5V (3.75V)	Half-wave rectified waveform +2.5V (70kHz)	
		PB: 2.5V (3.75V)	CW: 95mVp-p	

Continued on next page.

Mode Table REC-Y

PB-Y

**REC-C**

No.	Parameter	12	17A	19A	19B	20A	21	30A	31A	39A	44	46A	50A	56A	60A	61A	62A	63	64A	66	67	69	71A	74	Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8		
1	Chroma low freq. conversion output level	1	2	2	OFF	1	ON	1	1	OFF	OFF	2	OFF	OFF	ON	1	2	1	1	2	2	1	1	2	2	1	0010 0000 0000 1101	0010 0000 0000 1101	0010 0000 0000 1101	0010 0000 0000 1101	0010 0000 0000 1101	0010 0000 0000 1101	0010 0000 0000 1101	0010 0000 0000 1101
2	VXO oscillation level (PAL mode)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
3	REC ACC characteristics 1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
4	REC ACC characteristics 2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
5	REC ACC killer-on input level	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
6	REC ACC killer-on output level	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
7	REC ACC killer-on restored input level	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
8	REC APC pull-in range 1 (PAL mode)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
9	REC APC pull-in range 2 (PAL mode)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
10	REC AFC pull-in range 1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
11	REC AFC pull-in range 2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
12	Ratio of REC-C/Y/REC-C 1 (PAL mode)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
13	PILOT BURST amplitude	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
14	PILOT BURST phase	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
15	SYNC-DET threshold voltage	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
16	NEW AFC pull-in range 1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
17	NEW AFC pull-in range 2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
18	OUTPUT LEVEL OF 2FSC	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
19	HARMONICS OF 2FSC 1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				
20	HARMONICS OF 2FSC 1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓				

**PB-C**

No.	Parameter	12	17A	19A	19B	20A	21	30A	31A	39A	44	46A	50A	56A	60A	61A	62A	63	64A	66	67	69	71A	74	Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8
1	PB burst video output level (PAL mode)	1	2	2	OFF	2	ON	1	1	OFF	OFF	2	OFF	OFF	ON	1	2	1	1	2	2	0010 0101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101		
2	PB burst pin-72 output level	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
3	PB ACC characteristics 1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
4	PB ACC characteristics 2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
5	PB ACC killer-on input level	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
6	PB ACC killer-on chroma output	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
7	PB main converter carrier leakage	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
8	PB XO output level (PAL mode)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
9	PB XO oscillation frequency deviation	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
10	NTSC-PAL conversion V-axis burst level	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
11	NTSC-PAL conversion ratio of burst level	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
12	PB Chroma 2nd harmonic distortion	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		

**REC-EQ**

No.	Parameter	12	17A	19A	19B	20A	21	30A	31A	39A	44	46A	50A	56A	60A	61A	62A	63	64A	66	67	69	71A	74	Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8
1	REC EQ characteristics 1	1	1	2	OFF	1	ON	1	1	OFF	OFF	2	OFF	OFF	ON	1	2	1	1	2	1	2	0010 0000	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	
2	REC EQ 2nd distortion	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓			
3	REC EQ 2nd distortion	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓			
4	REC EQ characteristics 3	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓			

**PB-EQ**

No.	Parameter	12	17A	19A	19B	20A	21	30A	31A	39A	44	46A	50A	56A	60A	61A	62A	63	64A	66	67	69	71A	74	Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8
1	PB EQ characteristics 1	1	1	2	OFF	1	ON	1	1	OFF	OFF	2	OFF	OFF	ON	1	2	1	1	2	1	2	0010 0101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	0000 1101	
2	PB EQ 2nd distortion	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓			
3	PB EQ Low Trap characteristics	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓			
4	PB EQ High Trap characteristics	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓			

## Head Amp MODE TABLE

PB

REC

## REC PAL/SEC

No.	Parameter	12	17A	19A	19B	20A	21	30A	31A	39A	44	46A	50A	56A	60A	61A	64A	66	67	69	71A	74	Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8
1	Output level of PAL/SEC discriminator	1	1	2	OFF	1	ON	1	1	OFF	OFF	2	OFF	OFF	ON	1	2	1	1	1	2	0010 0000	0000 1101	00000 0010	0100 0100	0110 0100	0100 0101	0011 01**	0011 0000	

## PB PAL/SEC

No.	Parameter	12	17A	19A	19B	20A	21	30A	31A	39A	44	46A	50A	56A	60A	61A	64A	66	67	69	71A	74	Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8
1	Input level of R/P discriminator	1	1	2	OFF	1	ON	1	1	OFF	OFF	2	OFF	OFF	ON	1	2	1	1	2	1	0010 0101	0000 1101	00000 0010	0100 0000	0110 0100	0011 0100	0011 0000		
2	Burst position of P/S discriminator	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		

## REC/PB PAL/SEC

No.	Parameter	12	17A	19A	19B	20A	21	30A	31A	39A	44	46A	50A	56A	60A	61A	64A	66	67	69	71A	74	Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8
1	Center value of fine adjustment	1	1	2	OFF	1	ON	1	1	OFF	OFF	2	OFF	OFF	ON	1	2	1	1	2	1	0010 0101	0000 1101	00000 0010	0100 0000	0110 0100	0011 0100	0011 0000		
2	Threshold voltage of P/S discriminator 1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
3	Threshold voltage of P/S discriminator 2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		

**SERIAL Control Table**

ADDRESS	8	7	6	5	4	3	2	1		
Group 1 MODE-1							0	0	VIDEO REC	
							0	1	VIDEO PB	
							1	0	VIDEO EE	*
							1	1	VIDEO REC PUASE (BIT TEST ON)	
					0	0			REC: V IN-1	*
					0	1			REC: V IN-2	
					1	0			REC: V IN-3	
					1	1			REC: Y/C SEP IN (INJ UP)	
						0			PB: ANR OFF	*
						1			PB: ANR ON	
						0			PB: Y/C MIX ON	*
						1			PB: Y/C MIX OFF	
			0	0					AUDIO REC	
			0	1					AUDIO PB	
			1	0					AUDIO EE	*
			1	1					PROHIBIT (Y-TEST MODE)	
	0	0							A IN-1	*
	0	1							A IN-2	
	1	0							A IN-3	
	1	1							PROHIBIT (INJ DOWN SELECT)	

ADDRESS	8	7	6	5	4	3	2	1		
Group 2 SYSTEM						0	0		NTSC/M	
						0	1		PAL-GBI,N/EM	*
						1	0		PAL-M/M	
						1	1		SECAM/MESECAM/EM *1	
					0				Y-3.58MHz	
					1				Y-4.43MHz	*
					0				C-3.58MHz	
					1				C-4.43MHz	*
		0	0						AUTO KILLER	*
		0	1						FORCED COLOR/MESECAM SELECT *1	
		1	0						FORCED KILLER/SECAM SELECT *1	
		1	1						PROHIBIT (INJ U/D & T-TEST SELECT)	
		0							NORMAL MODE	*
		1							BLUE BACK MODE (T-TEST)	
	0								REC: Pilot burst 270 DEG/PB: ENV DET SENS = HIGH	*
	1								REC: Pilot burst 90 DEG/PB: ENV DET SENS = LOW	

**CAUTION; Gr3 bit-4, 3**  
**LA71578HM bit-4=0, bit-3=(no-care)**



ADDRESS	8	7	6	5	4	3	2	1	
Group 3								0	NORMAL Vxo
								1	FORCED XO
							0		DOC OFF/REC-EQ: STEEP
							1		DOC AUTO/REC-EQ: STEEPNESS
						0			NON-CORRE OUT MODE; LA71598M ONLY ← CAUTION
						1			CHOROMA DET OUT MODE; LA71598M ONLY ← CAUTION
					0				LA71578HM MODE ← CAUTION
					1				LA71598HM MODE ← CAUTION
			0	0					SP (VIDEO) & CARRIER SHIFT OFF
		0	1						LP (VIDEO)
MODE-2		1	0						EP (VIDEO)
		1	1						SP (VIDEO) & CARRIER SHIFT ON
	0	0							SP (AUDIO)
	0	1							LP (AUDIO)
	1	0							EP (AUDIO)
	1	1							PROHIBIT (F-TEST MODE)

ADDRESS	8	7	6	5	4	3	2	1	
Group 4							0	0	YNR/LNC OFF *2
							0	1	YNR/LNC STANDARD *2
							1	0	YNR/LNC MEDIUM *2
							1	1	YNR/LNC STRONG *2
						0			YNR MODE
						1			LNC MODE
			0	0	0				NC1 CTL/DETAIL CTL-1 LIM = MIN
			0	0	1				NC1 CTL/DETAIL CTL-2
			0	1	0				NC1 CTL/DETAIL CTL-3
			0	1	1				NC1 CTL/DETAIL CTL-4
NR			1	0	0				NC1 CTL/DETAIL CTL-5
			1	0	1				NC1 CTL/DETAIL CTL-6
			1	1	0				NC1 CTL/DETAIL CTL-7
			1	1	1				NC1 CTL/DETAIL CTL-8 LIM = MAX
		0	0						Y DELAY -80N
		0	1						Y DELAY 0N
		1	0						Y DELAY 80N
		1	1						Y DELAY 160N

# LA71598HM

---

ADDRESS	8	7	6	5	4	3	2	1		
Group 5 EQ							0	0	PB EQ F0. 6.0M	
							0	1	PB EQ F0. 5.5M	*
							1	0	PB EQ F0. 5.0M	
							1	1	PB EQ F0. 4.5M	
					0	0			R/P EQ TRAP: 500k+650k	
					0	1			R/P EQ TRAP: 500k+800k	*
					1	0			R/P EQ TRAP: 500k+1.1M	
					1	1			R/P EQ TRAP: 500k	
			0	0					PB EQ PEAK-Narrow/REC EQ SLOPE-GENTLE	
			0	1					PB EQ PEAK-2/REC EQ SLOPE-2	
			1	0					PB EQ PEAK-3/REC EQ SLOPE-3	*
			1	1					PB EQ PEAK-Wide/REC EQ SLOPE-STEEP	
	0	0							PB EQ H-TRAP 10MHz/REC EQ H-TRAP 10MHz	
	0	1							PB EQ H-TRAP 9MHz/REC EQ H-TRAP 9MHz	*
	1	0							PB EQ H-TRAP 8MHz/REC EQ H-TRAP 8MHz	
	1	1							PB EQ H-TRAP 7MHz/REC EQ H-TRAP 7MHz	

ADDRESS	8	7	6	5	4	3	2	1		
Group 6 at PB MODE							0	CHILD LOCK OFF	*	
							1	CHILD LOCK ON		
							0	PHASE ALTERNATOR ON; PAL ONLY	*	
							1	PHASE ALTERNATOR OFF; PAL ONLY		
					0			NORMAL PB		
					1			TRICK PB	*	
					0			APC LOOP BEFORE	*	
					1			APC LOOP AFTER		
			0						*	
			1							
	0	0	0					PIC CTL -6dB / soft		
	0	0	1					PIC CTL -4dB		
	0	1	0					PIC CTL -2dB		
	0	1	1					PIC CTL 0dB		
	1	0	0					PIC CTL 0dB	*	
	1	0	1					PIC CTL +2dB		
	1	1	0					PIC CTL +4dB		
	1	1	1					PIC CTL +6dB/sharp		

# LA71598HM

---

ADDRESS	8	7	6	5	4	3	2	1		
Group 6 at REC MODE							0	0	REC FM LEVEL -0.9dB	*
							0	1	REC FM LEVEL -0dB	
							1	0	REC FM LEVEL +0.9dB	
							1	1	REC FM LEVEL +1.8dB	
							0		WC 195%	
							1		WC 185%	*
							0		NORMAL MODE	*
							1		SYNC CARRIER OUT MODE	
	0	0	0	0					REC CURRENT-1/MIN	
	0	0	0	1					REC CURRENT-2	
	0	0	1	0					REC CURRENT-3	
	0	0	1	1					REC CURRENT-4	
	0	1	0	0					REC CURRENT-5	
	0	1	0	1					REC CURRENT-6	
	0	1	1	0					REC CURRENT-7	
	0	1	1	1					REC CURRENT-8	
	1	0	0	0					REC CURRENT-9/TYP	*
	1	0	0	1					REC CURRENT-10	
	1	0	1	0					REC CURRENT-11	
	1	0	1	1					REC CURRENT-12	
	1	1	0	0					REC CURRENT-13	
	1	1	0	1					REC CURRENT-14	
	1	1	1	0					REC CURRENT-15	
	1	1	1	1					REC CURRENT-16/MAX	

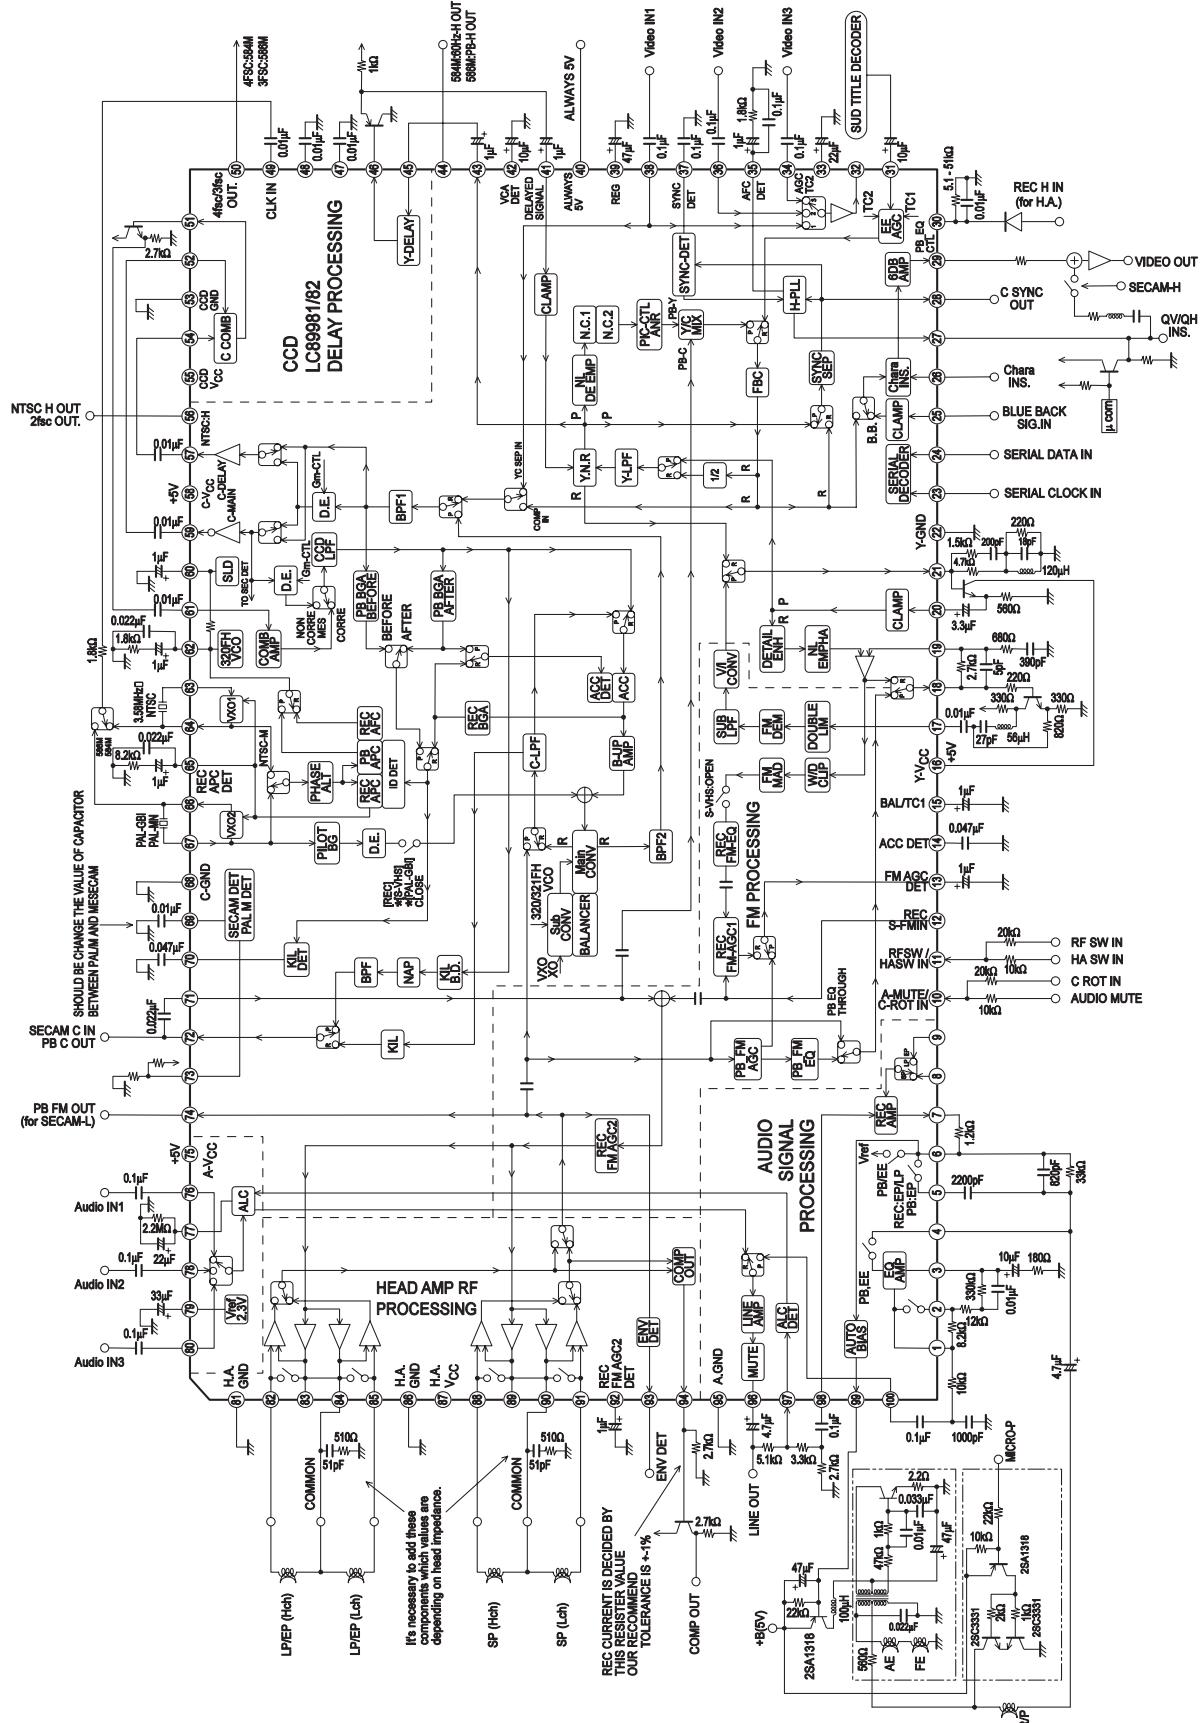
ADDRESS	8	7	6	5	4	3	2	1		
Group 7 LEVEL CTL							0	0	REC C LEVEL 0dB/PB NORMAL	*
							0	1	REC C LEVEL -1.5dB/PB NAP	
							1	0	REC C LEVEL -3.0dB/PB BALA-MOD	
							1	1	REC C LEVEL -4.5dB/PB PROHIBIT (NO-OPERATION)	
							0		CG NORMAL/PB BST DE-EM -5.0dB	*
							1		CG STOP/PB BST DE-EM -5.5dB	
							0		NORMAL	*
							1		PROHIBIT (T-TEST)	
				0					BGP=INTERVAL	*
				1					BGP=CONTINUE	
			0						SYNC SLICE LEVEL=SYNC TIP SIDE	*
			1						SYNC SLICE LEVEL=PEDESTAL SIDE	
	0	0							NL OFF	*
	0	1							NL STRONG	
	1	0							NL MEDIUM	
	1	1							NL STANDARD	

ADDRESS	8	7	6	5	4	3	2	1		
Group 8				0	0	0	0	0	PB:AUDIO LEVEL-1/LOW	*
				0	0	0	0	1	PB:AUDIO LEVEL-2	
				0	0	0	1	0	PB:AUDIO LEVEL-3	
				0	0	0	1	1	PB:AUDIO LEVEL-4	
				0	0	1	0	0	PB:AUDIO LEVEL-5	
				0	0	1	0	1	PB:AUDIO LEVEL-6	
				0	0	1	1	0	PB:AUDIO LEVEL-7	
				0	0	1	1	1	PB:AUDIO LEVEL-8	
OTHERS				0	1	0	0	0	PB:AUDIO LEVEL-9	
				0	1	0	0	1	PB:AUDIO LEVEL-10	
				0	1	0	1	0	PB:AUDIO LEVEL-11	
				0	1	0	1	1	PB:AUDIO LEVEL-12	
				0	1	1	0	0	PB:AUDIO LEVEL-13	
				0	1	1	0	1	PB:AUDIO LEVEL-14	
				0	1	1	1	0	PB:AUDIO LEVEL-15	
				0	1	1	1	1	PB:AUDIO LEVEL-16	
				1	0	0	0	0	PB:AUDIO LEVEL-17	
				1	0	0	0	1	PB:AUDIO LEVEL-18	
				1	0	0	1	0	PB:AUDIO LEVEL-19	
				1	0	0	1	1	PB:AUDIO LEVEL-20	
				1	0	1	0	0	PB:AUDIO LEVEL-21	
				1	0	1	0	1	PB:AUDIO LEVEL-22	
				1	0	1	1	0	PB:AUDIO LEVEL-23	
				1	0	1	1	1	PB:AUDIO LEVEL-24	
				1	1	0	0	0	PB:AUDIO LEVEL-25	
				1	1	0	0	1	PB:AUDIO LEVEL-26	
				1	1	0	1	0	PB:AUDIO LEVEL-27	
				1	1	0	1	1	PB:AUDIO LEVEL-28	
				1	1	1	0	0	PB:AUDIO LEVEL-29	
				1	1	1	0	1	PB:AUDIO LEVEL-30	
				1	1	1	1	0	PB:AUDIO LEVEL-31	
				1	1	1	1	1	PB:AUDIO LEVEL-32/HIGH	
				0					AUDIO AUTO BIAS	*
				1					AUDIO BIAS ADJ MODE	
				0					INTERNAL EQ	*
				1					EXTERNAL EQ	
	1								SVHS	

Contents ;

- (\*) mark shows initial condition.
- PROHIBIT, ( ) mark shows test mode control. Cannot use their bits, except test mode.
- SLAVE ADDRESS is [1110 001].
- SDA OUT DATA (BIT-8 TO BIT-2): PAL/MESEC DET OUT, SYNC DET OUT, PAL-M DET OUT, KILLER OUT, V-LATCH RESULT (for Group-6), V-LATCH RESULT (for Group-5), ACC-KIL OUT
- This LSI is controlled by auto address increment mode.
- This LSI has V-latch system. (controlled by RF-SW pulse)
- V-latch items: Gr5 and Gr6 (all bits)
- \*1 BIT 6, 5, 2, 1= 0, 1, 1, 1 (MESECAM MODE)  
BIT 6, 5, 2, 1= 1, 0, 1, 1 (SECAM MODE)
- \*2 On REC-LNC mode, we recommend LNC-OFF or LNC STANDARD mode.

# Sample Application



- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of March, 2007. Specifications and information herein are subject to change without notice.