



AO9926A


Dual N-Channel Enhancement Mode Field Effect Transistor

General Description


The AO9926A uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. They offer operation over a wide gate drive range from 1.8V to 8V. The two devices may be used individually, in parallel or to form a bidirectional blocking switch.

Features

V_{DS} (V) = 20V
 I_D = 7A
 $R_{DS(ON)} < 26m\Omega$ ($V_{GS} = 4.5V$)
 $R_{DS(ON)} < 33m\Omega$ ($V_{GS} = 2.5V$)
 $R_{DS(ON)} < 42m\Omega$ ($V_{GS} = 1.8V$)



SOIC-8

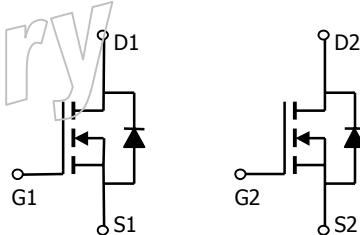

Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 8	V
Continuous Drain Current ^A	I_D	7	A
$T_A=70^\circ C$	I_D	6	
Pulsed Drain Current ^B	I_{DM}	40	
Power Dissipation	P_D	2	W
$T_A=70^\circ C$	P_D	1.44	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	48	62.5	°C/W
Maximum Junction-to-Ambient ^A		74	110	°C/W
Maximum Junction-to-Lead ^C	$R_{\theta JL}$	35	40	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	20			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=16\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 8\text{V}$			100	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	0.3	0.5	0.8	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=4.5\text{V}, V_{DS}=5\text{V}$	30			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=4.5\text{V}, I_D=7\text{A}$		21.6	26	$\text{m}\Omega$
		$T_J=125^\circ\text{C}$		29.2	36	
		$V_{GS}=2.5\text{V}, I_D=5\text{A}$		26.4	33	$\text{m}\Omega$
		$V_{GS}=1.8\text{V}, I_D=4\text{A}$		33.3	42	$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=5\text{V}, I_D=5\text{A}$		22		S
V_{SD}	Diode Forward Voltage	$I_S=1\text{A}$		0.76	1	V
I_S	Maximum Body-Diode Continuous Current				3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=10\text{V}, f=1\text{MHz}$		1050		pF
C_{oss}	Output Capacitance			163		pF
C_{rss}	Reverse Transfer Capacitance			129		pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$		4		Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=4.5\text{V}, V_{DS}=10\text{V}, I_D=7\text{A}$		15.2		nC
Q_{gs}	Gate Source Charge			1		nC
Q_{gd}	Gate Drain Charge			4		nC
$t_{\text{D(on)}}$	Turn-On Delay Time	$V_{GS}=5\text{V}, V_{DS}=10\text{V}, R_L=1.5\Omega, R_{\text{GEN}}=3\Omega$		6.5		ns
t_r	Turn-On Rise Time			9		ns
$t_{\text{D(off)}}$	Turn-Off Delay Time			56.5		ns
t_f	Turn-Off Fall Time			13.2		ns
t_{rr}	Body Diode Reverse Recovery time	$I_F=5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		21		ns
Q_{rr}	Body Diode Reverse Recovery charge	$I_F=5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		7.1		nC

A: The value of R_{0JA} is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The value in any given application depends on the user's specific board design. The current rating is based on the $t \leq 10\text{s}$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The R_{0JA} is the sum of the thermal impedance from junction to lead R_{0JL} and lead to ambient.

D. The static characteristics in Figures 1 to 6 are obtained using 80 μs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The SOA curve provides a single pulse rating.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

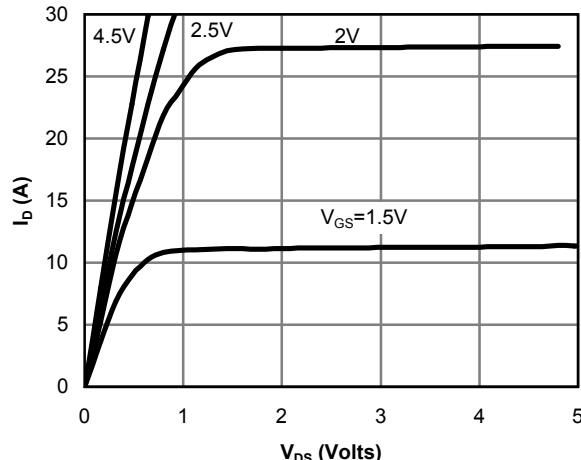


Fig 1: On-Region Characteristics

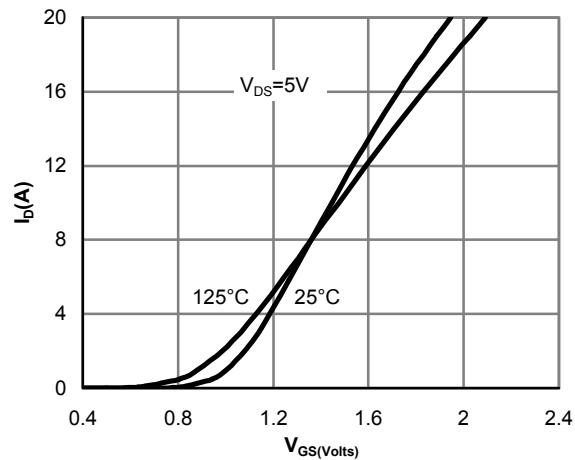


Figure 2: Transfer Characteristics

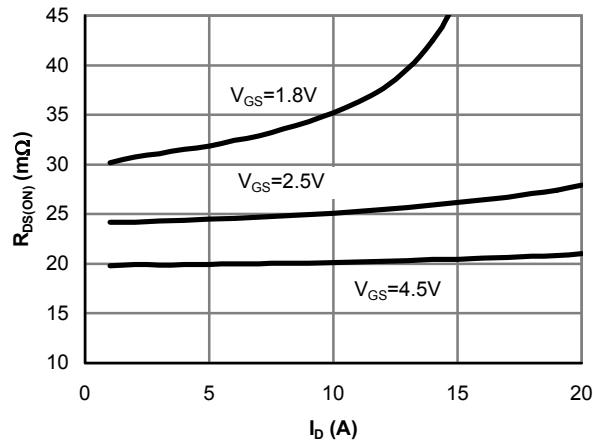


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

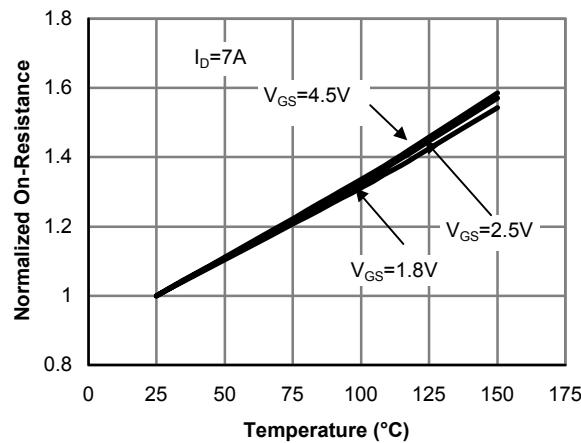


Figure 4: On-Resistance vs. Junction Temperature

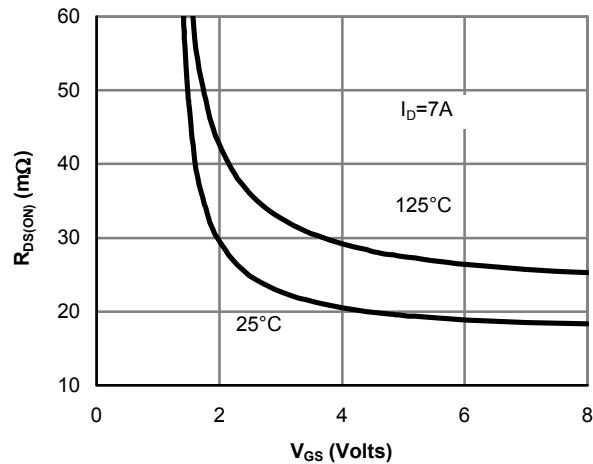


Figure 5: On-Resistance vs. Gate-Source Voltage

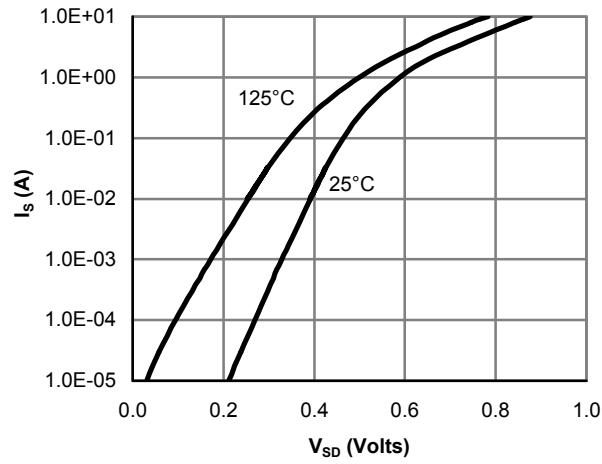


Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

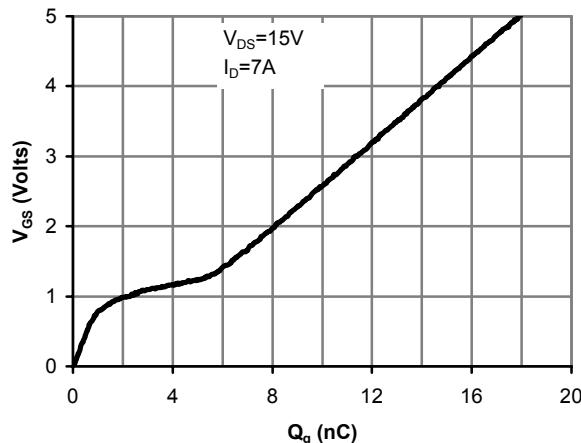


Figure 7: Gate-Charge Characteristics

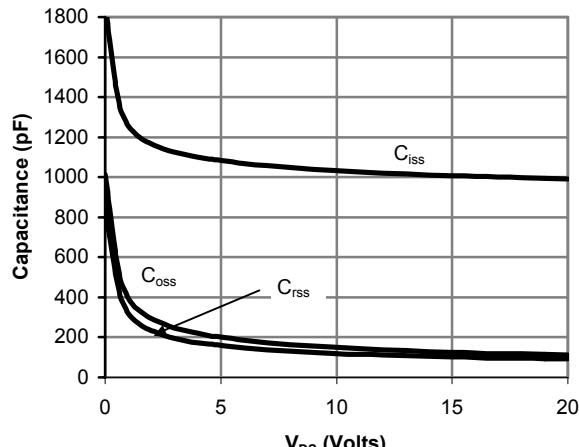


Figure 8: Capacitance Characteristics

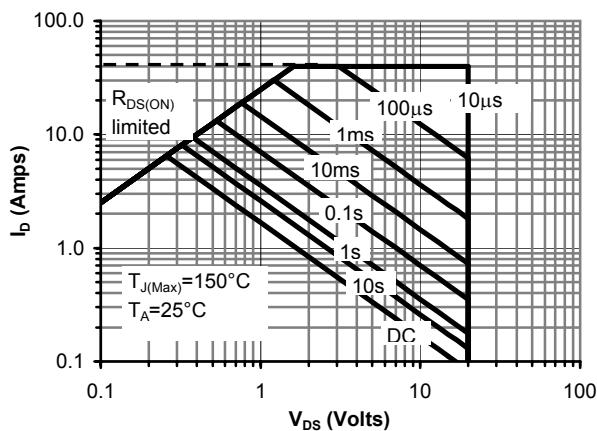


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

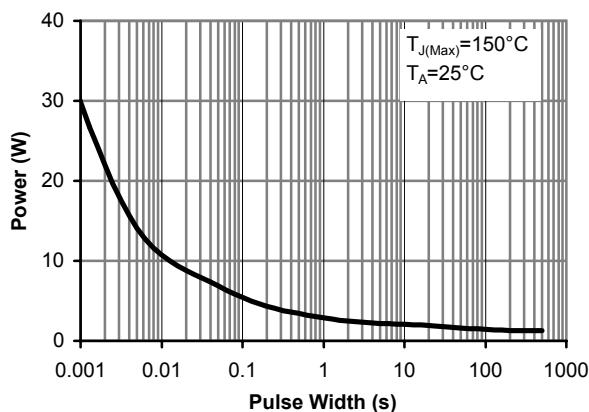


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)


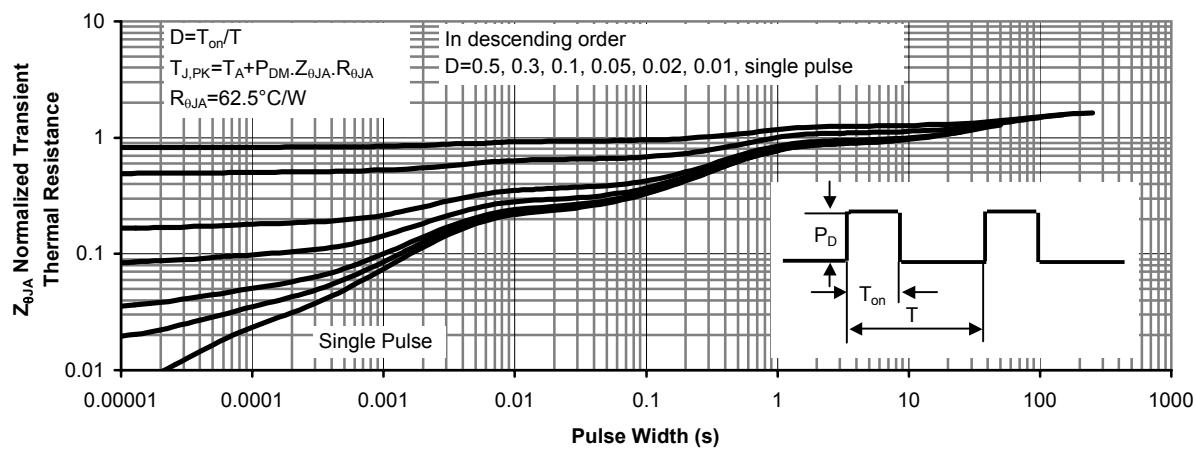


Figure 11: Normalized Maximum Transient Thermal Impedance



ALPHA & OMEGA
SEMICONDUCTOR, INC.

SO-8 Package Data

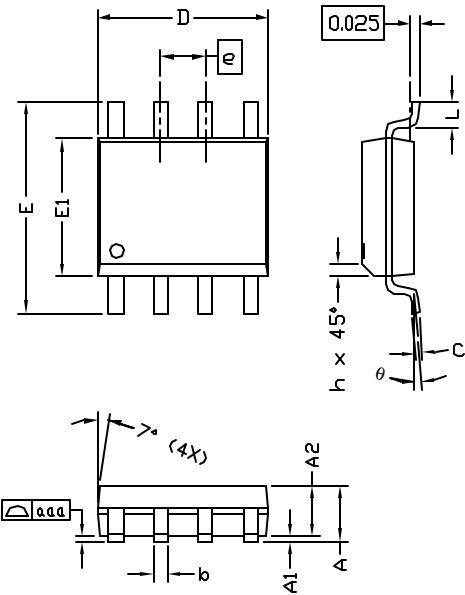

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.45	1.50	1.55	0.057	0.059	0.061
A1	0.00	—	0.10	0.000	—	0.004
A2	—	1.45	—	—	0.057	—
b	0.33	—	0.51	0.013	—	0.020
c	0.19	—	0.25	0.007	—	0.010
D	4.80	—	5.00	0.189	—	0.197
E1	3.80	—	4.00	0.150	—	0.157
e	1.27 BSC			0.050 BSC		
E	5.80	—	6.20	0.228	—	0.244
h	0.25	—	0.50	0.010	—	0.020
L	0.40	—	1.27	0.016	—	0.050
aaa	—	—	0.10	—	—	0.004
θ	0°	—	8°	0°	—	8°

NOTE:

1. LEAD FINISH: 150 MICROINCHES (3.8 μ m) MIN.
THICKNESS OF Tin/Lead (SOLDER) PLATED ON LEAD
2. TOLERANCE ± 0.10 mm (4 mil) UNLESS OTHERWISE SPECIFIED
3. COPLANARITY : 0.10 mm
4. DIMENSION L IS MEASURED IN GAGE PLANE

PACKAGE MARKING DESCRIPTION




NOTE:
 LOGO - AOS LOGO
 9926A - PART NUMBER CODE.
 F - FAB LOCATION
 A - ASSEMBLY LOCATION
 Y - YEAR CODE
 W - WEEK CODE.
 LC - ASSEMBLY LOT CODE

SO-8 PART NO. CODE

PART NO.	CODE
AO9926A	9926A

RECOMMENDED LAND PATTERN






ALPHA & OMEGA
SEMICONDUCTOR, INC.

SO-8 Tape and Reel Data


SO-8 Carrier Tape

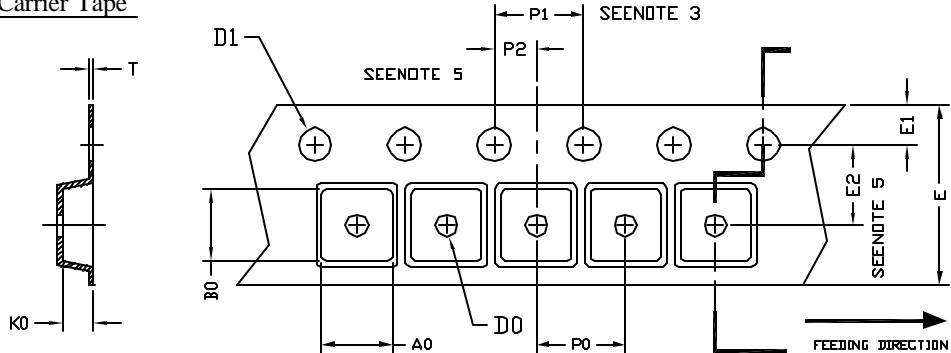

UNIT: MM

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
SO-8 (12 mm)	6.40 ± 0.10	5.20 ± 0.10	2.10 ± 0.10	1.60 ± 0.10	1.50 ± 0.10	12.00 ± 0.30	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.25 ± 0.05

SO-8 Reel

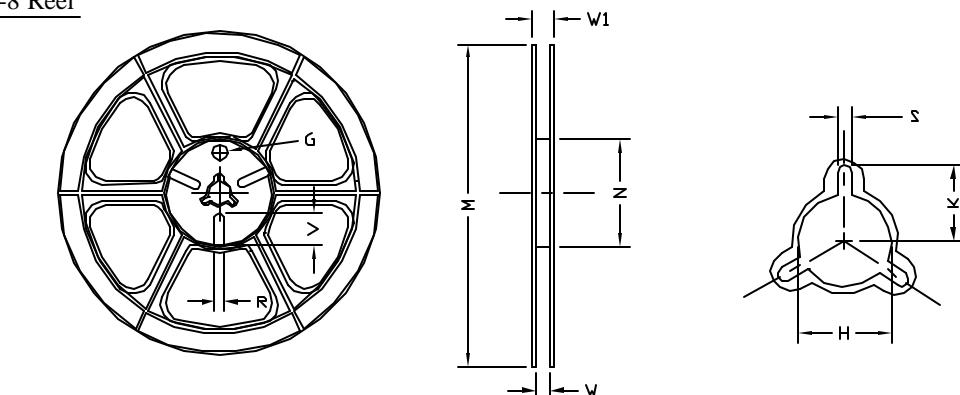

UNIT: MM

TAPE SIZE	REEL SIZE	M	N	W	W1	H	K	S	G	R	V
12 mm	$\phi 330$	$\phi 330.00$ ± 0.50	$\phi 97.00$ ± 0.10	13.00 ± 0.30	17.40 ± 1.00	$\phi 13.00$ $+0.50$ -0.20	10.60	2.00 ± 0.50	---	---	---

SO-8 Tape

Leader / Trailer
& Orientation

