

**2SC4673**


UHF Low-Noise Amp, Wide-Band Amp Applications

Features

- Low noise figure : NF=1.5dB typ (f=0.9GHz).
- High power gain : $|S_{21e}|^2=8.0\text{dB typ (f=0.9GHz)}$.
- High cutoff frequency : $f_T=4.5\text{GHz typ}$.

Package Dimensions

unit: mm

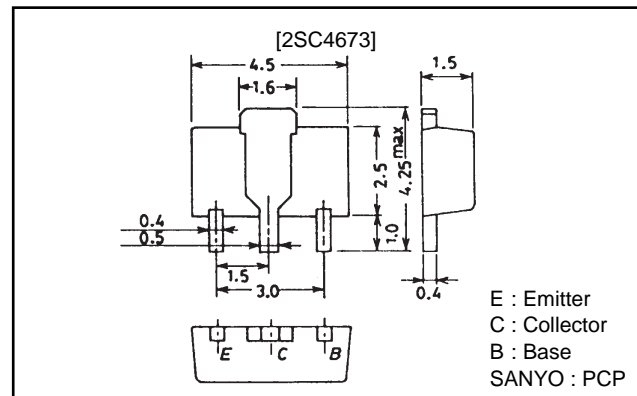2038-PCP

Specifications

Absolute Maximum Ratings at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		20	V
Collector-to-Emitter Voltage	V_{CEO}		12	V
Emitter-to-Base Voltage	V_{EBO}		3	V
Collector Current	I_C		100	mA
Base Current	I_B		30	mA
Collector Dissipation	P_C		400	mW
		Mounted on ceramic board (250mm ² ×0.8mm)	800	mW
Junction Temperature	T_j		150	°C
Storage Temperature	T_{stg}		-55 to +150	°C

Electrical Characteristics at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB}=12\text{V}, I_E=0$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=2\text{V}, I_C=0$			10	μA
DC Current Gain	h_{FE}	$V_{CE}=10\text{V}, I_C=20\text{mA}$	40*		200*	
Gain-Bandwidth Product	f_T	$V_{CE}=10\text{V}, I_C=20\text{mA}$		4.5		GHz
Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, f=1\text{MHz}$		1.1		pF
Reverse Transfer Capacitance	C_{re}	$V_{CB}=10\text{V}, f=1\text{MHz}$		0.75		pF
Forward Transfer Gain	$ S_{21e} ^2$	$V_{CE}=10\text{V}, I_C=20\text{mA}, f=0.9\text{GHz}$		8.0		dB
Noise Figure	NF	$V_{CE}=10\text{V}, I_C=5\text{mA}, f=0.9\text{GHz}$		1.5	3.0	dB

* : The 2SC4673 is classified by 20mA h_{FE} as follows :

40	C	80	60	D	120	100	E	200
----	---	----	----	---	-----	-----	---	-----


Making : CD

 h_{FE} rank : C, D, E
SANYO Electric Co., Ltd. Semiconductor Business Headquarters





TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN



11697YK (KOTO) 8-6790 No.3927-1/4

NT Test Circuit

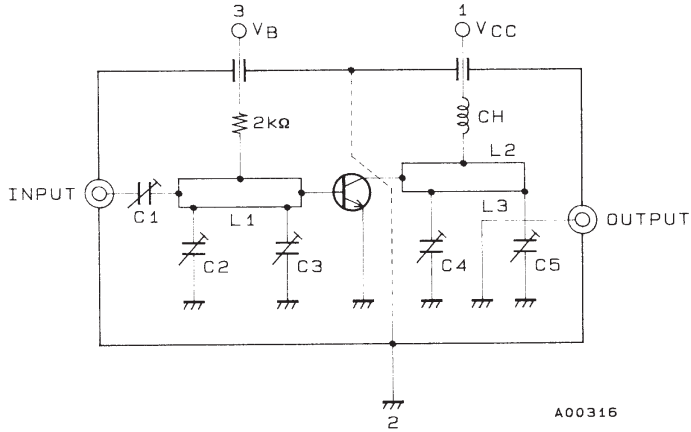


900MHz	
C1	up to 5pF
C2	up to 10pF
C3	up to 10pF
C4	up to 10pF
C5	up to 10pF
L1	W ≅ 1.5mm l ≅ 25mm Strip line
L2	W ≅ 4mm l ≅ 25mm Strip line
L3	0.5φ, l ≅ 4mm
CH	2t + bead core

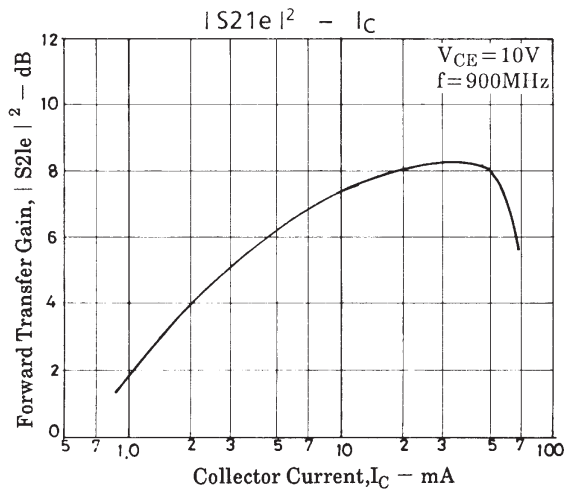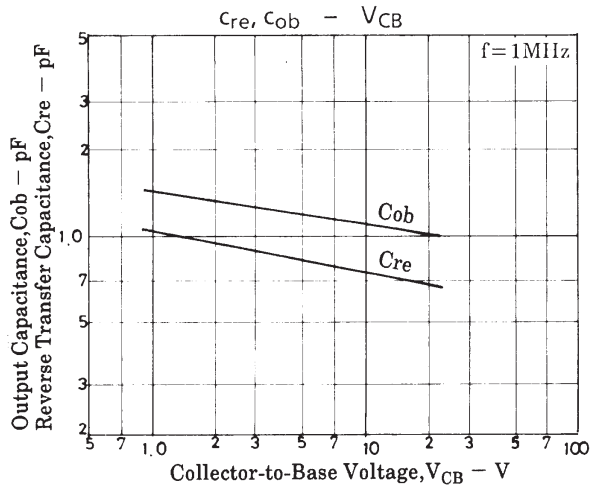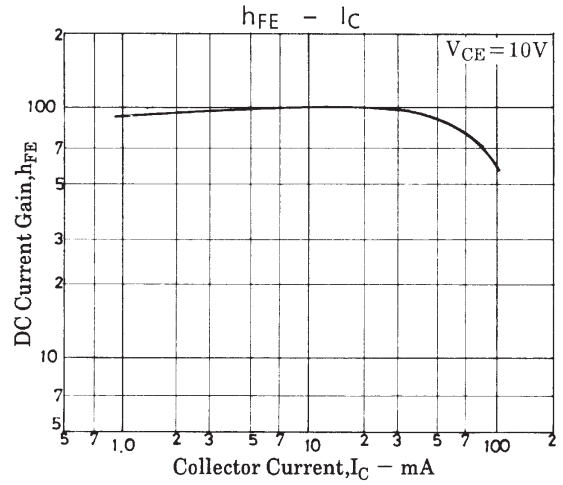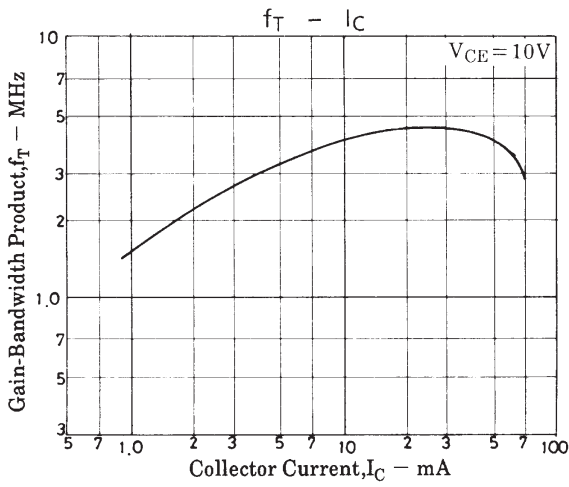

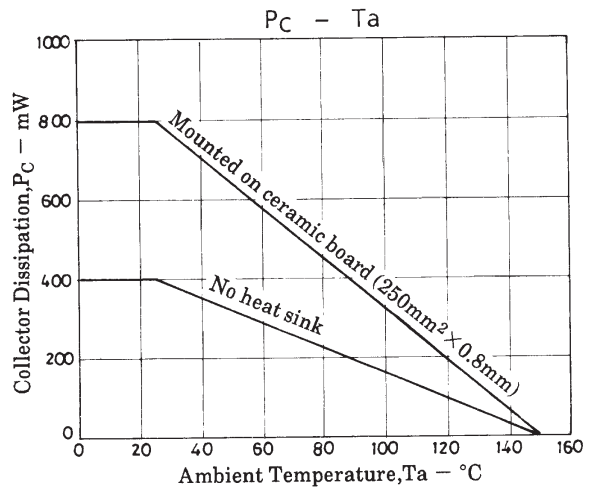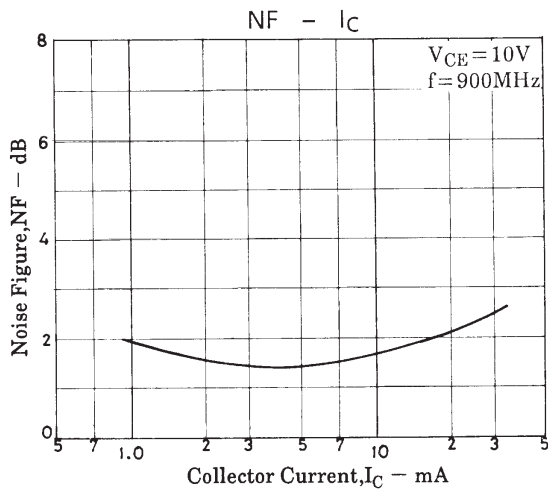


S Parameters


S11e: $V_{CE} = -10V$
 $f = 100MHz, 200 \text{ to } 1200MHz$ (200MHz step)

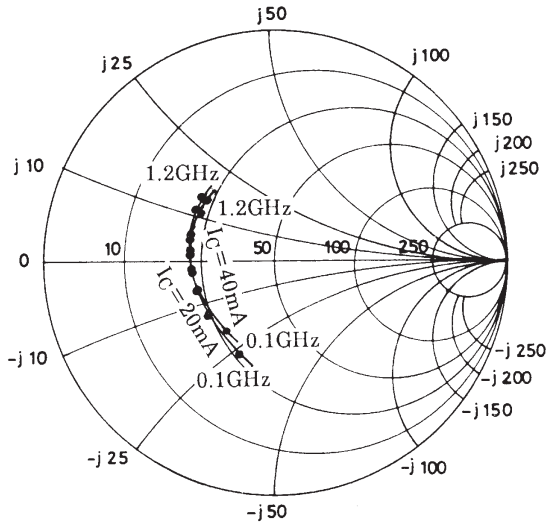


S12e: $V_{CE} = 10V$
 $f = 100MHz, 200 \text{ to } 1200MHz$ (200MHz step)
 $Z_o = 50\Omega$

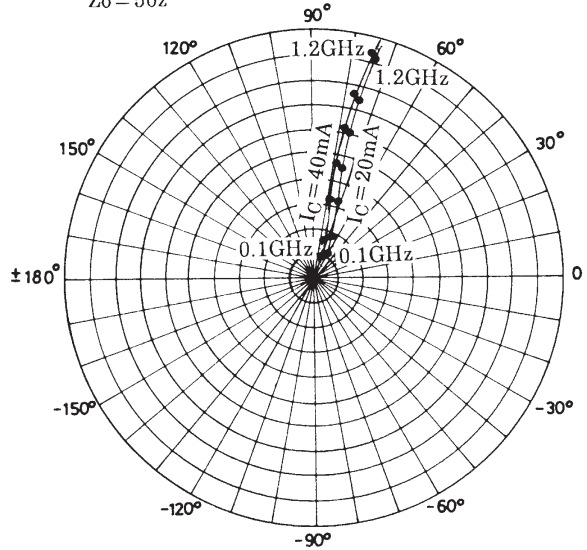

S21e: $V_{CE} = 10V$
 $f = 100MHz, 200 \text{ to } 1200MHz$ (200MHz step)

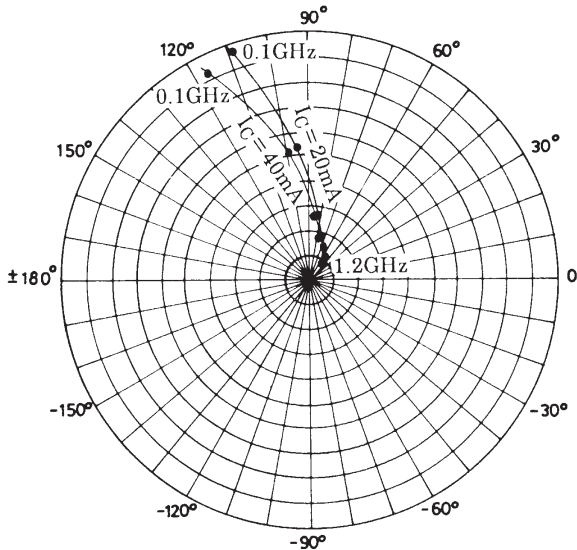

S22e: $V_{CE} = 10V$
 $f = 100MHz, 200 \text{ to } 1200MHz$ (200MHz step)

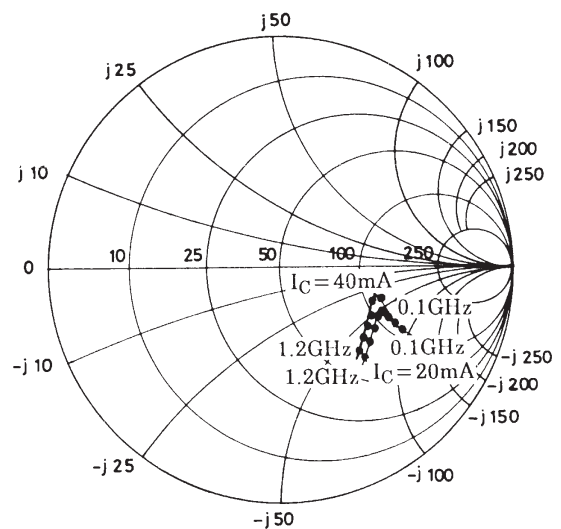

S Parameters (Common emitter) $V_{CE}=10V, I_C=20mA, Z_o=50\Omega$

Freq (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100	0.414	-112.1	18.300	115.9	0.024	61.1	0.605	-26.4
200	0.372	-147.5	10.148	99.2	0.037	66.4	0.492	-23.5
400	0.364	-175.7	5.274	84.8	0.064	72.9	0.458	-23.0
600	0.369	170.1	3.619	75.6	0.093	75.3	0.460	-27.3
800	0.379	158.7	2.764	67.8	0.123	76.6	0.468	-32.6
900	0.366	153.6	2.504	66.4	0.139	75.4	0.475	-35.7
1000	0.388	148.5	2.279	60.8	0.152	75.1	0.478	-38.5
1200	0.399	140.5	1.914	54.2	0.184	74.0	0.487	-44.4

 $V_{CE}=10V, I_C=40mA, Z_o=50\Omega$

Freq (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100	0.730	-133.7	19.714	109.3	0.021	66.4	0.535	-25.3
200	0.363	-161.5	10.534	95.3	0.035	72.5	0.452	-20.6
400	0.366	177.6	5.411	82.8	0.064	77.3	0.438	-21.1
600	0.371	166.7	3.690	74.3	0.094	77.9	0.444	-25.9
800	0.380	156.9	2.823	66.8	0.125	77.3	0.454	-31.7
900	0.389	153.1	2.562	63.5	0.142	76.8	0.462	-35.1
1000	0.391	148.3	2.329	59.9	0.155	76.1	0.465	-37.7
1200	0.404	141.3	1.982	53.6	0.186	74.7	0.474	-43.8

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of January, 1997. Specifications and information herein are subject to change without notice.