


TA8402F

3 PHASE HALL MOTOR DRIVER.

TA8402F is output current detect voltage drive type 3 phase unipolar hall motor driver. Bipolar drive also available with additional transistors.

- . 3 Phase Unipolar Hall Motor Driver and Also Available Bipolar Drivers with Additional Transistors.
- . Build in Control Amplifier.
- . Build in Regulator for Hall Sensors.
- . Output Current Up to 1.0A Max.(AVE).
- . Wide Range of Operating Voltage
: $V_{CC\text{ opr}}=4.0\sim 15V$, $V_S\text{ opr}=0\sim 15V$
- . Build in Thermal Shut Down Circuit.

Unit in mm

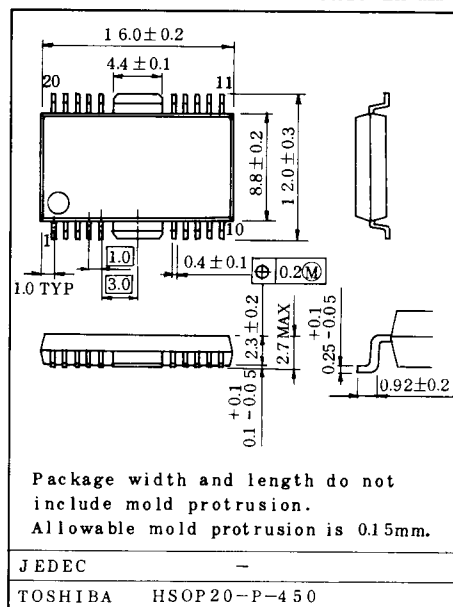

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage (Control)		V_{CC}	18	V
Supply Voltage (Motor)		V_S	18	V
Output Current	I_a, I_b, I_c	I_O	1.0	A
	I_{a1}, I_{b1}, I_{c1}	I_{ℓ}	30	mA
	Regulator (for Hall Sensor)	I_H	15	mA
Power Dissipation		P_D	1.0 3.2 ^{Note 1}	W
Operating Temperature		T_{opr}	$-30\sim 75$	$^\circ\text{C}$
Storage Temperature		T_{stg}	$-55\sim 150$	$^\circ\text{C}$

Note 1. This rating is obtained by $50 \times 50 \times 1\text{mm}$ Fe board mounting.

TA8402F

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, $T_a=25^{\circ}\text{C}$, $V_{CC}=5\text{V}$)

ELECTRICAL CHARACTERISTICS					(Unless otherwise specified, $T_a=25^{\circ}\text{C}$, $V_{CC}=5\text{V}$)				
CHARACTERISTIC			SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current			I_{CC1}		Stop Mode, Output Open, No Hall Bias	-	1	3	mA
			I_{CC2}		FWD/REV Mode, Output Open, Hall Bias 1.5V	-	12.5	20	mA
Output Saturation Voltage			V_{SAT1}		$I_O=0.1\text{A}$	-	0.1	0.2	V
			V_{SAT2}		$I_O=1.0\text{A}$	-	0.8	1.4	
			V_{SAT3}		$I_O=0.5\text{A}$	-	0.4	-	
Saturation Voltage Differential			ΔV_{SAT}		$I_O=0.1\text{A}$	-	10	50	mV
Regulator ($\textcircled{10}$ PIN)	Output Voltage		V_{OH}		$I_H=3\text{mA}$	2.90	3.05	3.20	V
	Load Regulation		$\text{Reg}(V_{OH})$		$I_H=3\sim 15\text{mA}$	-	2	10	mV/mA
	Temperature Coefficient		T_{CVH}		$T_a=0\sim 75^{\circ}\text{C}$	-	6	-	mV/ $^{\circ}\text{C}$
Position Sensing Input	Hysteresis		V_{HYS}			-	2	-	mV
	Offset		$V_H(\text{OFF})$			-5	0	5	mV
	Operating Voltage Range		$\text{CMR}(V_H)$			0.2	-	3	V
Rotation Control Input ($\textcircled{17}$ PIN)	FWD	Operating Voltage	V_{FWD}			3.9	-	V_{CC}	V
		Input Current	I_{FWD}		$V_{FWD}=5\text{V}$, Sink Mode	-	1.5	2.0	mA
	STOP	Operating Voltage	V_{STP}			2.1	2.5	2.8	V
		Operating Voltage	V_{REV}			0	-	0.9	V
	REV	Input Current	I_{REV}		$V_{REV}=0$, Source Mode	-	0.4	0.6	mA
ET Amp ($\textcircled{8}$ PIN)	Operating Voltage Range		$\text{CMR}(\text{ET})$			1.5	2.5	3.5	V
	Gain		G_{ET}		$\textcircled{7}\textcircled{8}$ PIN $\rightarrow$ $\textcircled{6}$ PIN, $V_7=1.5\text{V}$, $V_8=2.5\text{V}$	-	0	-	dB
CS Input ($\textcircled{5}$ PIN)	Gain		G_{CS}		$\textcircled{5}$ PIN $\rightarrow$ $\textcircled{6}$ PIN $V_{CS}=0\sim 15\text{mV}$	30	33	36	dB
	Limitting Voltage		$V_{CS}(\text{lim})$			0.40	0.55	0.70	V
	Limitting Voltage Temperature Coefficient		$T_C(V_{\text{lim}})$			-	0.6	-	mV/ $^{\circ}\text{C}$
Diode Forward Drop			V_F		$I_F=0.7\text{A}$	-	1.3	-	V
Thermal Shut Down Operating Temperature			T_{TSD}			150	160	-	$^{\circ}\text{C}$


TRUTH TABLE

FWD/REV INPUT (17 PIN)	POSITION SENSING INPUT			OUTPUT					
	Ha	Hb	Hc	La (4 PIN)	Lb (3 PIN)	Lc (1 PIN)	la (20 PIN)	lb (19 PIN)	lc (18 PIN)
REV V ₁₇ =0 (Note 2)	H	L	H	OFF	ON	OFF	OFF	OFF	ON
	H	L	L	OFF	ON	OFF	ON	OFF	OFF
	H	H	L	OFF	OFF	ON	ON	OFF	OFF
	L	H	L	OFF	OFF	ON	OFF	ON	OFF
	L	H	H	ON	OFF	OFF	OFF	ON	OFF
	L	L	H	ON	OFF	OFF	OFF	OFF	ON
FWD V ₁₇ =5V (Note 3)	H	L	H	OFF	OFF	ON	OFF	ON	OFF
	H	L	L	ON	OFF	OFF	OFF	ON	OFF
	H	H	L	ON	OFF	OFF	OFF	OFF	ON
	L	H	L	OFF	ON	OFF	OFF	OFF	ON
	L	H	H	OFF	ON	OFF	ON	OFF	OFF
	L	L	H	OFF	OFF	ON	ON	OFF	OFF
STOP V ₁₇ =2.5V (Note 4)	H	L	H	OFF					
	H	L	L						
	H	H	L						
	L	H	L						
	L	H	H						
	L	L	H						


Note 2. This condition is obtained with 17 PIN grounded.


Note 3. This condition is obtained with 17 PIN open.

Note 4. This condition is obtained with 17 PIN ground through 16kΩ resistor.

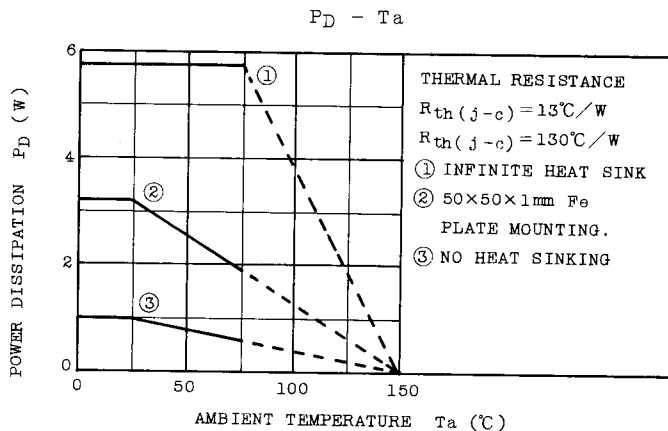

BLOCK DIAGRAM AND BASIC APPLICATION CIRCUIT

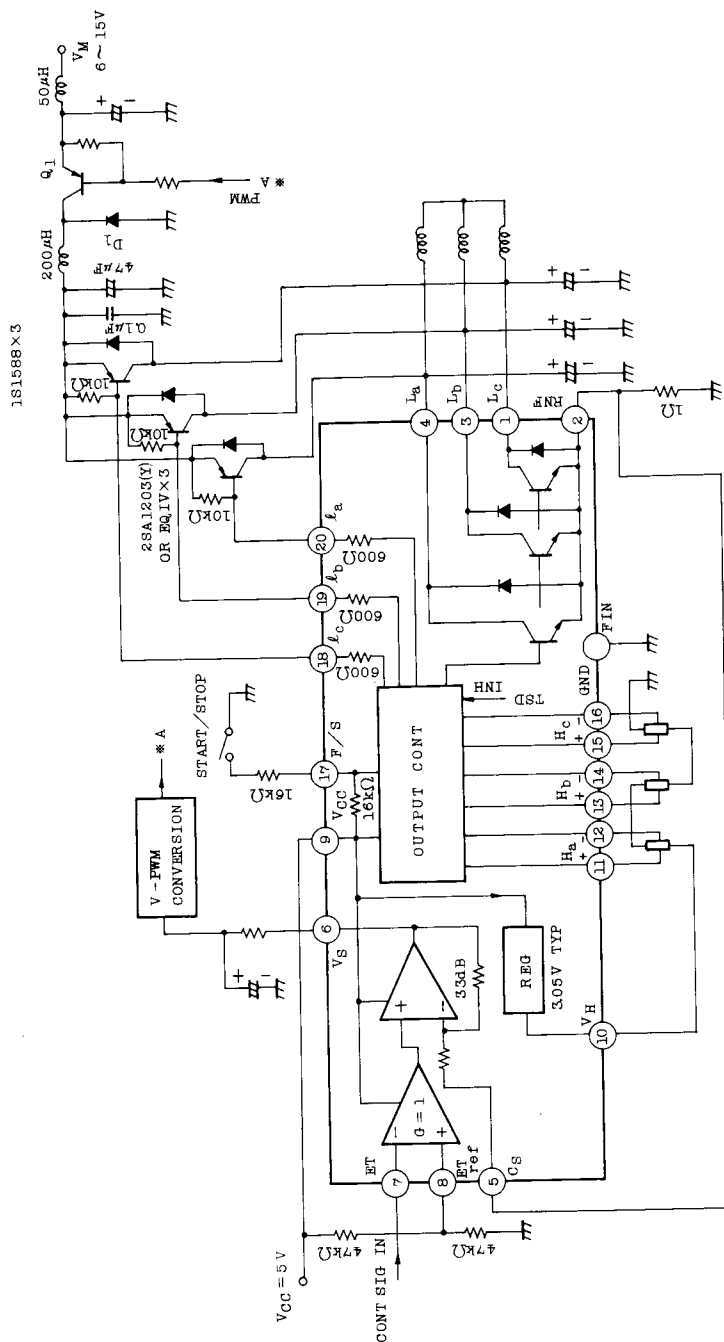

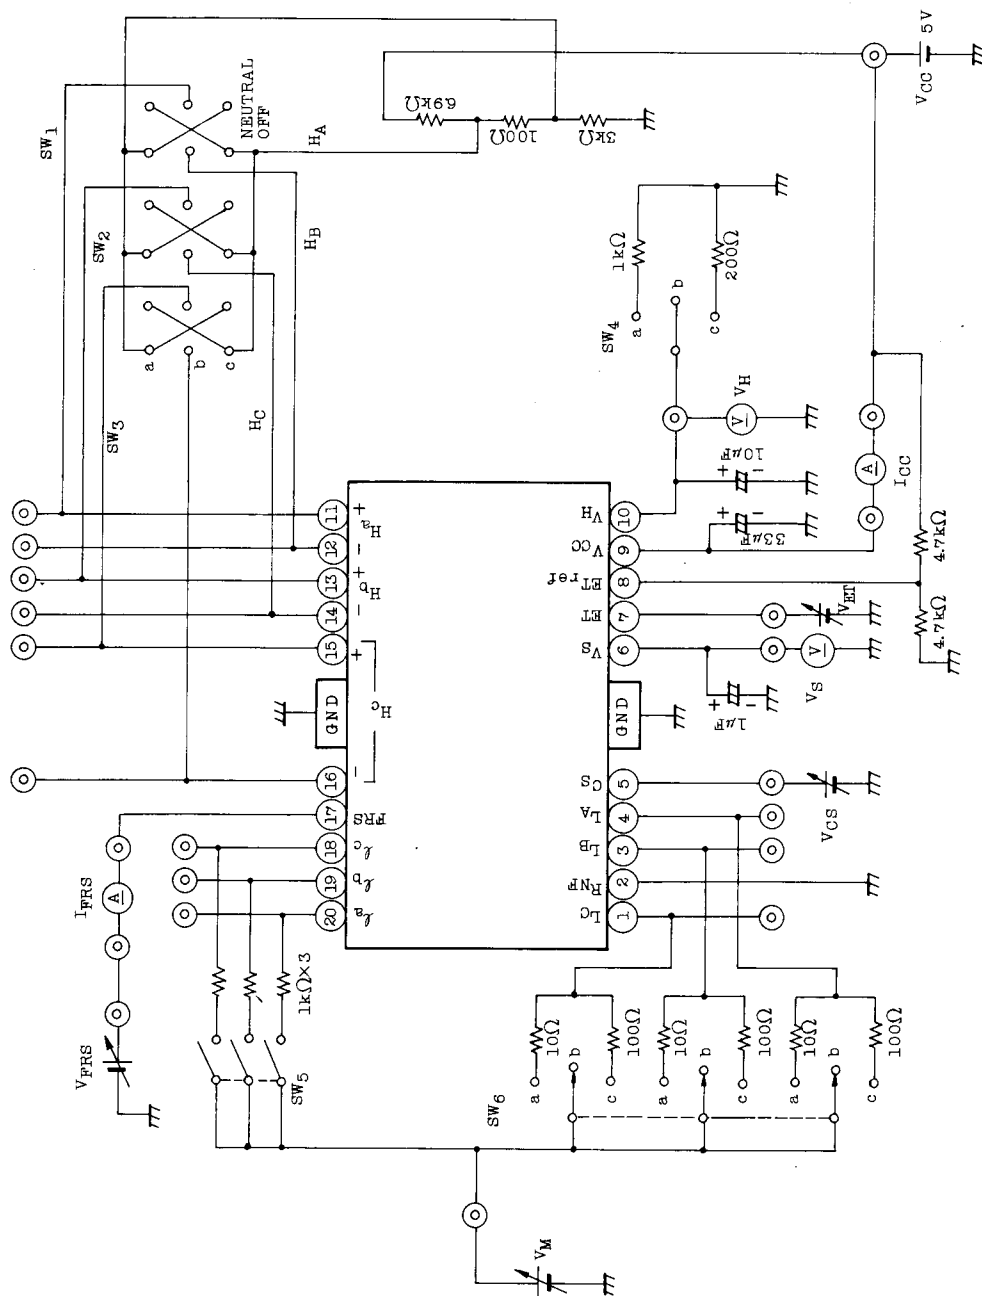







TA8402F




MEASURING METHOD

CHARACTERISTIC	SWITCH						MEASURING METHOD	METER
	1	2	3	4	5	6		
I _{CC1}	b	b	b	b	OFF	b	V _{FRS} =2.5V	I _{CC}
I _{CC2}	a	a	a			b	All position sensing inputs are all shorted and V _{FRS} =5V	I _{CC}
V _{SAT1} V _{SAT2} ΔV _{SAT}	Refer to truth table					c a c	. I _O calibration is required with V _M . . Measure each output to GND voltage. . ΔV _{SAT} is the maximum differential voltage between the highest V _{SAT} value and lowest one.	Measure each output to ground voltage
V _{OH} R _g	b	b	b	a		b	I _H =3mA Reg is load regulation of V _{OH} under the condition of I _H =3~15mA	V _H
V _{FWD} V _{STP} V _{REV} I _{FWD} I _{REV}	Refer to truth table			b	ON	c	V _{FWD} , V _{STP} , V _{REV} are threshold voltages when output change own states. I _{FWD} , I _{REV} are operating input current.	V _{FRS} I _{FRS}
GET	b	b	b	b	OFF	b	GET is a gain of ET Amp. measure V _S differential under the condition of V _{ET} =2.2~2.3V.	V _S
GCS							GCS is a gain of CS Amp. Measure V _S differential under the condition of V _{CS} =0~15mV.	V _S

. Diode Forward Drop

Measure voltage drops between GND and each output under specified condition (I_F=0.7A).

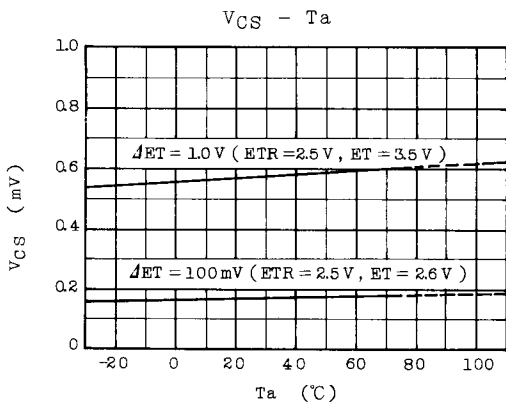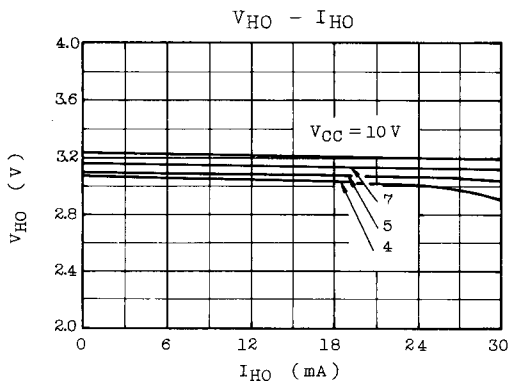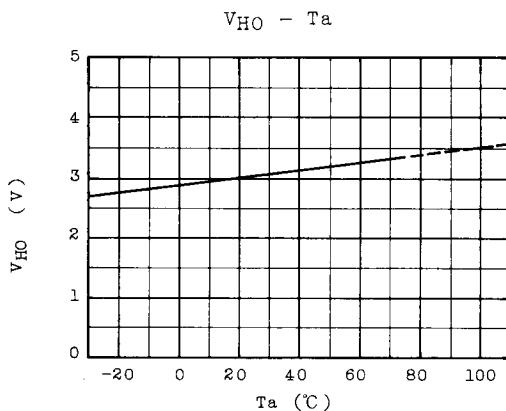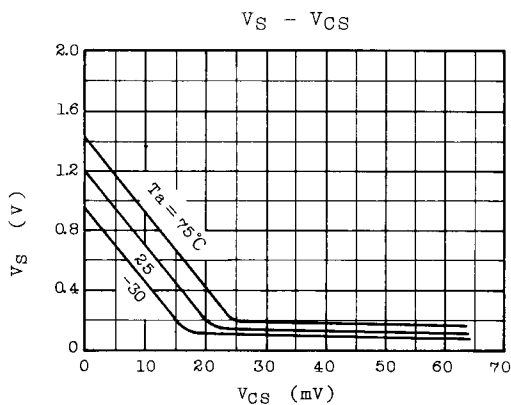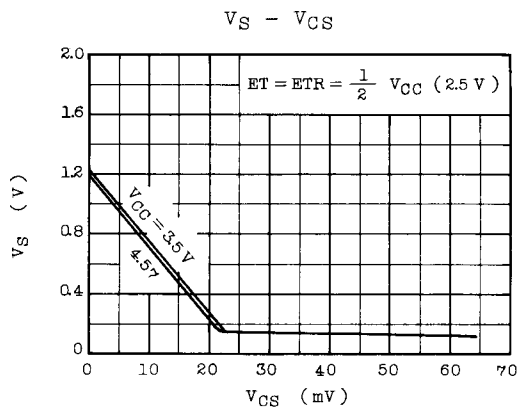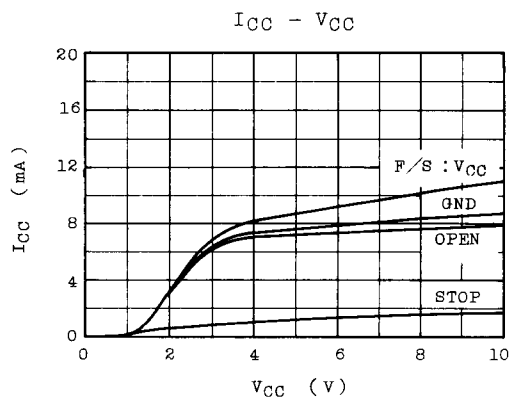

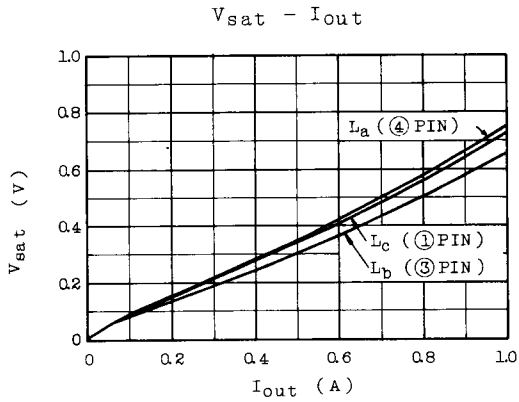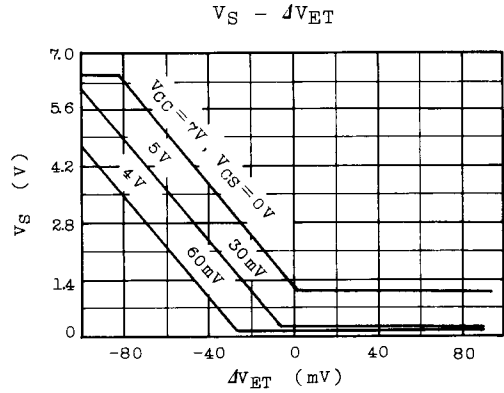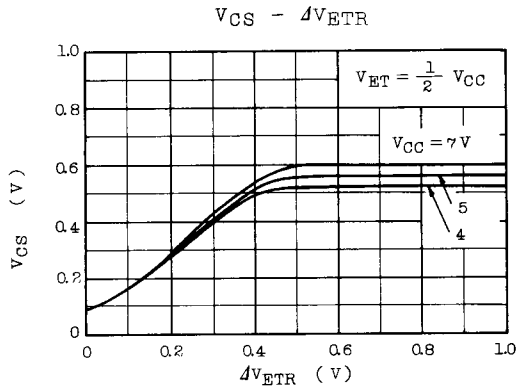

Copyright Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com