


HD10131

Dual D-type Master-Slave Flip Flops

The HD10131 is a dual master-slave type D flip-flop. Asynchronous Set(S) and Reset(R) override Clock(C_C) and Clock Enable(C_E) inputs. Each flip-flop may be clocked separately by holding the common clock in the low state and using the enable inputs for the clocking function. If the common clock is to be used to clock the flip-flop, the Clock Enable inputs must be in the low state. In this case, the enable inputs perform the function of controlling the common clock.

The output states of the flip-flop change on the positive transition of the clock. A change in the information present at the data(D) input will not affect the output information at any other time due to master-slave construction.

PIN ARRANGEMENT



FUNCTION TABLE

R-S

R	S	Q_{n+1}	$\bar{Q}_{n+1}$
L	L	Q_n	$\bar{Q}_n$
L	H	H	L
H	L	L	H
H	H	x	x


x : Not Defined.

Clock

C	D	Q_{n+1}
L	x	Q_n
↑	L	L
↑	H	H

- Notes) 1. Don't Care
2. $C = CE + C_C$
3. A ↑ is a clock transition from a low to a high state.

CIRCUIT SCHEMATIC

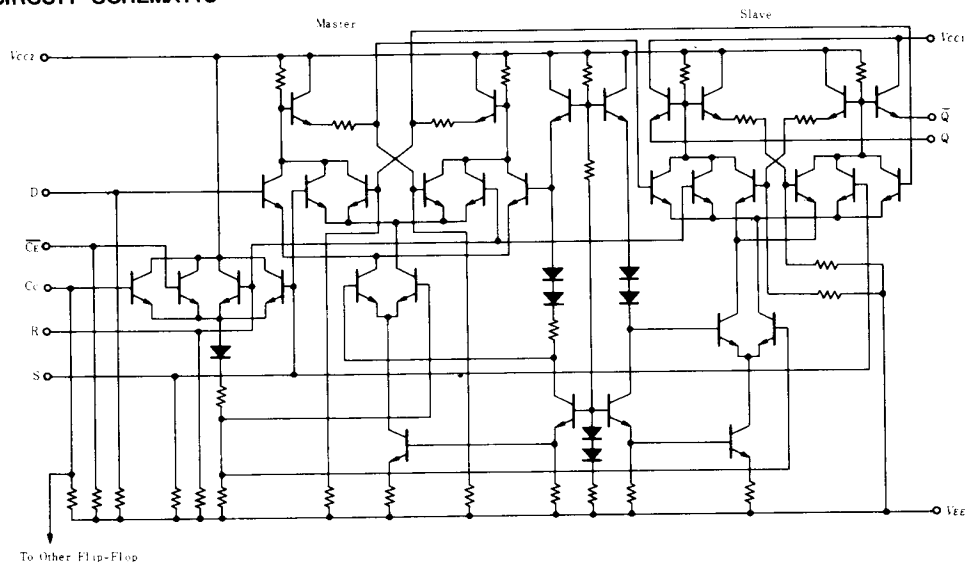

■DC CHARACTERISTICS ($V_{EE} = -5.2V$, $T_a = -30 \sim +85^\circ C$)


Item	Symbol	Test Condition		min	typ	max	Unit
Supply Current	I_{EE}		25°C	—	45	56	mA
Input Current	I_{IH}	$V_{IH} = -0.810V$	R, S	—	—	330	μA
			$\overline{C_E}$	—	—	220	
			D	—	—	245	
			$\overline{C_C}$	—	—	265	
	I_{IL}	$V_{IL} = -1.850V$	25°C	0.5	—	—	μA
Output Voltage	V_{OH}	$V_{IH} = -0.890V$ or $V_{IL} = -1.890V$	-30°C	-1.060	—	-0.890	V
		$V_{IH} = -0.810V$ or $V_{IL} = -1.850V$	25°C	-0.960	—	-0.810	
		$V_{IH} = -0.700V$ or $V_{IL} = -1.825V$	85°C	-0.890	—	-0.700	
	V_{OL}	$V_{IL} = -1.890V$ or $V_{IH} = -0.890V$	-30°C	-1.890	—	-1.675	V
		$V_{IL} = -1.850V$ or $V_{IH} = -0.810V$	25°C	-1.850	—	-1.650	
		$V_{IL} = -1.825V$ or $V_{IH} = -0.700V$	85°C	-1.825	—	-1.615	
Output Threshold Voltage	V_{ONA}	$V_{INA} = -1.205V$ or $V_{ILA} = -1.500V$	-30°C	-1.080	—	—	V
		$V_{INA} = -1.105V$ or $V_{ILA} = -1.475V$	25°C	-0.980	—	—	
		$V_{INA} = -1.035V$ or $V_{ILA} = -1.440V$	85°C	-0.910	—	—	
	V_{OLA}	$V_{ILA} = -1.500V$ or $V_{INA} = -1.205V$	-30°C	—	—	-1.655	V
		$V_{ILA} = -1.475V$ or $V_{INA} = -1.105V$	25°C	—	—	-1.630	
		$V_{ILA} = -1.440V$ or $V_{INA} = -1.035V$	85°C	—	—	-1.595	

■AC CHARACTERISTICS ($V_{EE} = -3.2V$, $V_{CC} = +2.0V$, $T_a = -30 \sim +85^\circ C$)



Item	Symbol	Input	Output	Test Condition	min	typ	max	Unit	
Propagation Delay Time	t_{PLH}	$C_C, \overline{C_E}$	$Q, \overline{Q}$	$R_L = 50\Omega$	-30°C	1.4	—	4.6	ns
					25°C	1.5	3.0	4.5	
					85°C	1.5	—	5.0	
	t_{PHL}	$C_C, \overline{C_E}$	$Q, \overline{Q}$		-30°C	1.4	—	4.6	ns
					25°C	1.5	3.0	4.5	
					85°C	1.5	—	5.0	
	t_{PLH}	R, S	$Q, \overline{Q}$		-30°C	1.1	—	4.4	ns
					25°C	1.2	2.8	4.3	
					85°C	1.2	—	4.8	
	t_{PHL}	R, S	$Q, \overline{Q}$		-30°C	1.1	—	4.4	ns
					25°C	1.2	2.8	4.3	
					85°C	1.2	—	4.8	
Rise/Fall Time	t_{TLH}		$Q, \overline{Q}$	-30°C	1.0	—	4.6	ns	
				25°C	1.1	2.5	4.5		
				85°C	1.1	—	4.9		
	t_{THL}			-30°C	1.0	—	4.6	ns	
				25°C	1.1	2.5	4.5		
				85°C	1.1	—	4.9		
Setup Time	t_{su}	$\overline{C_E}, D$	$Q, \overline{Q}$	25°C	—	—	2.5	ns	
Hold Time	t_h	$\overline{C_E}, D$	$Q, \overline{Q}$	25°C	—	—	1.5	ns	
Max. Toggle Frequency	f_{TW}	$\overline{C_E}$	$Q, \overline{Q}$	-30°C	125	—	—	MHz	
				25°C	125	160	—		
				85°C	125	—	—		

■ AC CHARACTERISTIC TEST CIRCUITS

1. Toggle Frequency

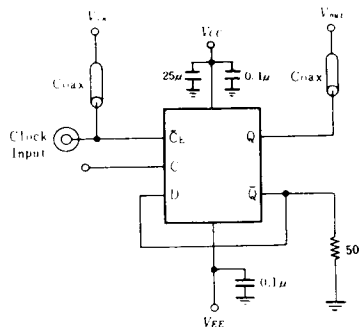

2. Switching Time

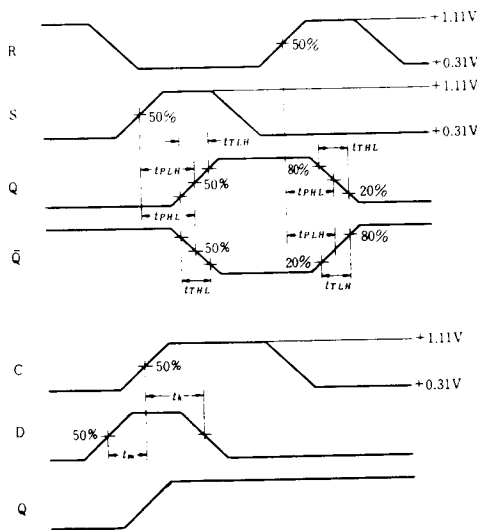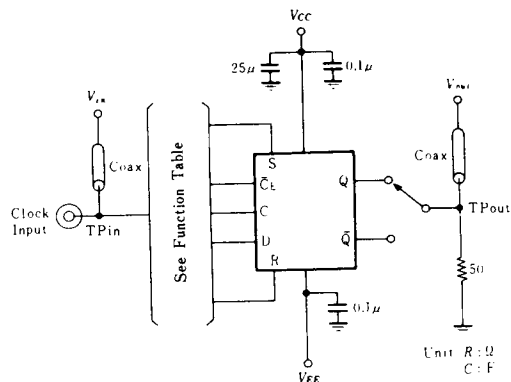

- Notes)
1. 50Ω termination to ground located in each scope channel input. All input and output cables to the scope are equal lengths of 50Ω coaxial cable.
 2. Wire length should be <6.35mm (1/4 inch) from TPin to input pin and TPout to output pin.
 3. t_{su} is the minimum time before the positive transition of the clock pulse that information must be present at the data.
 4. t_h is the minimum time after the positive transition unchanged at the data.