

Mark: 3R

PNP Switching Transistor

This device is designed for very high speed saturated switching at collector currents to 100 mA. Sourced from Process 65. See PN4258 for characteristics.

Absolute Maximum Ratings* TA = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V _{CEO}	Collector-Emitter Voltage	15	V
V _{CBO}	Collector-Base Voltage	15	V
V _{EBO}	Emitter-Base Voltage	4.5	V
l _c	Collector Current - Continuous	200	mA
T _J , T _{stg}	Operating and Storage Junction Temperature Range	-55 to +150	°C

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:

1) These ratings are based on a maximum junction temperature of 150 degrees C.

2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.
 3) All voltages (V) and currents (A) are negative polarity for PNP transistors.

Thermal Characteristics TA = 25°C unless otherwise noted

Symbol	Characteristic	Мах		Units
		2N5771	*MMBT5771	
P _D	Total Device Dissipation	350	225	mW
	Derate above 25°C	2.8	1.8	mW/∘C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	125		°C/W
$R_{ ext{ hetaJA}}$	Thermal Resistance, Junction to Ambient	357	556	°C/W

*Device mounted on FR-4 PCB 1.6" X 1.6" X 0.06."

© 1997 Fairchild Semiconductor Corporation

PNP Switching Transistor (continued)

ACTERISTICS Collector-Emitter Breakdown Voltage*	$I_{\rm C} = 3.0$ mA, $I_{\rm B} = 0$			
Collector-Emitter Breakdown Voltage*	L = 30 m A L = 0			
	$1_{\rm C} = 3.0$ [I]A. $1_{\rm B} = 0$	15	1	V
Collector-Emitter Breakdown Voltage	$I_{\rm C} = 100 \mu\text{A}, V_{\rm BE} = 0$	15		V
Collector-Base Breakdown Voltage	$I_{\rm C} = 100 \mu{\rm A}, I_{\rm E} = 0$	15		V
Emitter-Base Breakdown Voltage	$I_{\rm E} = 100 \mu{\rm A}, I_{\rm C} = 0$	4.5		V
	-		10	nA
				nA
			-	μA
Emitter Cutoff Current	$V_{EB} = 4.5 \text{ V}, I_{C} = 0$		1.0	μΑ
DC Current Gain	$I_{C} = 1.0 \text{ mA}, V_{CE} = 0.5 \text{ V}$ $I_{C} = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ $I_{C} = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}, T_{A} = -55^{\circ}\text{C}$ $I_{C} = 50 \text{ mA}, V_{CE} = 1.0 \text{ V}$	35 50 20 40	120	
Collector-Emitter Saturation Voltage	$I_{\rm C} = 1.0 \text{ mA}, I_{\rm B} = 0.1 \text{ mA}$		0.15	V
	$I_{\rm C} = 10$ mA, $I_{\rm B} = 1.0$ mA		0.18	V
Page Emitter Seturation Voltage				V V
Dase-Emilier Saturation Voltage		0.75		v
	$I_{\rm C} = 50 \text{ mA}, I_{\rm B} = 5.0 \text{ mA}$		1.5	V
NAL CHARACTERISTICS	$V_{CB} = 5.0 \text{ V}, I_{E} = 0,$		3.0	pF
-	f = 140 kHz			
Emitter-Base Capacitance			3.5	pF
Small-Signal Current Gain	I = 140 KHZ $I_{C} = 10 \text{ mA}, V_{CE} = 10 \text{ V},$ f = 100 MHz	8.5		MHz
GCHARACTERISTICS				
Storage Time			20	ns
Turn-On Time	$I_{C} = 10 \text{ mA}, V_{CC} = 1.5 \text{ V},$ $I_{B} = 1.0 \text{ mA}$		15	ns
Turn-Off Time	$I_{C} = 10 \text{ mA}, V_{CC} = 1.5 \text{ V},$ $I_{B1} = I_{B2} = 1.0 \text{ mA}$		20	ns
	Collector Cutoff Current Collector Cutoff Current Emitter Cutoff Current CTERISTICS* DC Current Gain Collector-Emitter Saturation Voltage Base-Emitter Saturation Voltage NAL CHARACTERISTICS Collector-Base Capacitance Emitter-Base Capacitance Small-Signal Current Gain CCHARACTERISTICS Storage Time Turn-On Time	Collector Cutoff Current $V_{CB} = 8.0 \text{ V}, I_E = 0$ Collector Cutoff Current $V_{CE} = 8.0 \text{ V}, V_{BE} = 0, T_A = 125^{\circ}\text{C}$ Emitter Cutoff Current $V_{EB} = 4.5 \text{ V}, I_C = 0$ CTERISTICS*DC Current Gain $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}, I_C = 50 \text{ mA}, V_{CE} = 1.0 \text{ V}$ Collector-Emitter Saturation Voltage $I_C = 10 \text{ mA}, I_B = 0.1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 1.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ Base-Emitter Saturation Voltage $I_C = 10 \text{ mA}, I_B = 1.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 10 \text{ mA}, I_B = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CC} = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CC} = 10 \text{ V}, f = 100 \text{ MHz}$ Schape Capacitance $V_{BE} = 0.5 \text{ V}, I_C = 0, f = 140 \text{ kHz}$ Small-Signal Current Gain $I_C = 10 \text{ mA}, V_{CC} = 10 \text{ V}, f = 100 \text{ MHz}$ Storage Time $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_B = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_B = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_B = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_B = 1.0 \text{ mA}$ <td< td=""><td>Collector Cutoff Current$V_{CB} = 8.0 \text{ V}, I_E = 0$Collector Cutoff Current$V_{CE} = 8.0 \text{ V}, V_{BE} = 0$$V_{CE} = 8.0 \text{ V}, V_{BE} = 0, T_A = 125^{\circ}\text{C}$Emitter Cutoff Current$V_{EB} = 4.5 \text{ V}, I_C = 0$CTERISTICS*DC Current Gain$I_C = 1.0 \text{ mA}, V_{CE} = 0.3 \text{ V}$$I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$$I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$$I_C = 50 \text{ mA}, V_{CE} = 1.0 \text{ V}$40Collector-Emitter Saturation Voltage$I_C = 10 \text{ mA}, I_B = 0.1 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 1.0 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 1.0 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$$I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$$I_C = 50 \text{ mA}, V_{CE} = 1.0 \text{ mA}$$I_C = 10 \text{ mA}, V_{CE} = 1.0 \text{ mA}$$I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}, f = 140 \text{ kHz}$Emitter-Base Capacitance$V_{BE} = 0.5 \text{ V}, I_C = 0, f = 140 \text{ kHz}$Small-Signal Current Gain$I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$Storage Time$I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_{B1} = I_{B2} = 1.0 \text{ mA}$$I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_{B1} = I_{D2} \text{ mA}$</td><td>Collector Cutoff Current $V_{CB} = 8.0 \text{ V}, I_E = 0$ 10 Collector Cutoff Current $V_{CE} = 8.0 \text{ V}, V_{BE} = 0$ 10 Collector Cutoff Current $V_{CE} = 8.0 \text{ V}, V_{BE} = 0, T_A = 125^{\circ}\text{C}$ 5.0 Emitter Cutoff Current $V_{EB} = 4.5 \text{ V}, I_C = 0$ 1.0 CTERISTICS* DC Current Gain $I_C = 1.0 \text{ mA}, V_{CE} = 0.3 \text{ V}$ 35 DC Current Gain $I_C = 1.0 \text{ mA}, V_{CE} = 0.3 \text{ V}$ 50 120 $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ 50 120 10 Collector-Emitter Saturation Voltage $I_C = 1.0 \text{ mA}, I_B = 0.1 \text{ mA}$ 0.15 0.18 $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ 0.6 0.8 0.6 0.8 Base-Emitter Saturation Voltage $I_C = 1.0 \text{ mA}, I_B = 1.0 \text{ mA}$ 0.75 0.95 $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ 0.75 0.95 1.5 NAL CHARACTERISTICS Collector-Base Capacitance $V_{CB} = 0.5 \text{ V}, I_C = 0,$ 3.0 1.5 Small-Signal Current Gain $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V},$ 8.5 1.5 Storage Time $I_C = 10 \text{ mA}, V_{CC} = 1.5 V$</td></td<>	Collector Cutoff Current $V_{CB} = 8.0 \text{ V}, I_E = 0$ Collector Cutoff Current $V_{CE} = 8.0 \text{ V}, V_{BE} = 0$ $V_{CE} = 8.0 \text{ V}, V_{BE} = 0, T_A = 125^{\circ}\text{C}$ Emitter Cutoff Current $V_{EB} = 4.5 \text{ V}, I_C = 0$ CTERISTICS*DC Current Gain $I_C = 1.0 \text{ mA}, V_{CE} = 0.3 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ $I_C = 50 \text{ mA}, V_{CE} = 1.0 \text{ V}$ 40Collector-Emitter Saturation Voltage $I_C = 10 \text{ mA}, I_B = 0.1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 1.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 1.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 0.1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ $I_C = 50 \text{ mA}, V_{CE} = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CE} = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}, f = 140 \text{ kHz}$ Emitter-Base Capacitance $V_{BE} = 0.5 \text{ V}, I_C = 0, f = 140 \text{ kHz}$ Small-Signal Current Gain $I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$ Storage Time $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_{B1} = I_{B2} = 1.0 \text{ mA}$ $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V}, I_{B1} = I_{D2} \text{ mA}$	Collector Cutoff Current $V_{CB} = 8.0 \text{ V}, I_E = 0$ 10 Collector Cutoff Current $V_{CE} = 8.0 \text{ V}, V_{BE} = 0$ 10 Collector Cutoff Current $V_{CE} = 8.0 \text{ V}, V_{BE} = 0, T_A = 125^{\circ}\text{C}$ 5.0 Emitter Cutoff Current $V_{EB} = 4.5 \text{ V}, I_C = 0$ 1.0 CTERISTICS* DC Current Gain $I_C = 1.0 \text{ mA}, V_{CE} = 0.3 \text{ V}$ 35 DC Current Gain $I_C = 1.0 \text{ mA}, V_{CE} = 0.3 \text{ V}$ 50 120 $I_C = 10 \text{ mA}, V_{CE} = 0.3 \text{ V}$ 50 120 10 Collector-Emitter Saturation Voltage $I_C = 1.0 \text{ mA}, I_B = 0.1 \text{ mA}$ 0.15 0.18 $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ 0.6 0.8 0.6 0.8 Base-Emitter Saturation Voltage $I_C = 1.0 \text{ mA}, I_B = 1.0 \text{ mA}$ 0.75 0.95 $I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$ 0.75 0.95 1.5 NAL CHARACTERISTICS Collector-Base Capacitance $V_{CB} = 0.5 \text{ V}, I_C = 0,$ 3.0 1.5 Small-Signal Current Gain $I_C = 10 \text{ mA}, V_{CC} = 1.5 \text{ V},$ 8.5 1.5 Storage Time $I_C = 10 \text{ mA}, V_{CC} = 1.5 V$

2N5771 / MMBT5771



©2001 Fairchild Semiconductor Corporation


March 2001, Rev. B1





July 1999, Rev. A



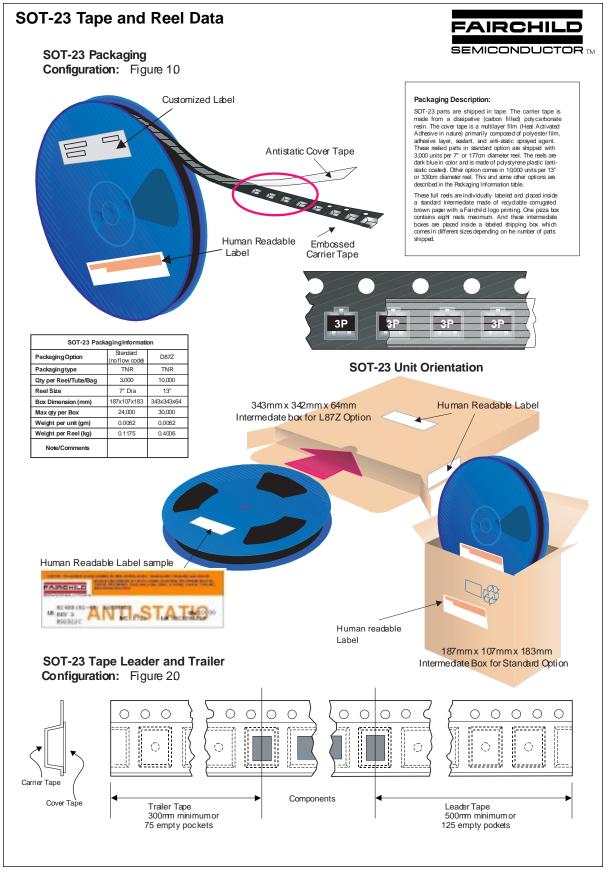


©2000 Fairchild Semiconductor International

September 1999, Rev. C



September 1999, Rev. C

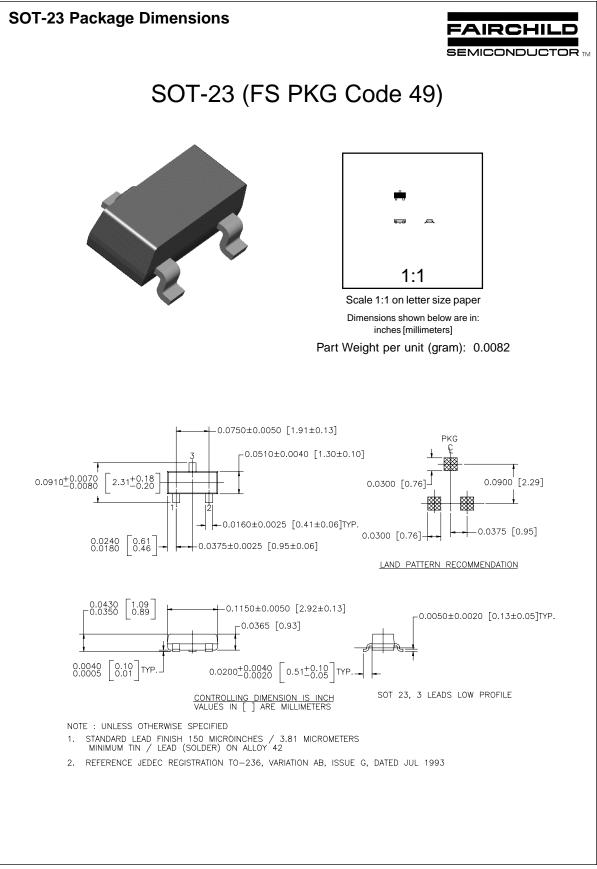

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™ Bottomless™ CoolFET™ CROSSVOLT™ DOME™ E²CMOS[™] EnSigna™ FACT™ FACT Quiet Series[™] FAST[®]

FASTr™ GlobalOptoisolator™ GTO™ HiSeC™ **ISOPLANAR™** MICROWIRE™ OPTOLOGIC™ **OPTOPLANAR™** PACMAN™ POP™

PowerTrench[®] QFET™ QS™ QT Optoelectronics[™] Quiet Series[™] SILENT SWITCHER® SMART START™ SuperSOT[™]-3 SuperSOT[™]-6 SuperSOT[™]-8

SyncFET™ TinyLogic™ UHC™ VCX™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.
	1	Rev G

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.