


VKQ100MS3V3

100 Watt, 3.3Vout, Quarter Brick DC/DC Converter

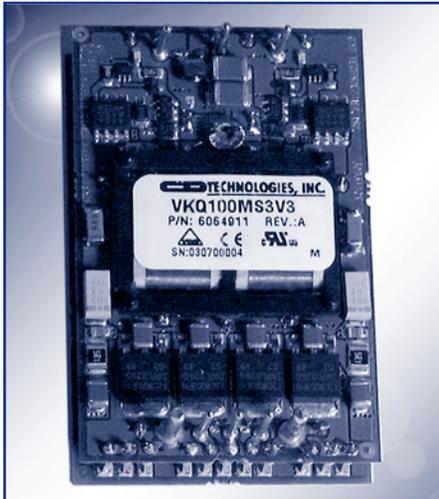

FEATURES

- 36 - 75V Input Range
- Small Size: 1.5" x 2.3" x .50"
- High Efficiency: 84%
- Fixed Frequency Operation 480kHz
- Primary Remote On/Off
- Adjustable Output Voltage
- Brick Wall Current Limiting
- On Board Input Differential Filter
- No Minimum Load Requirement
- Remote Sense

- No Heatsink Required
- No External Components Required
- Safety per UL/CUL 60950, EN 60950, Operational Insulation Meets TNV-SELV Isolation Requirements

APPLICATIONS

- Distributed Power Architectures
- Telecommunications
- Battery Powered Systems
- Workstations

The VKQ100MS3V3 DC/DC converter presents an economical and practical solution for distributed power system architectures which require high power density and efficiency while maintaining system modularity and upgradeability. With the ability to operate over a wide input voltage range of 36 to 75 Vdc, this module is ideal for telecommunications and battery backup applications where input flexibility must

be combined with output voltage regulation. In addition, the output is fully isolated from the input, allowing for a variety of polarity and grounding configurations.

Innovative circuit design using surface mount components results in a compact, efficient and reliable solution to DC/DC conversion needs. Internal power dissipation is minimized by the VKQ100MS3V3's high efficiency and is

aided by a metal baseplate to which all heat dissipative elements are coupled.

The control circuitry of the VKQ100MS3V3 has been designed to provide overvoltage protection as well as current limiting for continuous short-circuit protection. The VKQ100MS3V3 is operation specified from rated load to zero load.

PRODUCT SELECTION CHART

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	RATED OUTPUT CURRENT (A)	INPUT CURRENT NOM (A)	EFFICIENCY	
					MIN (%)	TYP (%)
VKQ100MS3V3	48	3.3	30	2.50	83	84

ORDERING INFORMATION

MODEL NO.	PART NO.
VKQ100MS3V3	6064911

ABSOLUTE MAX. RATINGS

Output Short-Circuit Duration	Continuous
Internal Power Dissipation	20.5 Watts
Lead Temperature (soldering, 10 seconds max)	+300°C
Continuous Input Voltage	75 VDC
Storage Temperature	+125°C
Input to Output Isolation	1500 VDC
Input Voltage (non-operating)	100 VDC

SPECIFICATIONS

Unless otherwise specified, all specifications are at $T_A = +25^\circ\text{C}$.


	PARAMETER	CONDITIONS	MIN	NOM	MAX	UNITS	
INPUT	Voltage Range (Vin)		36	48	75	Vdc	
	Reflected Ripple Current ₁	Vin = 48 Vdc; Io = 30 A.			4	A pk-pk	
	Input Ripple Rejection (100 Hz – 1KHz)	Vin = 48 Vdc; Io = 30 A.	-30			dB	
	No Load Input Current	Vin = 48 Vdc; Io = 0 A.		90	100	mA	
	Quiescent Input Current Primary On/Off Disabled	Vin = 48 Vdc; Io = 30 A.			4	mA	
	Power Dissipation No Load	Vin = 48 Vdc.		4.40	4.80	W	
	Standby, Primary On/Off Disabled				0.20	W	
	Maximum Input Current	Vin = 36 Vdc; Io = 30 A.			3.40	A	
	Inrush Charge	Vin = 75 Vdc.			0.165	mC	
	Input Under Voltage Protection	Tamb = -40°C to +60°C; Io = 0 A to 30 A					
	Shut down		31.50		32.50	Vdc	
	Turn On		32.50		33.70	Vdc	
	Input Over Voltage Protection	Tamb = -40°C to +60°C; Io = 0 A to 30 A					
	Shut down		76.50		79.00	Vdc	
	Turn On		76.00		78.00	Vdc	
	Input Under Voltage Protection Shutdown	Tamb = +25°C; Io = 0A to 30A	32.00		32.25	Vdc	
	Turn On		33.00		33.50	Vdc	
	Input Over Voltage Protection	Tamb = -40°C to +60°C; Io = 0 A to 30 A					
	Shut down		77.70		79.00	Vdc	
	Turn On		76.20		77.60	Vdc	
OUTPUT	OUTPUT						
	Nominal Voltage (Vnom)			3.300		Vdc	
	Output Current (Io) ₂	Vin = 36 Vdc to 75 Vdc.	0		30	A	
	Rated Power ₂	Vin = 36 Vdc to 75 Vdc.	0		100	W	
	Set Point Accuracy	Vin = 48 Vdc; Io = 15 A; Tamb = -40°C to +60°C. Tamb = +25°C			1 0.50	% of Vnom % of Vnom	
	Line Regulation	Vin = 36 Vdc to 75 Vdc; Tamb = -40°C to +60°C; Io = 30 A. Tamb = +25°C		0.02 0.01	0.075 0.05	% of Vnom % of Vnom	
	Load Regulation	Vin = 36 Vdc to 75 Vdc; Io = 0 A to 30 A. Tamb = -40°C to +60°C; Tamb = +25°C; Vin = 48Vdc		0.50 0.10	0.75 0.25	% of Vnom % of Vnom	
	Ripple & Noise ₃	Vin = 36-75 Vdc; Io = 0-30 A; TA = -40°C to +60°C f < 20 MHz Bandwidth.			90	mV pk-pk	
	Temperature Drift	Tamb = -40°C to +60°C; Vin = 48 Vdc; Io = 30 A.		0.005	0.01	%/°C	
	Current Limit Inception	Vin = 48 Vdc.	32		36	A	
	Output Voltage Adjust Range	Vin = 48 Vdc; Io = 0-30 A	-10		+10	%Vnom	
	Short Circuit Current	Vin = 48 Vdc.	30		44	A	
	Turn – On Time	Vin = 48 Vdc; Io = 0-30 A Output to within 1% of Vnom		1.00	1.40	ms	
	Over Voltage Protection Set Point	Vin = 48 Vdc; Io = 30 A.	4.40		4.60	Vdc	
	Transient Response	50% to 100% Load Step to di/dt = 75A/μS; Co = 1000μF; Vin = 48Vdc					
	Peak Deviation				250	mV	
	Settling Time				120	μS	
	GENERAL	GENERAL					
		Efficiency ₄	Vin = 48 Vdc; Io = 30 A.	83			%
		Switching Frequency	Vin = 36 Vdc-75 Vdc; Io = 0-30 A	460	480	500	KHz
Remote Sense Compensation		Vin = 48 Vdc			0.300	Vdc	
Remote On / Off Control Inputs		Vin = 36 Vdc-48 Vdc; Io = 0-30 A Tamb = -40°C to +60°C					
Primary Sink Current – Logic Low			0.60		1.60	mA	
Vlow				0.70	0.75	Vdc	
Vhigh			N/A	N/A	N/A	Open Collector	
Calculated MTTF Per Telcordia TR-NWT-000332		Vin = 48 Vdc; Io = 30 A	TBD			Hours	
Per MIL-HDBK217E			TBD			Hours	
Operating Ambient Temperature		-40		+70	°C		

SPECIFICATIONS Unless otherwise specified, all specifications are at $T_A = +25^\circ\text{C}$.

ISOLATION	PARAMETER	CONDITIONS	MIN	NOM	MAX	UNITS	
	ISOLATION						
	Input to Output		1500			Vdc	
	Input to Base Plate		1500			Vdc	
	Output to Base Plate		500			Vdc	
	Resistance	Input to Output	10			$\text{M}\Omega$	
	Capacitance	Input to Output		2000		pF	
Leakage Current	$V(\text{input} - \text{output}) = 240 \text{ Vac}, 60 \text{ Hz}$			180	$\mu\text{A}, \text{rms}$		

- Notes:**
1. Refer to figure 1 (measurement per "B") in Application Note DCAN-53 for details on the measurement technique used to measure the reflected ripple current.
 2. Refer to the performance curves section for details on Output Current Derating with Ambient Temperature. Also refer to figure 10 in the Application Note DCAN-53 for details on air flow characterization.
 3. Refer to figure 7 in Application Note DCAN-53 for details on measurement set up for output ripple and noise. Also refer to performance curves section for variation in output ripple and noise with Ambient Temperature, Input Voltage and Output Current. The unit requires a ceramic capacitor of $0.022\mu\text{F}$ across measurement terminals.
 4. Refer to performance curves section for variation in efficiency against Input Voltage, Ambient Temperature, Output Load and Frequency.

MECHANICAL

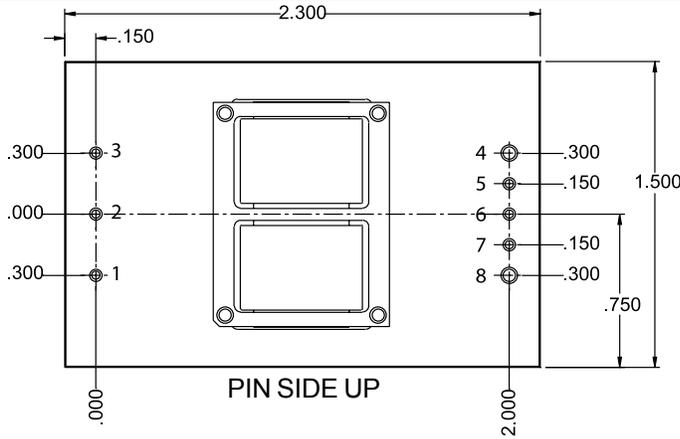


VKQ100MS3V3 (6064911)

PIN ASSIGNMENT


No.	Function
1	+Vin
2	On/Off
3	-Vin
4	-Vout
5	-Sense
6	Trim
7	+Sense
8	+Vout

NOTES:

General Tolerance: $+0.20$
 Pin Location Tolerance: $+0.010$
 Unit Weight: 34g / 1.2oz.
 PIN MATERIAL: COPPER
 PIN FINISH: TIN-LEAD

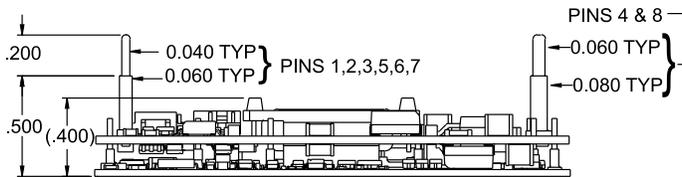


POWER DERATING CURVE ($V_{in} = 36\text{Vdc} - 75\text{Vdc}$)

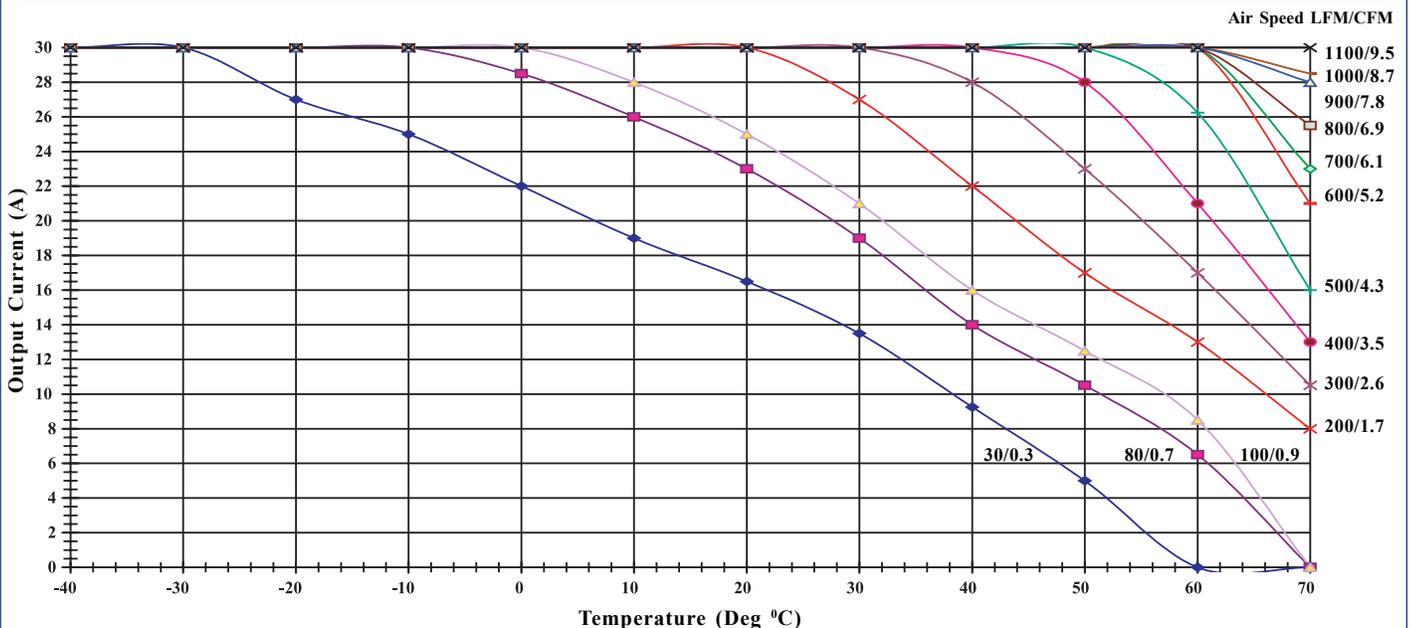


TYPICAL PERFORMANCE CURVES


EFFICIENCY (%) vs. OUTPUT CURRENT (A) @ $T_A +25^{\circ}\text{C}$; $V_{in} = 48\text{Vdc}$

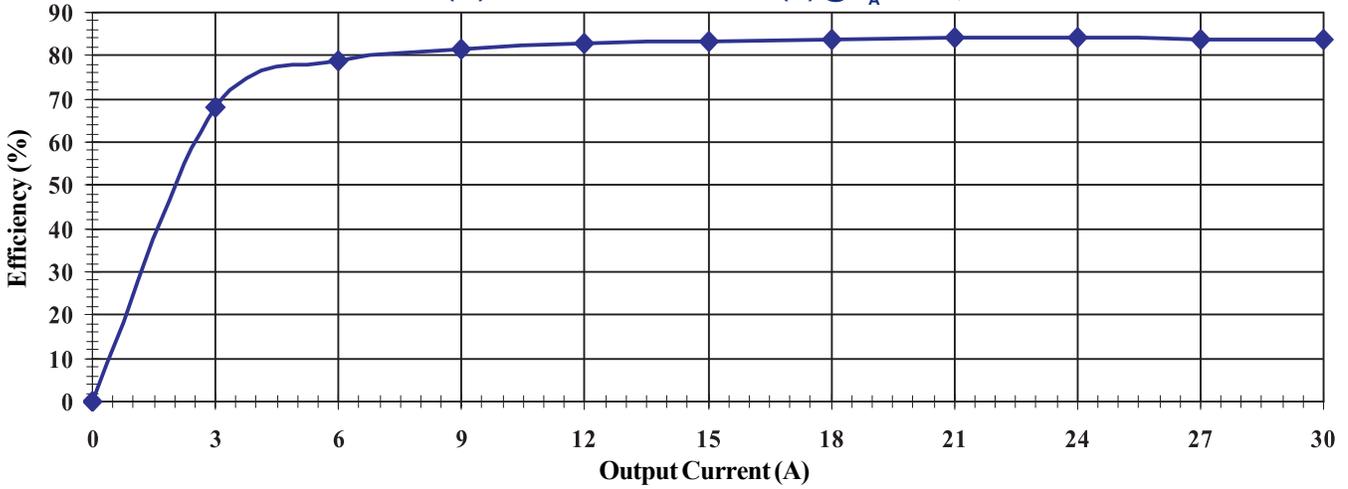




EFFICIENCY (%) vs. INPUT VOLTAGE @ $T_A +25^{\circ}\text{C}$; $I_o = 30\text{A}$

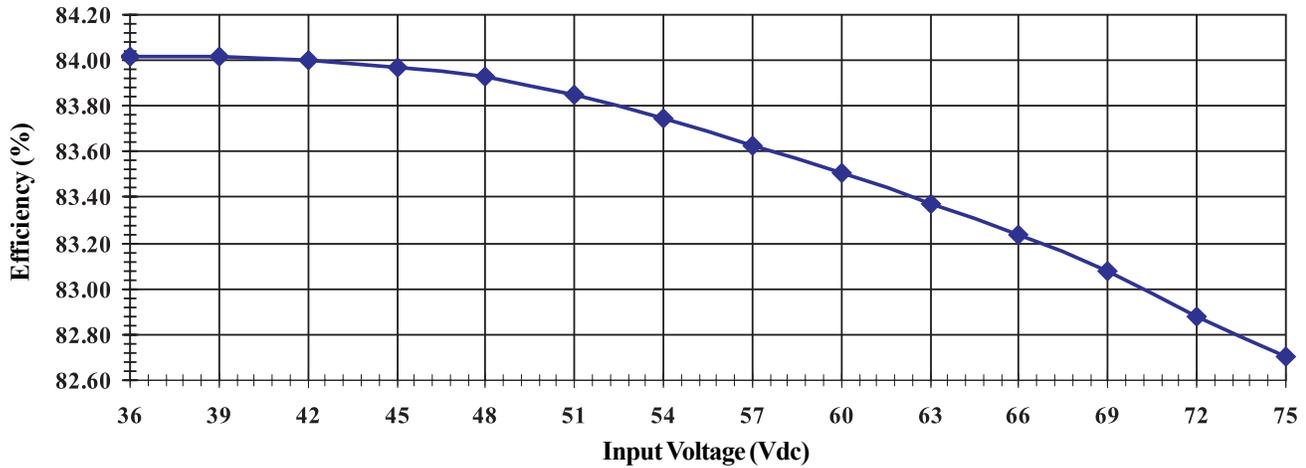

EFFICIENCY (%) vs. AMBIENT TEMP. ($^{\circ}\text{C}$) @ $V_{in} = 48\text{Vdc}$; $I_o = 30\text{A}$

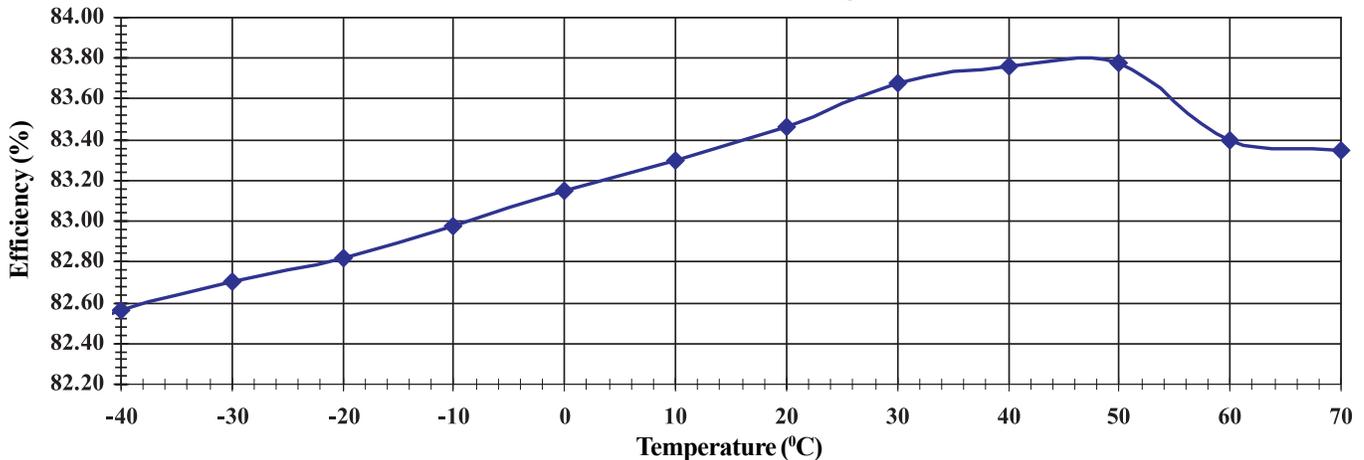

TYPICAL PERFORMANCE CURVES

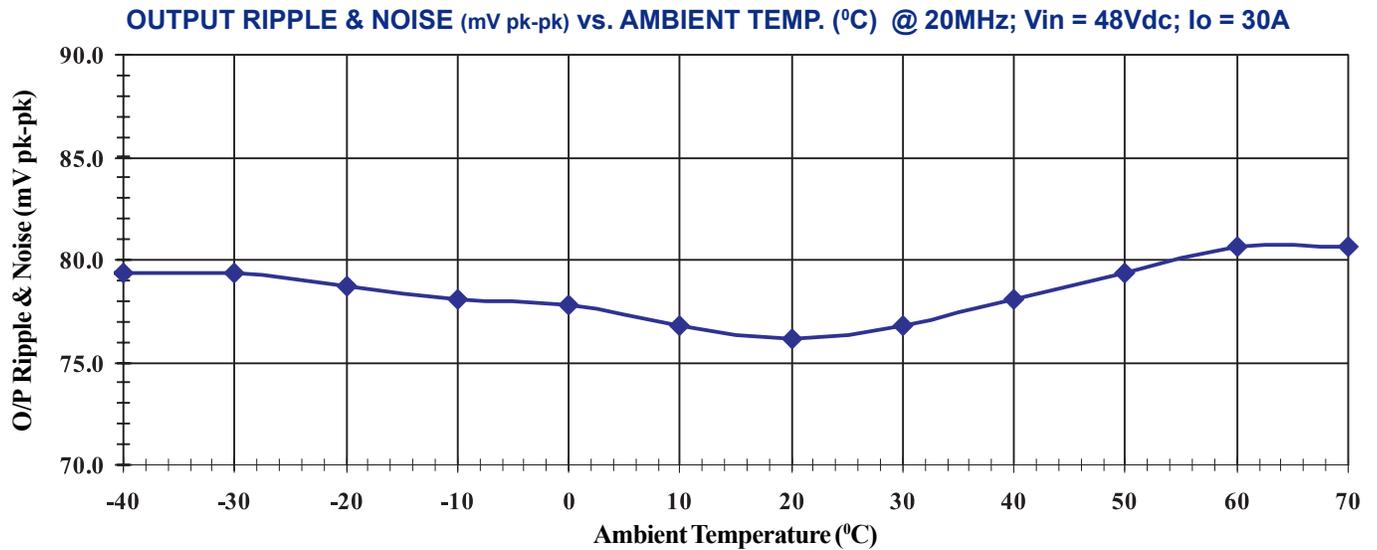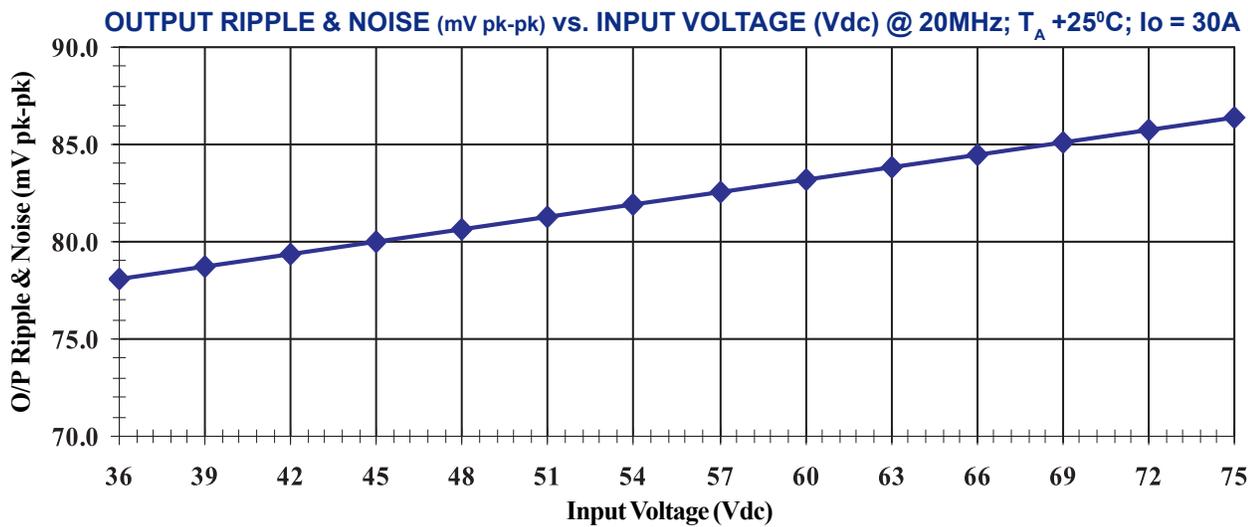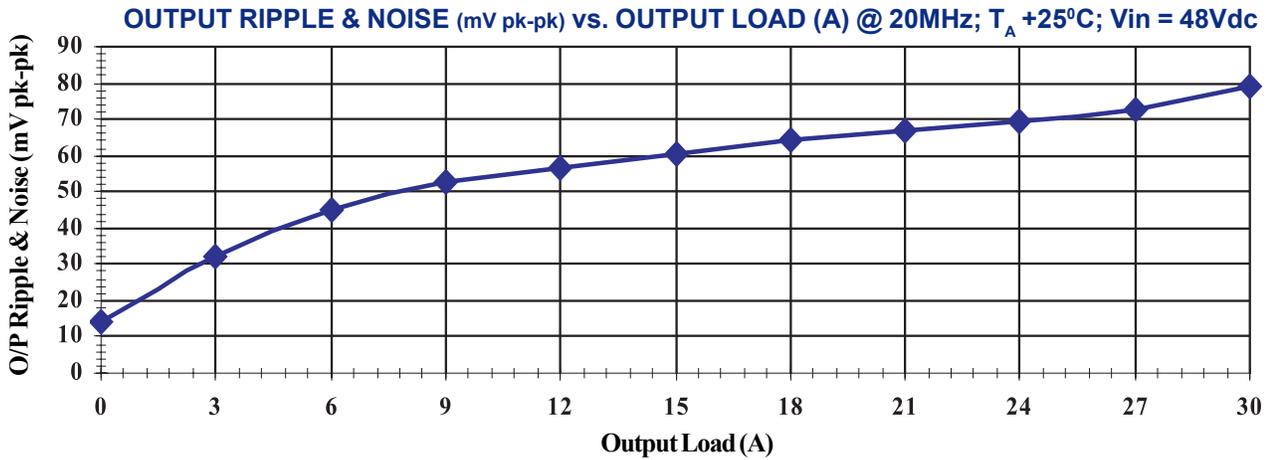

Power Electronics Division, Americas
 3400 E Britannia Drive, Tucson, Arizona 85706
 Tel: 800.547.2537 Fax: 520.295.4197

C&D Technologies, EMEA/Asia/Pacific
 Milton Keynes MK14 5BU UK
 Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.