Ordering number: EN 2895A

Monolithic Linear IC

SANYO No.2895A

LA5690D, 5690S

Voltage Regulator Driver with Watchdog Timer

The LA5690 is a single-chip voltage regulator for microcomputer system monitor use that performs the functions of 5V output voltage control, watchdog timer, and voltage detector. The LA5690 uses a minimum number of parts to provide the basic functions.

Applications

- Microcomputer system for car equipment, refrigeration/heating equipment, office automation equipment

Functions

- Output voltage 5Vcontrol
- Watchdog timer
- Power-ON reset function
- Positive/negative logic output for reset

Features

- An external PNP transistor can be used to provide a low-saturation voltage regulator.
- CK input with edge detector
- Variable detection voltage
- Reset output with pull-up resistor of 10kΩ

Maximum Ratings at Ta = 25°C

				unit
Control Pin Voltage	V_{CONT} max	1sec	60	V
Control Pin Voltage	V_{CONT} max		41	V
Control Pin Current	I_{CONT} max	*$V_{CC} \geqq 6V$	11	mA
CK Input Voltage	V_{CK} max		25	V
Reset Pin Voltage	$V_{\overline{RES}}$ max, V_{RES} max		41	V
Allowable Power Dissipation	Pd max		500	mW
Operating Temperature	**Topr**		−40 to +85	°C
Storage Temperature	Tstg		−55 to +150	°C

*: A PNP transistor is connected to the LA5690D, 5690S externally to provide a low-saturation voltage regulator. Therefore, $I_{CONT} \fallingdotseq 100mA$ will flow, as starting current, in the V_{CC} range where the output cannot be regulated.

Operating Conditions at Ta = 25°C

				unit
Control Pin Voltage	V_{CONT}		6 to 40	V
Control Pin Current	I_{CONT} max		10	mA
Reset Output Current	$I_{\overline{RES}}$ max, I_{RES} max	External R pull-up	8	mA
Reset Detection Voltage	V_S min		4	V

Package Dimensions (unit: mm)
3001B [LA5690D]



SANYO: DIP8

Package Dimensions (unit: mm)
3017B [LA5690S]

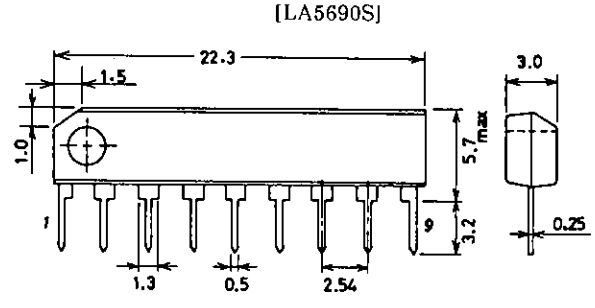

SANYO: SEP9

Operating Characteristics at Ta = 25°C, V_{CC} = 14V, I_O = 50mA, unless otherwise specified

			min	typ	max	unit
Operating Voltage	V_O		4.8	5.0	5.2	V
Line Regulation	ΔV_{OLN1}	9V≦V_{CC}≦16V		2	10	mV
	ΔV_{OLN2}	6V≦V_{CC}≦40V		4	30	mV
Load Regulation	ΔV_{OLD}	1mA≦I_O≦50mA		4	30	mV
Current Dissipation	I_{CC}	I_O = 0		4.9	6.5	mA
Output Noise Voltage	V_{NO}	10Hz≦f≦100kHz, V_{CK} = 0		200		μV
Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta Ta$	I_O = 5mA, −40°C≦Ta≦+85°C		±0.2		mV/°C
Reference Voltage	V_{REF}		1.13	1.18	1.23	V
"H"-Level CK Input Voltage	V_{IH}		2			V
"L"-Level CK Input Voltage	V_{IL}				0.8	V
"H"-Level CK Input Current	I_{IH}	V_{CK} = 5V		0.3	0.7	mA
"L"-Level CK Input Current	I_{IL}	V_{CK} = 0	−1.0	−0.1		μA
"H"-Level Reset Output Voltage	$V_{\overline{ORH}}/V_{ORH}$		4.8	5.0	5.2	V
"L"-Level Reset Output Voltage	$V_{\overline{ORL1}}/V_{ORL1}$			40	200	mV
"L"-Level Reset Output Voltage	$V_{\overline{ORL2}}/V_{ORL2}$	$I_{\overline{RES}} = I_{RES}$ = 8mA		0.16	0.8	V
CK Input Pulse Width	t_{CKW}	V_{CK} = 5V	3			μs
Reset Output Delay Time	t_d	C_t = 1μF	7.5	10	12.5	ms
Watchdog Time	t_{WD}	C_t = 1μF	3.8	5.0	6.2	ms
Watchdog Reset Time	t_{WR}	C_t = 1μF	0.1	0.25	0.4	ms
Reset Hysteresis Voltage	Vhys	V_S = 4.5V	100	200	300	mV

Pin Assignment

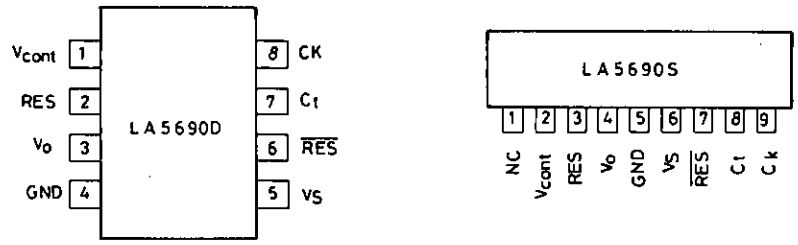

The NC pin, which is left open, must not be used for wiring.

Equivalent Circuit Block Diagram

Unit (resistance: Ω)

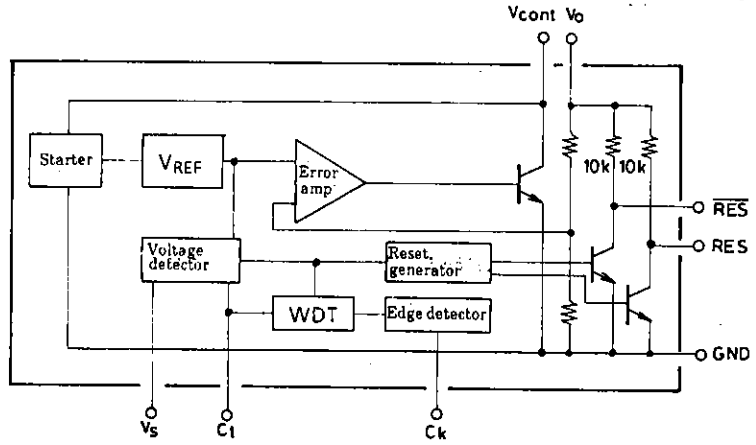

The reset output contains a pull-up resistor of 10kΩ.

Test Circuit

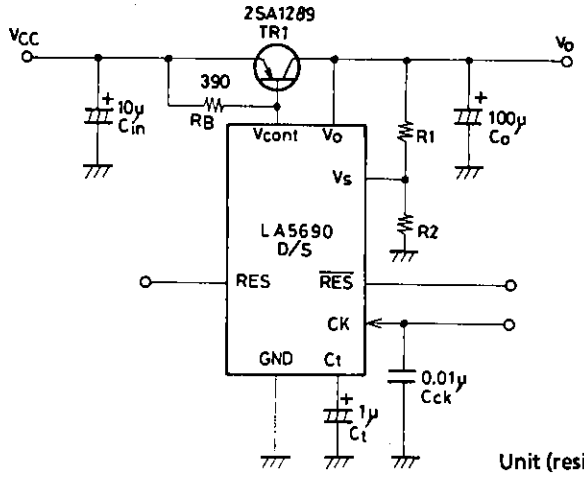

Unit (resistance: Ω, capacitance: F)

Timing Chart

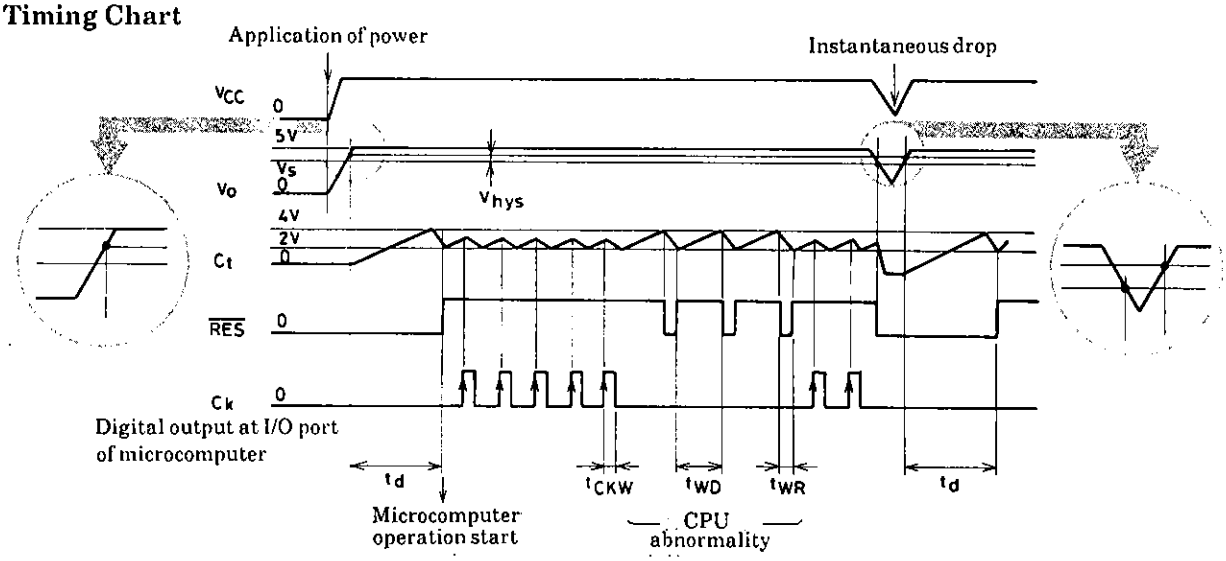

Note : Edge-triggered at the point indicated by the arrow of C_K signal.

Sample Application Circuit

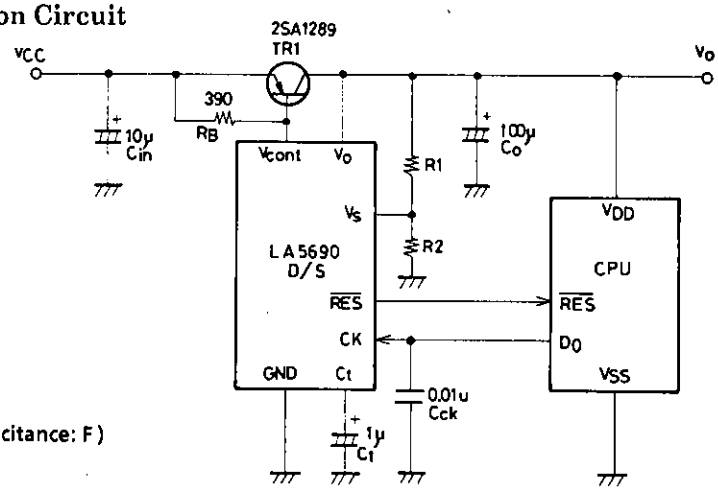

Unit (resistance: Ω, capacitance: F)

TR1 : 2SA1289 (60V/5A, TO-220)

C_t : Sanyo OS capacitor

$V_S = V_{REF} \times (\frac{R1}{R2} + 1)$

$V_{REF} \fallingdotseq 1.18(V)$

$t_d = 10 \times C_t\,(\mu F)\,[ms]$

$t_{WD} = 5 \times C_t\,(\mu F)\,[ms]$

$t_{WR} = 0.25 \times C_t\,(\mu F)\,[ms]$

- C_t,C_O : Capacitors whose value does not vary with temperature very much.
- C_{CK} : Must be used to eliminate noise in the reset output.

P_d max – T_a

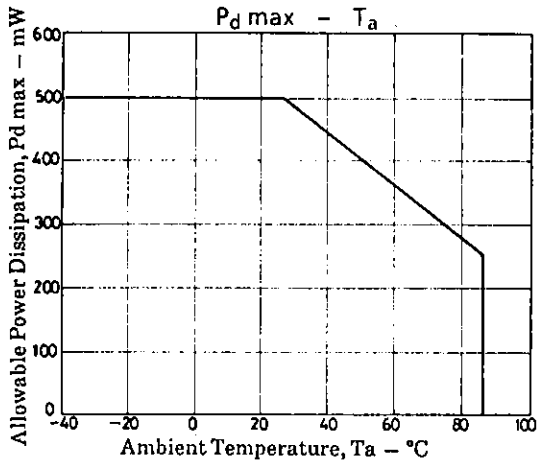

V_o – V_{CC}

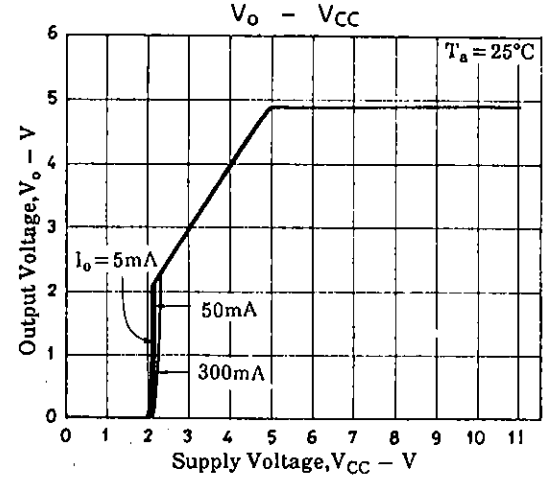

$V_{\overline{RES}}$ – V_o

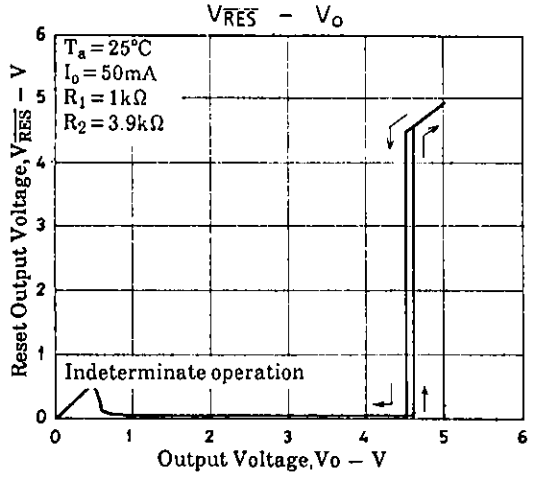

V_{RES} – V_o

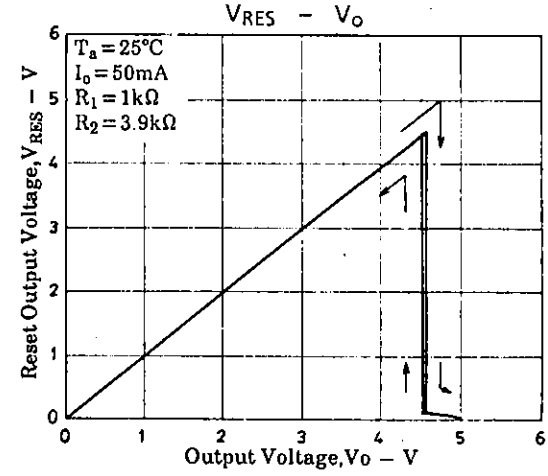

V_o – T_a

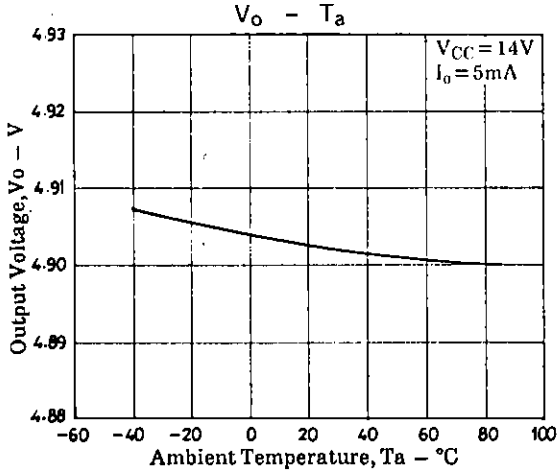

I_{CC} – V_{CC}

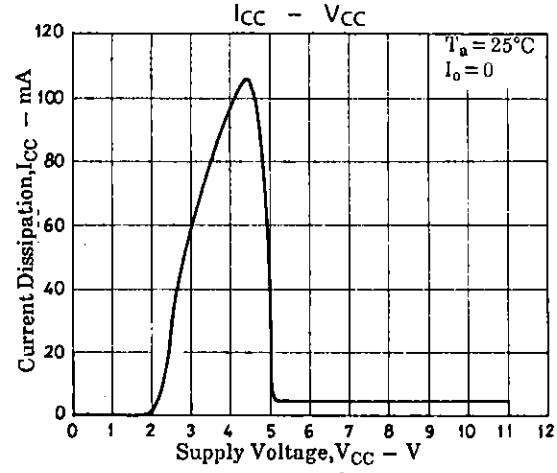

I_{CC} – T_a

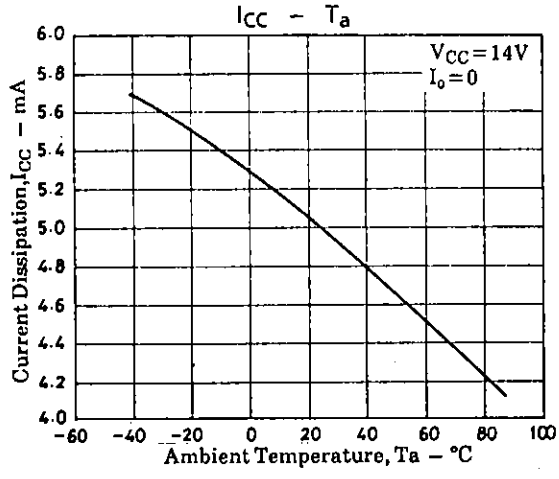

R_{rej} – f

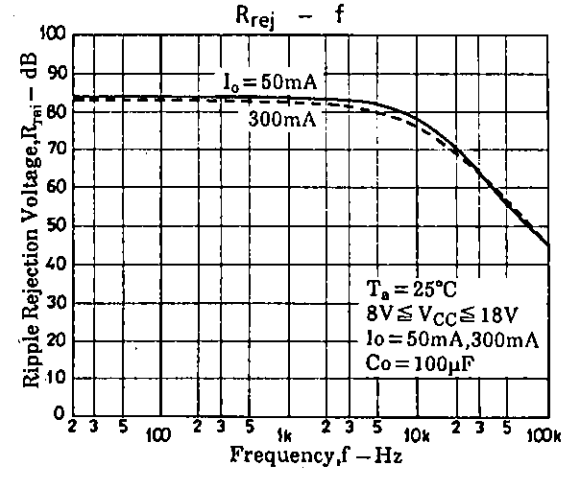

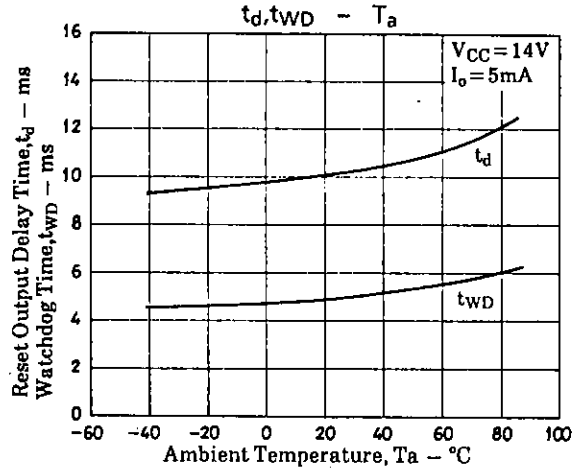

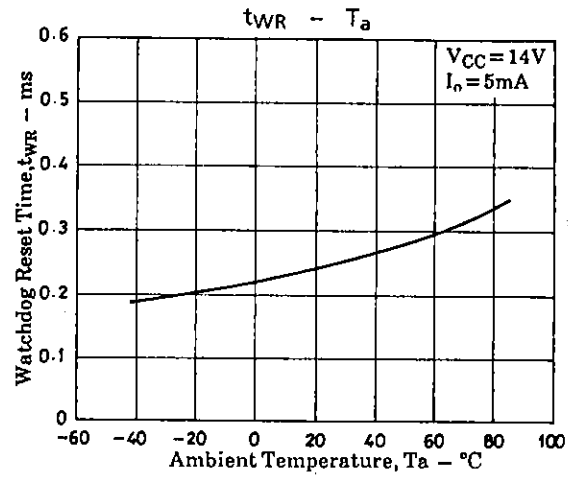

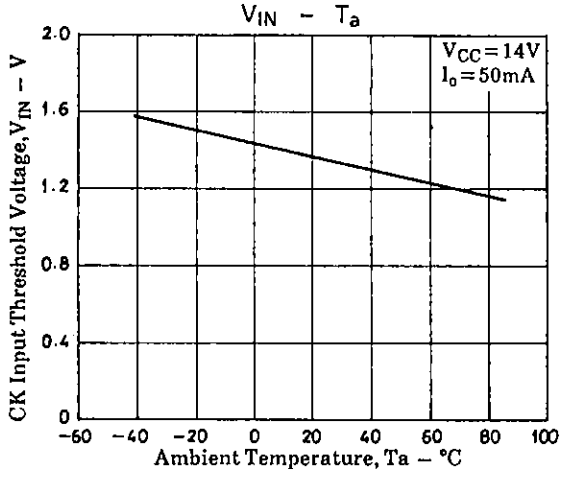

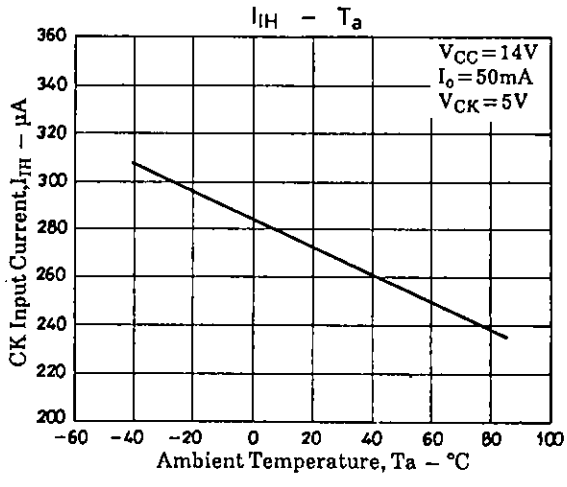

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.