



PNP Epitaxial Planar Silicon Composite Transistor Low-Frequency General-Purpose Amp, Driver Applications

- Composite type with 2 transistors contained in the CP package currently in use, improving the mounting efficiency greatly.
- The FC149 is formed with two chips, being equivalent to the 2SA1813, placed in one package.
- Adoption of FBET process.
- High DC current gain ($h_{FE}=500$ to 1200).
- High V_{EBO} ($V_{EBO} \geq 15V$).
- Excellent in thermal equilibrium and pair capability.



unit:mm
2067A

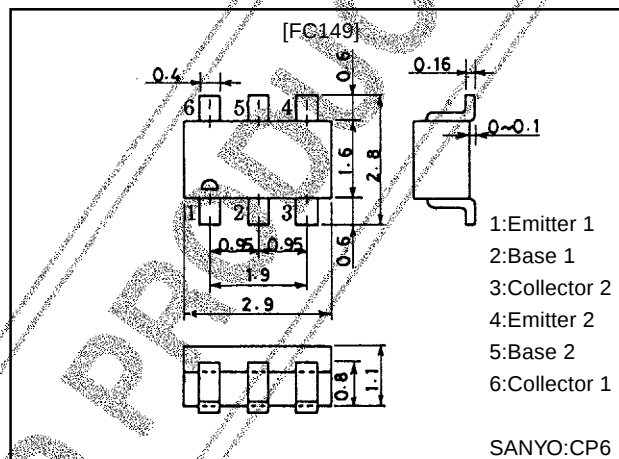

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$









Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CB0}		−30	V
Collector-to-Emitter Voltage	V_{CE0}		−25	V
Emitter-to-Base Voltage	V_{EB0}		−15	V
Collector Current	I_C		−150	mA
Collector Current (Pulse)	I_{CP}		−300	mA
Base Current	I_B		−30	mA
Collector Dissipation	P_C	1 unit	200	mW
Total Dissipation	P_T		300	mW
Junction Temperature	T_J		150	°C
Storage Temperature	T_{stg}		−55 to +150	°C


Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditons	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB}=-20V, I_E=0$			-0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=-10V, I_E=0$			-0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=5V, I_C=-1mA$	500	800	1200	
DC Current Gain Ratio	$h_{FE(small/large)}$	$V_{CE}=5V, I_C=-1mA$	0.7	0.98		
Gain-Bandwidth Product	f_T	$V_{CE}=10V, I_C=10mA$		210		MHz
Output Capacitance	C_{ob}	$V_{CB}=-10V, f=1MHz$		2.6		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=-50mA, I_B=-1mA$		-0.15	-0.3	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C=-50mA, I_B=-1mA$		-0.78	-1.1	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-30			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-1mA, R_{BE}=\infty$	-25			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-15			V

Marking:149

SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

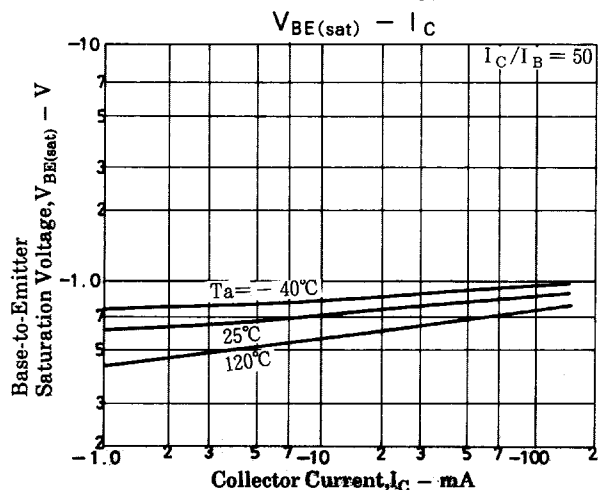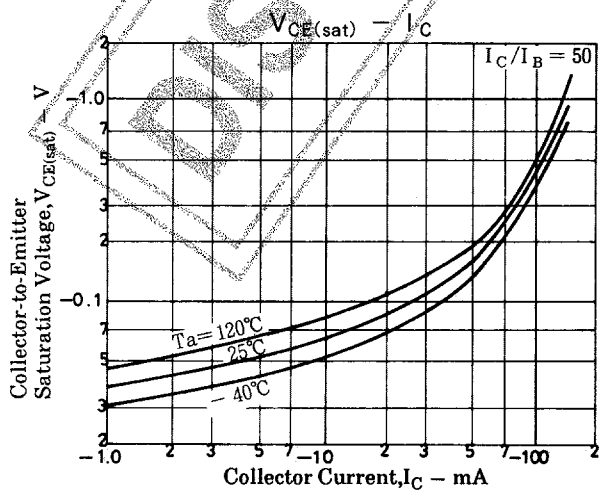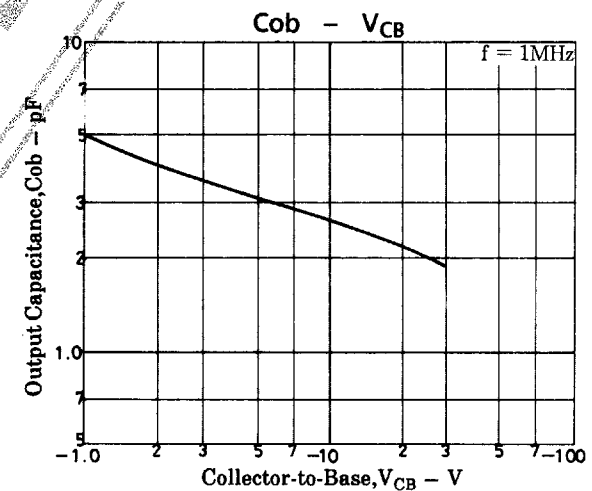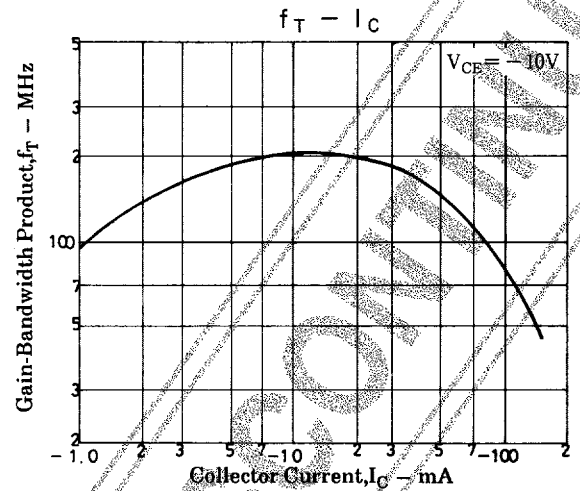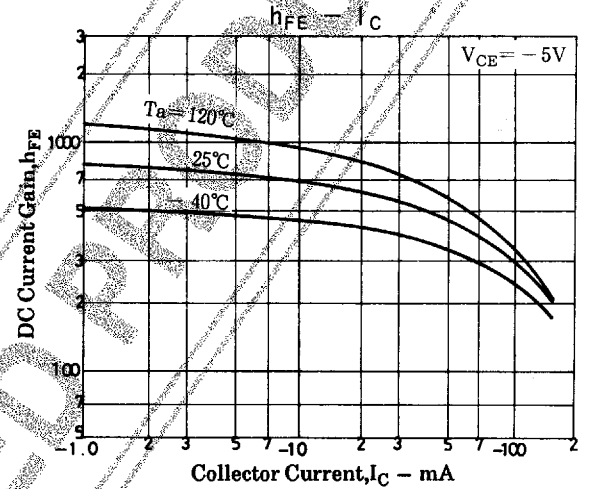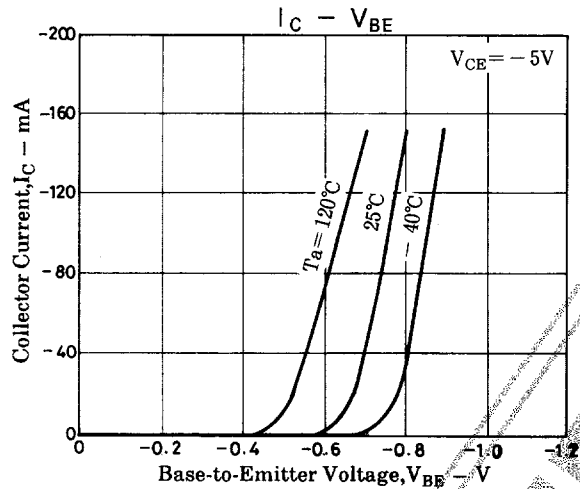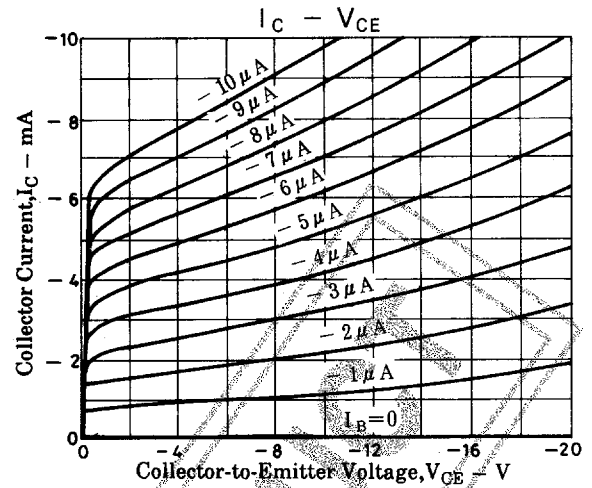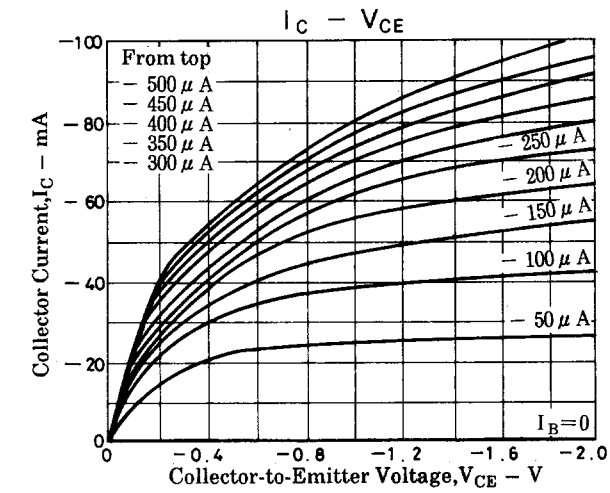

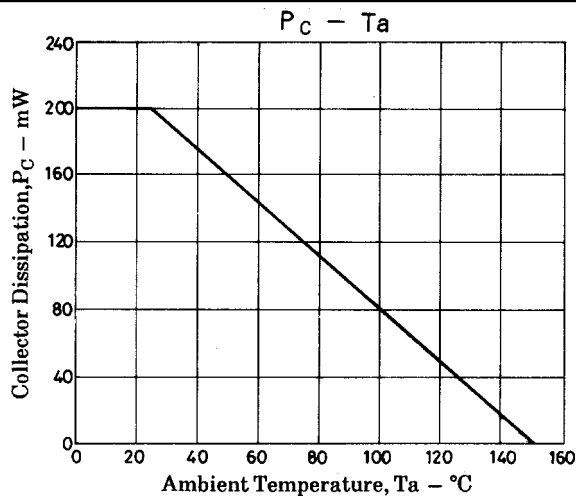

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1998. Specifications and information herein are subject to change without notice.