

# SHINDENGEN

## Power Switching Regulators


MA3000 Series

**MA3410**

### OUTLINE DIMENSIONS

Case : MA7

Unit : mm

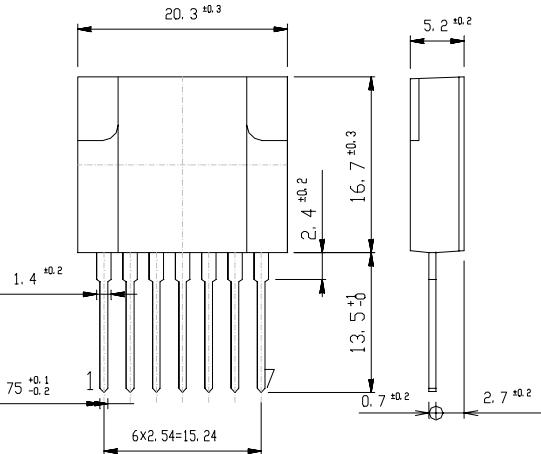

### RATINGS

#### ● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-30~125	°C
Operating Temperature	Top		-20~125	°C
Junction Temperature	Tj		150	°C
Peak Input Voltage	Vin	②+,④-,Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I <sub>CEX</sub> .	500	V
Input Current	Iin	DC ②+,④- Pulse ②+,④- Pulse Width 150 μ s MAX, Duty1/2, Sawtooth Wave, Peak Value.	3	A
Maximum Power Dissipation	P <sub>D</sub>	Ta=25°C	3	W
	P <sub>D</sub>	Heatsink Tc=100°C	12	W
Dielectric Strength	Vdis	Terminals To Case AC 1 min	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	MΩ
Max Voltage ④ to ⑦	V(④)•(⑦)	④+,⑦-	6	V
Max Current ⑥ to ④	I(⑥)•(④)	⑥+,④- (Peak) Duty Max 3/5	100	mA
Max Current ⑤ to ④	I(⑤)•(④)	⑤+,④- (Q <sub>2</sub> Collector Current)	500	mA

#### ● Electrical Characteristics (Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit	
Q1	Collector Cutoff Current	I <sub>CEX</sub>	V <sub>CE</sub> =500V, Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I <sub>CEX</sub> , ②+,④-	MAX 100	μ A
	DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 1.5A, ②+,④-,⑤I <sub>B</sub>	15~30	
	Collector to Emitter Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =1.5A, I <sub>B</sub> =0.3A, ②+,④-,⑤I <sub>B</sub>	MAX 1.0	V
	Driving Saturation Voltage	V <sub>D(sat)</sub>	I <sub>C</sub> =1.5A, I <sub>B</sub> =0.3A, ②+,④-,⑤I <sub>B</sub>	MIN 1.7	V
	Thermal Resistance	θ <sub>jc</sub>	Junction to Case	MAX 2.3	V
			MAX 4.1	°C/W	

## ● Standard Operating Condition•Design Standard For Application Circuit

Item	Conditions	Ratings	Unit
Input Rated Voltage		AC85~132	V
Output Nominal Wattage		40	W
Output Nominal Voltage		12	V
Output Nominal Current		3.3	A

## ● Standard Operating Condition•Standard Operating Characteristics (Ta=25°C)

Item	Conditions	Ratings	Unit	
AC Input Voltage	$I_O=3.3A, 10.5V \leq V_O \leq 12.6V$	MAX 85	V	
Minimum Input Full Load Output Voltage	$V_{in}=90V, I_O=3.3A$	$12.0 \pm 0.6$	V	Fig 2, ① Refer
Maximum Input Light Load Output Voltage	$V_{in}=132V, I_O=0.0A$	$12.0 \pm 0.6$	V	Fig 2, ② Refer
Over Current Protection	Foldback Current	$V_{in}=132V, V_O=10V$	MAX 5.3	A Fig 2, ③ Refer
	Short Circuit	$V_{in}=132V, R_O=0.5\Omega$	Nodamage To Any Device, Automatic Recovery.	- Fig 2, ④ Refer

Figure in ○=Terminal Sign

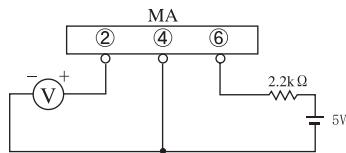


Fig1. Measurement Circuit


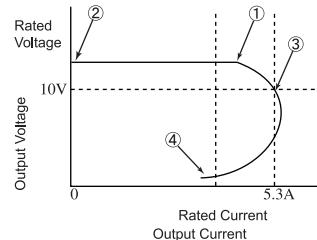



Fig2. Output Voltage/Current


## MA3410 Transient Thermal Impedance

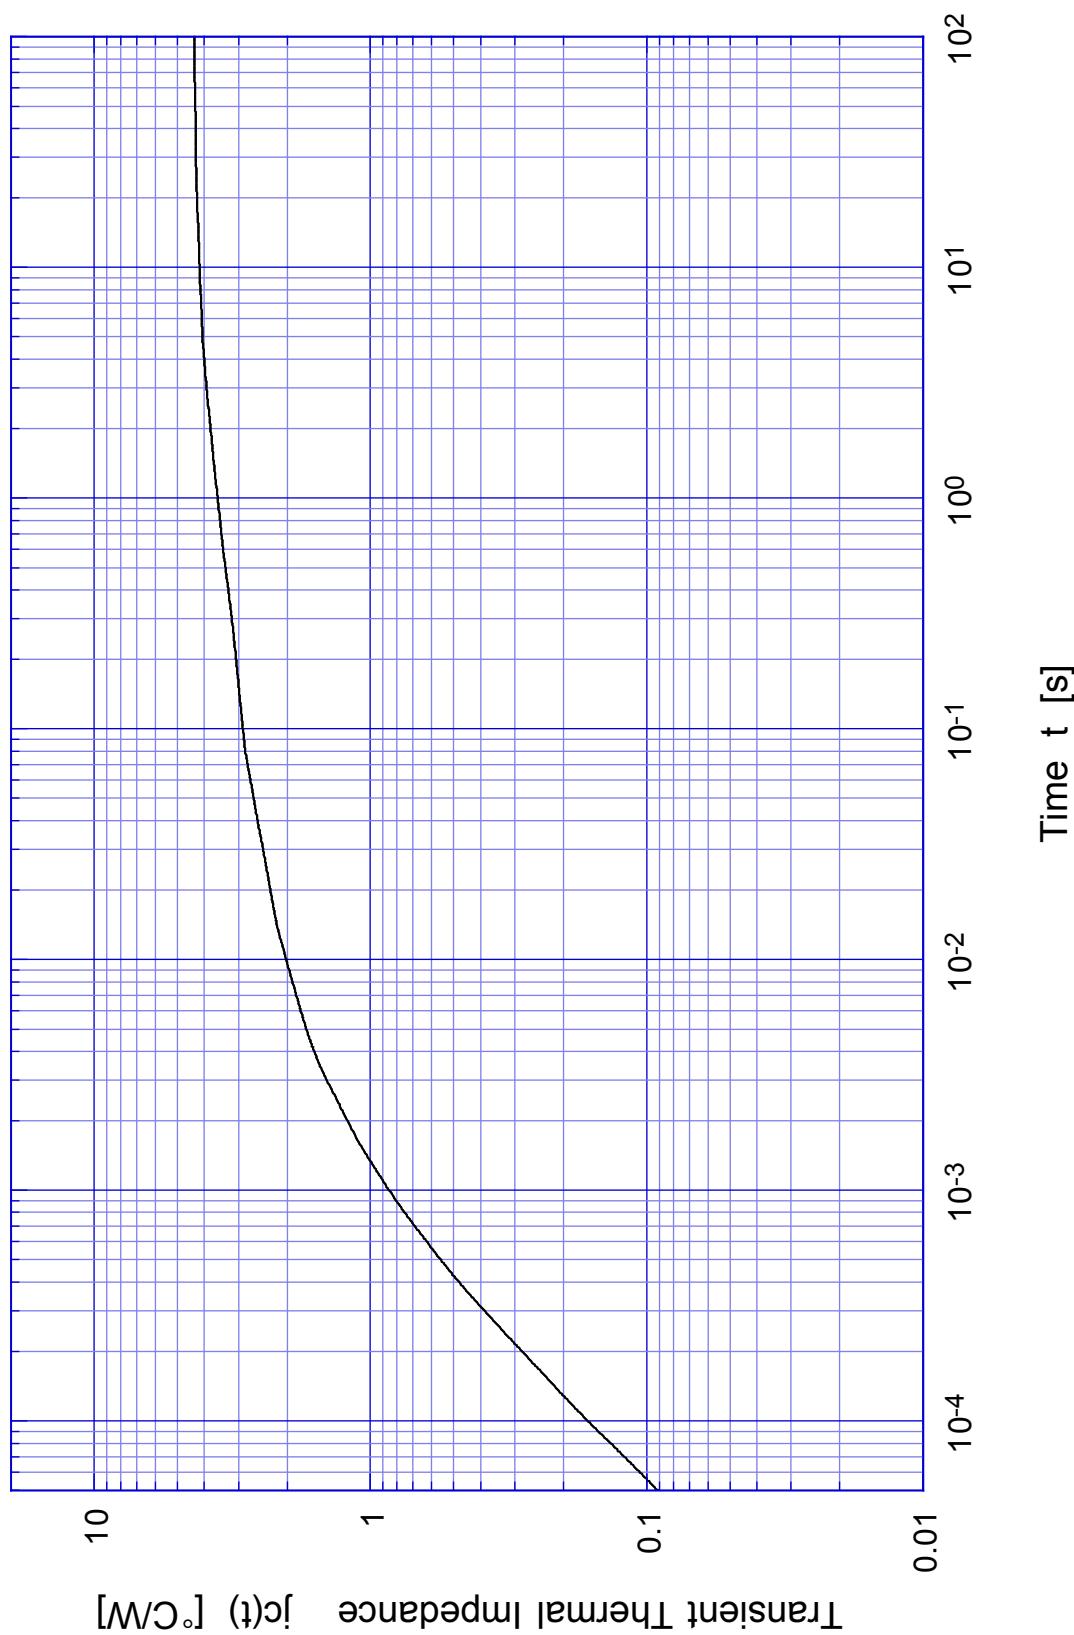

# MA3410

## Forward Bias SOA

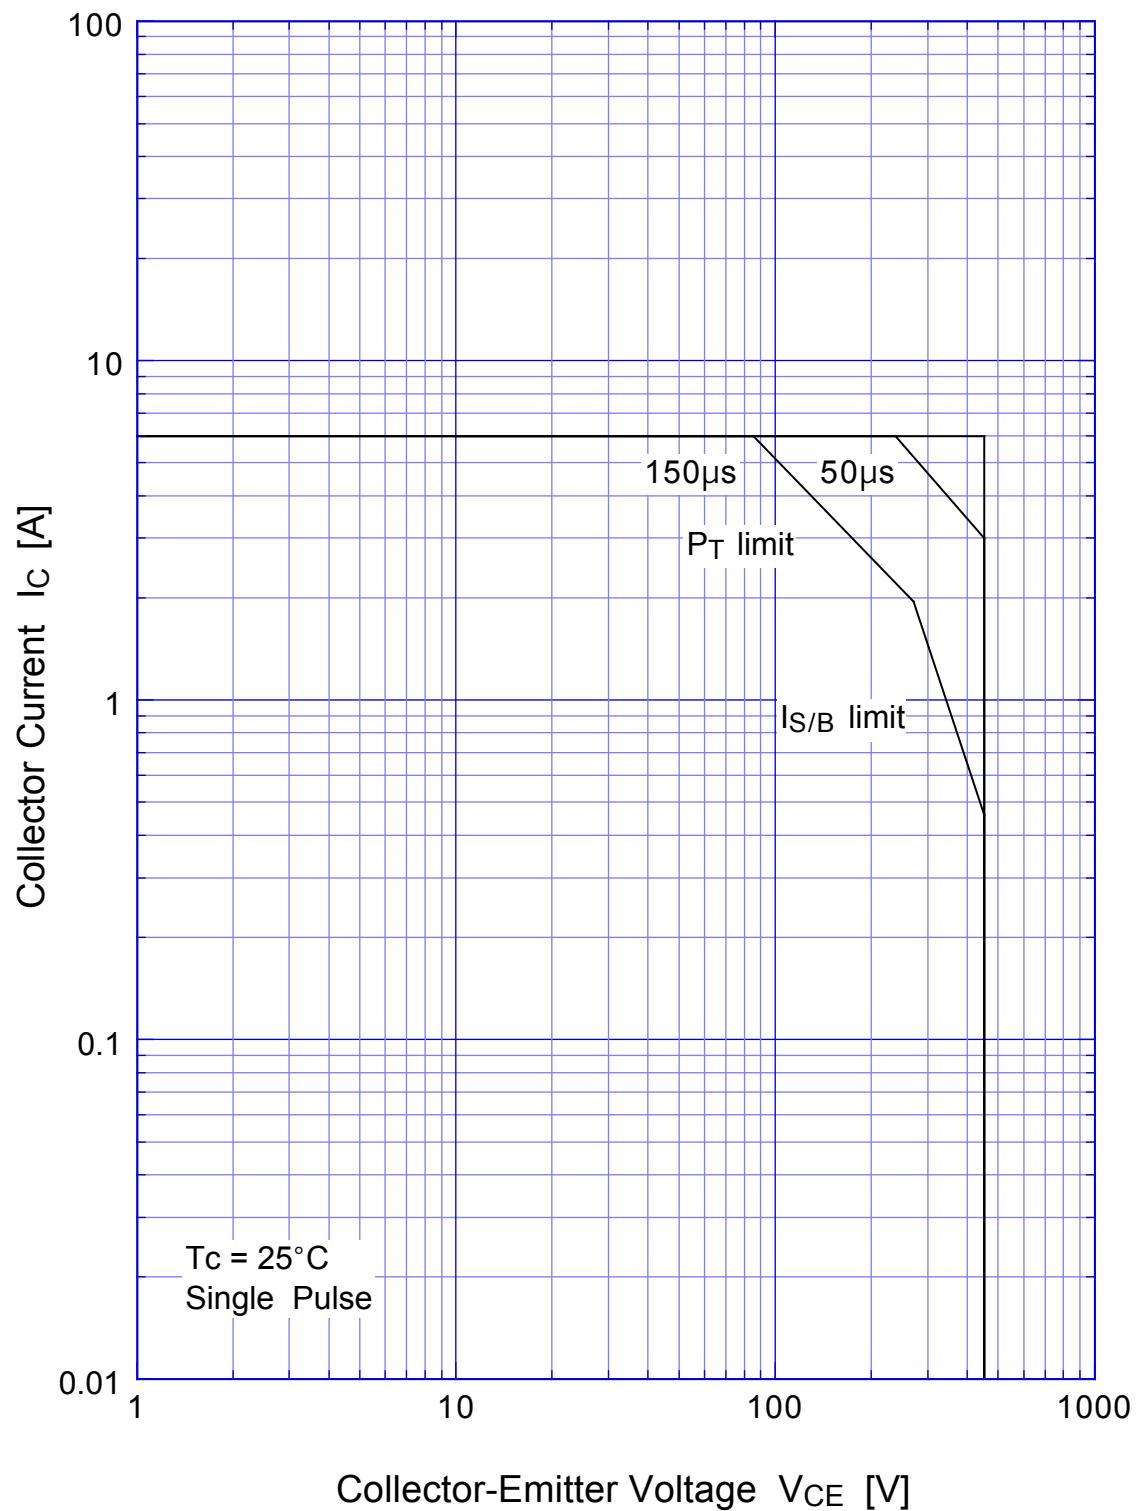

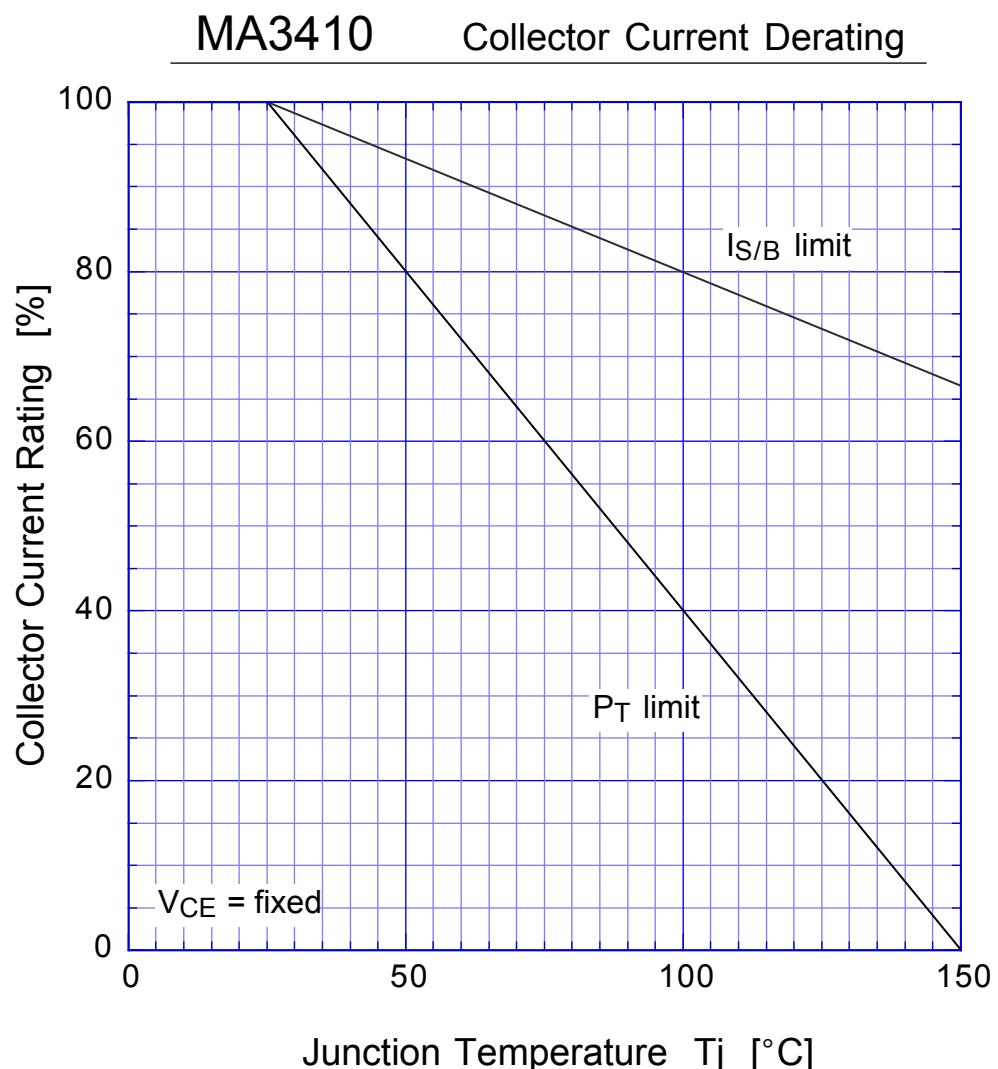

MA3410

Reverse Bias SOA

