

M/A-COM 3 Volt Voltage Variable Absorptive Attenuator 40 dB, 0.5 - 2.0 GHz

Features

- Single Positive Voltage Control 0 to +3 Volts
- 40 dB Attenuation Range at 0.9 GHz
- ± 2 dB Linearity from BSL
- Low DC Power Consumption
- Low Cost SOIC-8 Plastic Package
- Tape and Reel Packaging Available


Description

M/A-COM's AT-113 is a GaAs MMIC voltage variable absorptive attenuator in a low cost SOIC 8-lead surface mount plastic package. The AT-113 is ideally suited for use where linear attenuation fine tuning and very low power consumption are required.

Typical applications include radio, cellular, GPS equipment and automatic gain/level control circuits.

The AT-113 is fabricated with a monolithic GaAs MMIC using a mature 1-micron process. The process features full chip passivation for increased performance and reliability.

SOIC-8¹

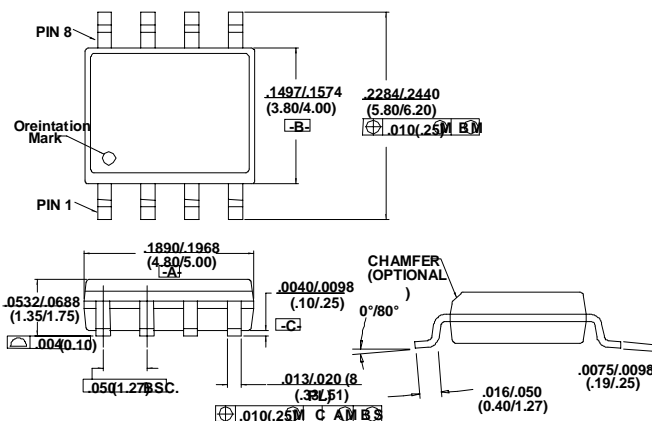

1. Dimensions are in inches/mm.

Ordering Information

Part Number	Package
AT-113	SOIC-8 Lead Plastic
AT-113TR	Forward Tape and Reel ¹

1. If specific reel size is required, consult factory for part number assignment.

Electrical Specifications: $T_A = +25^\circ\text{C}$ ¹

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	0.5 - 1.0 GHz	dB		2.7	3.0
	1.0 - 2.0 GHz	dB		3.0	3.5
Attenuation	0.5 - 1.0 GHz	dB	40		
	1.0 - 2.0 GHz	dB	35		
Insertion Loss Flatness (Peak-to-Peak)	0.5 - 1.0 GHz	dB		± 0.5	± 0.8
	1.0 - 2.0 GHz	dB		± 1.2	± 1.5
VSWR				2:1	
$T_{\text{rise}}, T_{\text{fall}}$	10% to 90% RF, 90% to 10% RF	μS		10	
$T_{\text{on}}, T_{\text{off}}$	50% Control to 90% RF, Control to 10% RF	μS		12	
Transients	In-band	mV		10	

1. All measurements at 1 GHz in a 50 Ω system unless otherwise specified. The RF ports must be blocked out side of the package from ground or any other voltage.

Specifications subject to change without notice.

■ North America: Tel. (800) 366-2266, Fax (800) 618-8883
 ■ Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.

tyco Electronics


M/A-COM

Absolute Maximum Ratings¹

Parameter	Absolute Maximum
Maximum Input Power	+21 dBm
Supply Voltage V_{CC}	-1V, +8V
Control Voltage V_C	-1V, $V_{CC} + 0.5V$
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C





1. Exceeding any one or a combination of these limits may cause permanent damage.

Functional Schematic^{1, 2, 3}

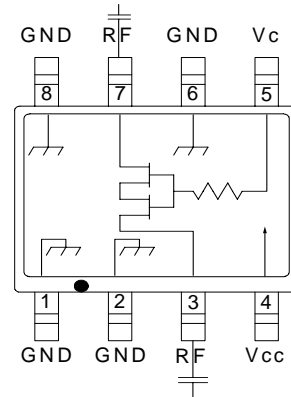

1. $V_{CC} = +3 V_{DC}$ @ 50 μA max.
2. $V_C = 0 V_{DC}$ to +3 V_{DC} @ 50 μA max.
3. External DC blocking capacitors are required on all RF ports.
4. 39pF used for data measurements.

Typical Performance Curves

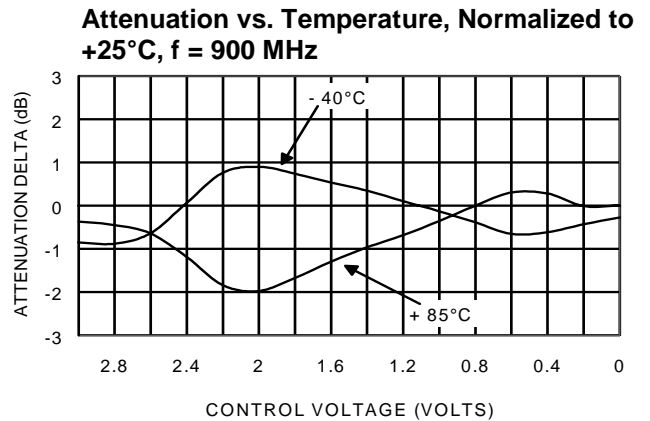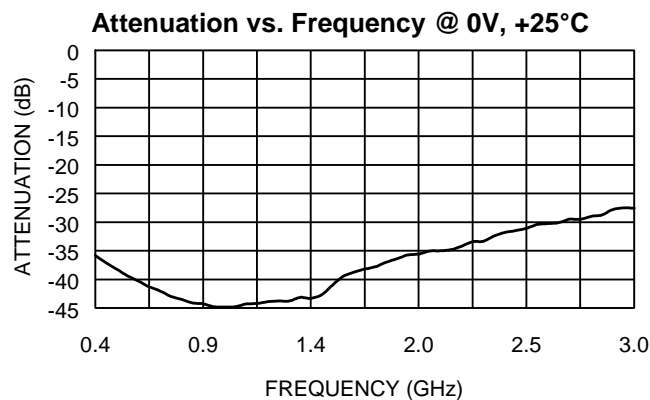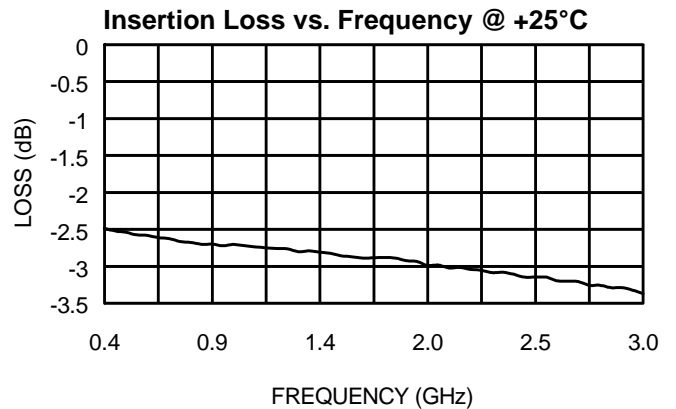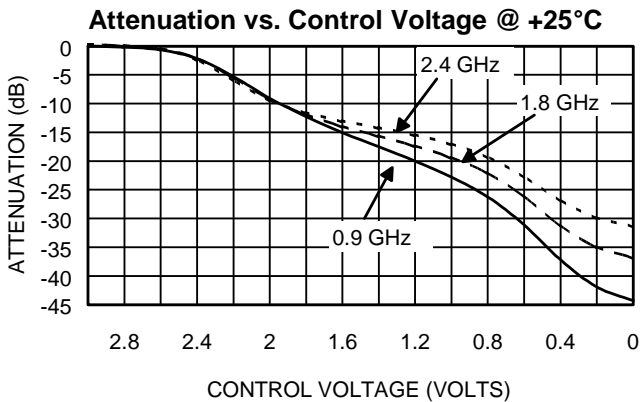




Specifications subject to change without notice.

V 3.0

■ North America: Tel. (800) 366-2266, Fax (800) 618-8883
 ■ Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.

Typical Performance Curves (Cont'd)

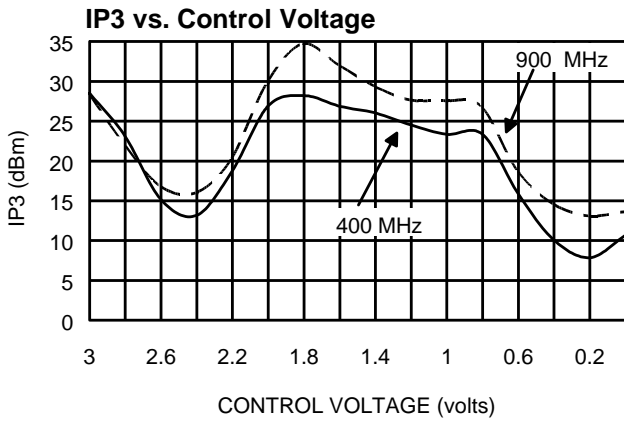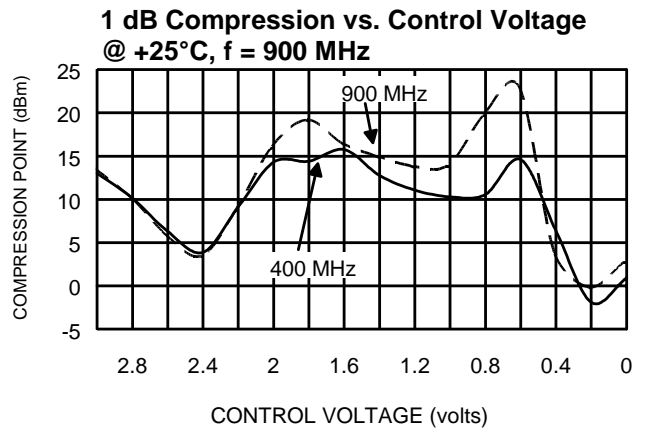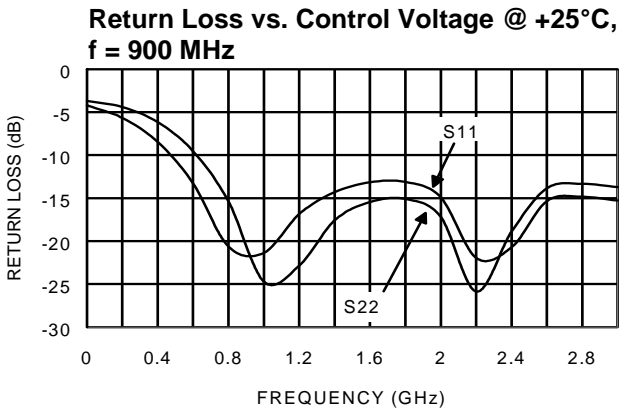

Specifications subject to change without notice.

■ North America: Tel. (800) 366-2266, Fax (800) 618-8883
 ■ Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.