

## SWITCHMODE SERIES NPN POWER TRANSISTORS

... designed for use in high-voltage, high-speed, power switching in inductive circuit, they are particularly suited for 115 and 220 V switchmode applications such as switching regulator's, converter.

### FEATURES:

\*Collector-Emitter Sustaining Voltage-

$$V_{CEO(sus)} = 400 \text{ V (Min)}$$

\* Collector-Emitter Saturation Voltage -

$$V_{CE(sat)} = 1.5 \text{ V (Max.) @ } I_C = 5.0 \text{ A, } I_B = 0.5 \text{ A}$$


\* Switching Time -  $t_f = 1.0 \text{ us (Max.) @ } I_C = 5.0 \text{ A}$

**NPN**  
**2SC3306**


**10 AMPERE**  
**SILICON POWER**  
**TRANSISTORS**  
**400 VOLTS**  
**100 WATTS**

### MAXIMUM RATINGS

Characteristic	Symbol	2SC3306	Unit
Collector-Emitter Voltage	$V_{CEO}$	400	V
Collector-Base Voltage	$V_{CBO}$	500	V
Emitter-Base Voltage	$V_{EBO}$	7.0	V
Collector Current - Continuous	$I_C$	10	A
- Peak	$I_{CM}$	15	
Base current	$I_B$	5.0	A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	100 0.8	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$



**TO-247(3P)**

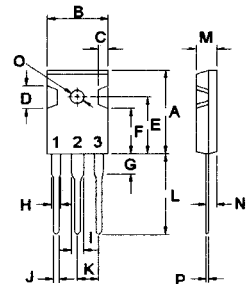


PIN 1.BASE  
2.COLLECTOR  
3.EMITTER

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.25	$^\circ\text{C/W}$

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

FIGURE -1 POWER DERATING

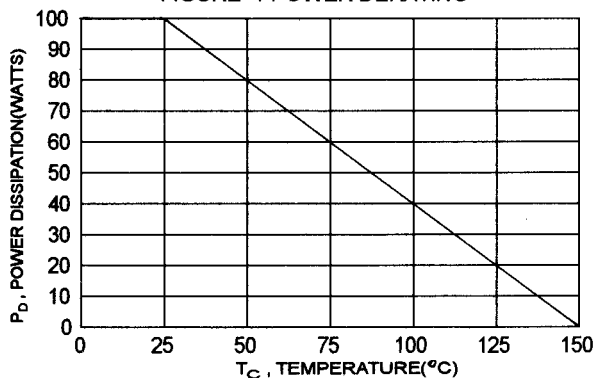

ELECTRICAL CHARACTERISTICS (  $T_c = 25^\circ\text{C}$  unless otherwise noted )

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

## OFF CHARACTERISTICS

Collector-Base Breakdown Voltage ( $I_C = 1.0 \text{ mA}$ , $I_E = 0$ )	$V_{(BR)CBO}$	500		V
Collector-Emitter Breakdown Voltage ( $I_C = 10 \text{ mA}$ , $I_B = 0$ )	$V_{(BR)CEO}$	400		V
Emitter-Base Breakdown Voltage ( $I_E = 1.0 \text{ mA}$ , $I_C = 0$ )	$V_{(BR)EBO}$	7.0		V
Collector Cutoff Current ( $V_{CB} = 400 \text{ V}$ , $I_E = 0$ )	$I_{CBO}$		100	$\mu\text{A}$
Emitter Cutoff Current ( $V_{EB} = 7.0 \text{ V}$ , $I_C = 0$ )	$I_{EBO}$		1.0	mA

## ON CHARACTERISTICS (1)


DC Current Gain ( $I_C = 5.0 \text{ A}$ , $V_{CE} = 5.0 \text{ V}$ )	hFE	10		
Collector-Emitter Saturation Voltage ( $I_C = 5.0 \text{ A}$ , $I_B = 500 \text{ mA}$ )	$V_{CE(sat)}$		1.5	V
Base-Emitter Saturation Voltage ( $I_C = 5.0 \text{ A}$ , $I_B = 500 \text{ mA}$ )	$V_{BE(sat)}$		2.0	V

## SWITCHING CHARACTERISTICS


Rise Time	$V_{CC} = 200 \text{ V}$ , $I_C = 5.0 \text{ A}$ $I_{B1} = -I_{B2} = 500 \text{ mA}$ $R_L = 40 \text{ ohm}$	$t_r$	1.0	$\mu\text{s}$
Storage Time		$t_s$	2.5	$\mu\text{s}$
Fall Time		$t_f$	1.0	$\mu\text{s}$

(1) Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$


SAFE OPERATING AREA

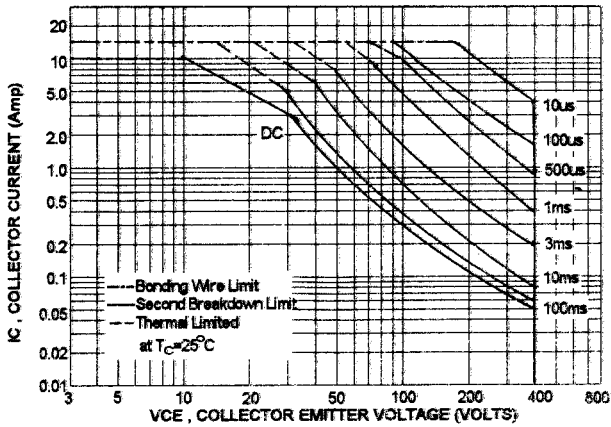


Ic - Vbe

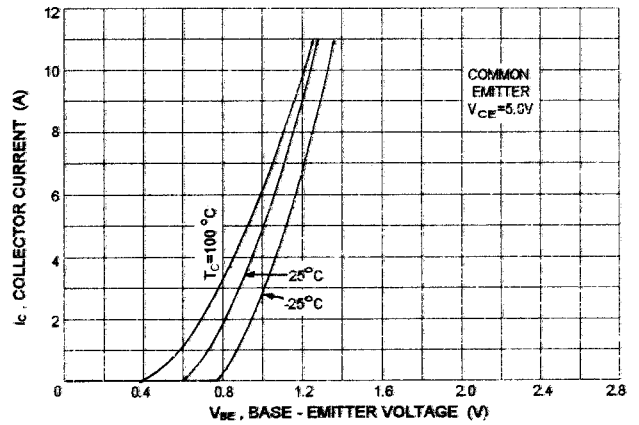


DC CURRENT GAIN

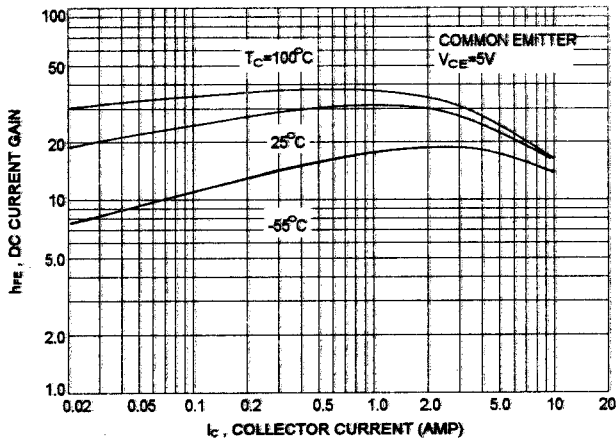

Ic - Vce

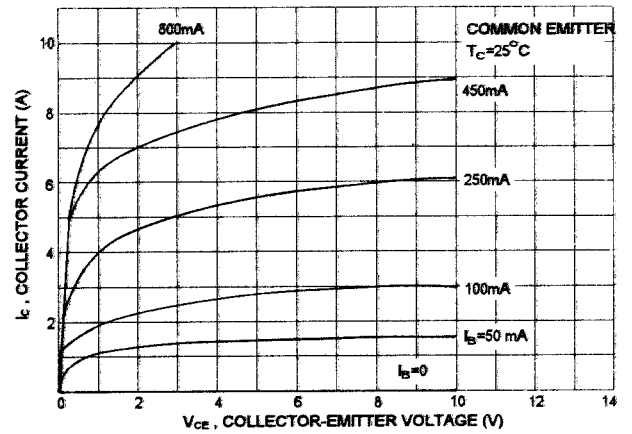

SWITCHING TIME

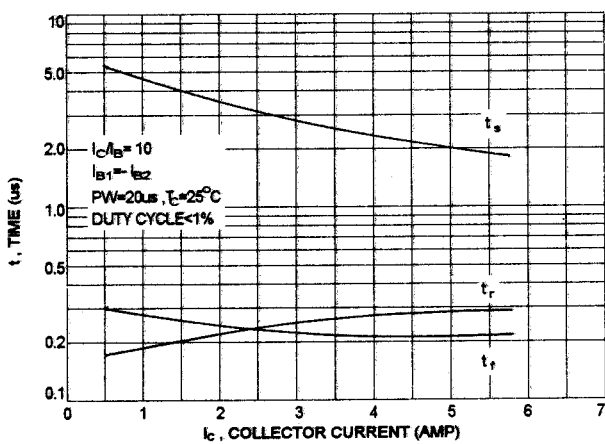

"ON" VOLTAGES

