

74VCX164245

Low Voltage 16-Bit Dual Supply Translating Transceiver with 3-STATE Outputs

General Description

The VCX164245 is a dual supply, 16-bit translating transceiver that is designed for 2 way asynchronous communication between busses at different supply voltages by providing true signal translation. The supply rails consist of V_{CCB} , which is the higher potential rail operating at 2.3 to 3.6V and V_{CCA} , which is the lower potential rail operating at 1.65 to 2.7V. (V_{CCA} must be less than or equal to V_{CCB} for proper device operation.) This dual supply design allows for translation from 1.8V to 2.5V busses to busses at a higher potential, up to 3.3V.

The Transmit/Receive (T/R) input determines the direction of data flow. Transmit (active-HIGH) enables data from A Ports to B Ports; Receive (active-LOW) enables data from B Ports to A Ports. The Output Enable (OE) input, when HIGH, disables both A and P Ports by placing them in a High-Z condition. The A Port interfaces with the lower voltage bus (1.8 – 2.5V); The B Port interfaces with the higher voltage bus (2.7 – 3.3V). Also the VCX164245 is designed so that the control pins (T/R_n, OE_n) are supplied by V_{CCB} . The 74VCX164245 is suitable for mixed voltage applications such as notebook computers using a 1.8V CPU and 3.3V peripheral components. It is fabricated with an Advanced CMOS technology to achieve high speed operation while maintaining low CMOS power dissipation.

Features

- Bidirectional interface between busses ranging from 1.65V to 3.6V
- Supports Live Insertion and Withdrawal (Note 1)
- Static Drive (I_{OH}/I_{OL})
 - ±24 mA @ 3.0V V_{CC}
 - ±18 mA @ 2.3V V_{CC}
 - ±6 mA @ 1.65V V_{CC}
- Uses patented noise/EMI reduction circuitry
- Functionally compatible with 74 series 16245
- Latchup performance exceeds 300 mA
- ESD performance:
 - Human Body Model >2000V
 - Machine model >200V


Note 1: To ensure the high impedance state during power up or power down, OE_n should be tied to V_{CCB} through a pull up resistor. The minimum value of the resistor is determined by the current sourcing capability of the driver.

Ordering Code:

Order Number	Package Number	Package Description
74VCX164245MTD	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

Logic Diagram

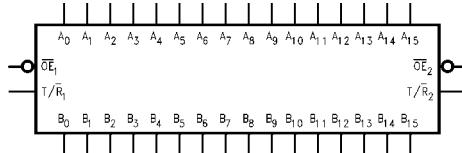


Pin Descriptions

Pin Names	Description
OE _n	Output Enable Input (Active LOW)
T/R _n	Transmit/Receive Input
A ₀ -A ₁₅	Side A Inputs or 3-STATE Outputs
B ₀ -B ₁₅	Side B Inputs or 3-STATE Outputs

Quiet Series™ is a trademark of Fairchild Semiconductor Corporation.

Connection Diagram

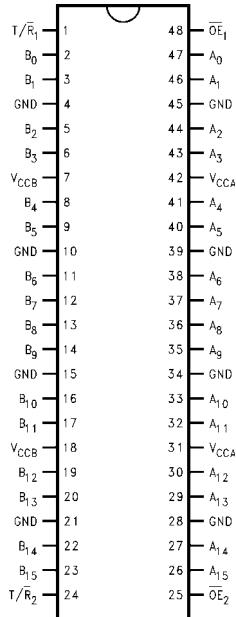

Truth Tables

Inputs		Outputs
\overline{OE}_1	T/\bar{R}_1	
L	L	Bus B_0-B_7 Data to Bus A_0-A_7
L	H	Bus A_0-A_7 Data to Bus B_0-B_7
H	X	HIGH Z State on A_0-A_7 , B_0-B_7

Inputs		Outputs
\overline{OE}_2	T/\bar{R}_2	
L	L	Bus B_8-B_{15} Data to Bus A_8-A_{15}
L	H	Bus A_8-A_{15} Data to Bus B_8-B_{15}
H	X	HIGH-Z State on A_8-A_{15} , B_8-B_{15}

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial (HIGH or LOW, inputs may not float)



Z = High Impedance

Translator Power Up Sequence Recommendations

To guard against power up problems, some simple guidelines need to be adhered to. The VCX164245 is designed so that the control pins (T/\bar{R}_n , \overline{OE}_n) are supplied by V_{CCB} . Therefore the first recommendation is to begin by powering up the control side of the device, V_{CCB} . The \overline{OE}_n control pins should be ramped with or ahead of V_{CCB} , this will guard against bus contentions and oscillations as all A-Port and B Port outputs will be disabled. To ensure the high impedance state during power up or power down, \overline{OE}_n should be tied to V_{CCB} through a pull up resistor. The minimum value of the resistor is determined by the current

sourcing capability of the driver. Second, the T/\bar{R}_n control pins should be placed at logic low (0V) level, this will ensure that the B-side bus pins are configured as inputs to help guard against bus contention and oscillations. B-side Data Inputs should be driven to a valid logic level (0V or V_{CCB}), this will prevent excessive current draw and oscillations. V_{CCA} can then be powered up after V_{CCB} , but should never exceed the V_{CCB} voltage level. Upon completion of these steps the device can then be configured for the users desired operation. Following these steps will help to prevent possible damage to the translator device as well as other system components.

Logic Diagrams



Please note that these diagrams are provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings ^(Note 2)		Recommended Operating Conditions ^(Note 4)					
Supply Voltage		Power Supply (Note 5)					
V_{CCA}	-0.5V to V_{CCB}	V_{CCA}	1.65V to 2.7V				
V_{CCB}	-0.5V to 4.6V	V_{CCB}	2.3V to 3.6V				
DC Input Voltage (V_I)	-0.5V to +4.6V	Input Voltage (V_I) @ \overline{OE} , T/\overline{R}	0V to V_{CCB}				
DC Output Voltage ($V_{I/O}$)	-0.5V to +4.6V	Input/Output Voltage ($V_{I/O}$)					
Outputs 3-STATE	-0.5V to +4.6V	A_n	0V to V_{CCA}				
Outputs Active (Note 3)		B_n	0V to V_{CCB}				
A_n	-0.5V to V_{CCA} + 0.5V	Output Current in I_{OH}/I_{OL}					
B_n	-0.5V to V_{CCB} + 0.5V	$V_{CCA} = 2.3V$ to 2.7V	± 18 mA				
DC Input Diode Current (I_{IK})		$V_{CCA} = 1.65V$ to 1.95V	± 6 mA				
$V_I < 0V$	-50 mA	$V_{CCB} = 3.0V$ to 3.6V	± 24 mA				
DC Output Diode Current (I_{OK})		$V_{CCB} = 2.3V$ to 2.7V	± 18 mA				
$V_O < 0V$	-50 mA	Free Air Operating Temperature (T_A)	-40°C to +85°C				
$V_O > V_{CC}$	+50 mA	Minimum Input Edge Rate ($\Delta t/\Delta V$)					
DC Output Source/Sink Current (I_{OH}/I_{OL})	± 50 mA	$V_{IN} = 0.8V$ to 2.0V, $V_{CC} = 3.0V$	10 ns/V				
DC V_{CC} or Ground Current	± 100 mA	Note 2: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.					
Supply Pin (I_{CC} or Ground)		Note 3: I_O Absolute Maximum Rating must be observed.					
Storage Temperature (T_{STG})	-65°C to +150°C	Note 4: Unused inputs or I/O pins must be held HIGH or LOW. They may not float.					
		Note 5: Operation requires: $V_{CCA} \leq V_{CCB}$					
DC Electrical Characteristics (1.65V < $V_{CCA} \leq 1.95V$, 2.3V < $V_{CCB} \leq 2.7V$)							
Symbol	Parameter	Conditions	V_{CCA} (V)	V_{CCB} (V)	Min	Max	Units
V_{IHA}	HIGH Level Input Voltage	A_n	1.65–1.95	2.3–2.7	$0.65 \times V_{CC}$		V
V_{IHB}		B_n , T/\overline{R} , \overline{OE}	1.65–1.95	2.3–2.7	1.6		V
V_{ILA}	LOW Level Input Voltage	A_n	1.6–1.95	2.3–2.7		$0.35 \times V_{CC}$	V
V_{ILB}		B_n , T/\overline{R} , \overline{OE}	1.65–1.95	2.3–2.7		0.7	V
V_{OHA}	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$ $I_{OH} = -6 mA$	1.65–1.95 1.65	2.3–2.7 2.3–2.7	$V_{CCA}-0.2$ 1.25		V
V_{OHB}	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$ $I_{OH} = -18 mA$	1.65–1.95 1.65–1.95	2.3–2.7 2.3	$V_{CCB}-0.2$ 1.7		V
V_{OLA}	LOW Level Output Voltage	$I_{OL} = 100 \mu A$ $I_{OL} = 6 mA$	1.65–1.95 1.65	2.3–2.7 2.3–2.7		0.2 0.3	V
V_{OLB}	LOW Level Output Voltage	$I_{OL} = 100 \mu A$ $I_{OL} = 18 mA$	1.65–1.95 1.65–1.95	2.3–2.7 2.3		0.2 0.6	V
I_I	Input Leakage Current @ \overline{OE} , T/\overline{R}	$0V \leq V_I \leq 3.6V$	1.65–1.95	2.3–2.7		± 5.0	μA
I_{OZ}	3-STATE Output Leakage	$0V \leq V_O \leq 3.6V$ $\overline{OE} = V_{CCB}$ $V_I = V_{IH}$ or V_{IL}	1.65–1.95	2.3–2.7		± 10	μA
I_{OFF}	Power OFF Leakage Current	$0 \leq (V_I, V_O) \leq 3.6V$	0	0		10	μA
$I_{CCA/I_{CCB}}$	Quiescent Supply Current, per supply, V_{CCA} / V_{CCB}	$A_n = V_{CCA}$ or GND				20	μA
		B_n , \overline{OE} , and $T/\overline{R} = V_{CCB}$ or GND	1.65–1.95	2.3–2.7			
ΔI_{CC}	Increase in I_{CC} per Input, B_n , T/\overline{R} , \overline{OE}	$V_I = V_{CCB} - 0.6V$	1.65–1.95	2.3–2.7		750	μA
		$V_I = V_{CCA} - 0.6V$	1.65–1.95	2.3–2.7		750	μA

74VCX164245

DC Electrical Characteristics ($1.65V < V_{CCA} \leq 1.95V$, $3.0V < V_{CCB} \leq 3.6V$)

Symbol	Parameter	Conditions	V_{CCA} (V)	V_{CCB} (V)	Min	Max	Units
V_{IHA}	HIGH Level Input Voltage	A_n B_n , T/\bar{R} , \overline{OE}	1.65–1.95	3.0–3.6	$0.65 \times V_{CC}$		V
V_{IHB}			1.65–1.95	3.0–3.6	2.0		V
V_{ILA}	LOW Level Input Voltage	A_n B_n , T/\bar{R} , \overline{OE}	1.65–1.95	3.0–3.6		$0.35 \times V_{CC}$	V
V_{ILB}			1.65–1.95	3.0–3.6		0.8	V
V_{OHA}	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$ $I_{OH} = -6 mA$	1.65–1.95 1.65	3.0–3.6 3.0–3.6	$V_{CCA} - 0.2$ 1.25		V
V_{OHB}	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$ $I_{OH} = -24 mA$	1.65–1.95 1.65–1.95	3.0–3.6 3.0	$V_{CCA} - 0.2$ 2.2		V
V_{OLA}	LOW Level Output Voltage	$I_{OL} = 100 \mu A$ $I_{OL} = 6 mA$	1.65–1.95 1.65	3.0–3.6 3.0–3.6		0.2 0.3	V
V_{OLB}	LOW Level Output Voltage	$I_{OL} = 100 \mu A$ $I_{OL} = 24 mA$	1.65–1.95 1.65–1.95	3.0–3.6 3.0		0.2 0.55	V
I_I	Input Leakage Current @ \overline{OE} , T/\bar{R}	$0V \leq V_I \leq 3.6V$	1.65–1.95	3.0–3.6		± 5.0	μA
I_{OZ}	3-STATE Output Leakage	$0V \leq V_O \leq 3.6V$ $OE^* = V_{CCB}$ $V_I = V_{IH}$ or V_{IL}	1.65–1.95	3.0–3.6		± 10	μA
I_{OFF}	Power Off Leakage Current	$0 \leq (V_I, V_O) \leq 3.6V$	0	0		10	μA
I_{CCA}/I_{CCB}	Quiescent Supply Current, per supply, V_{CCA}/V_{CCB}	$A_n = V_{CCA}$ or GND B_n , \overline{OE} , & $T/\bar{R} = V_{CCB}$ or GND	1.65–1.95	3.0–3.6		20	μA
		$V_{CCA} \leq A_n \leq 3.6V$ $V_{CCB} \leq B_n$, \overline{OE} , $T/\bar{R} \leq 3.6V$	1.65–1.95	3.0–3.6		± 20	μA
ΔI_{CC}	Increase in I_{CC} per Input, B_n , T/\bar{R} , \overline{OE}	$V_I = V_{CCB} - 0.6V$	1.65–1.95	3.0–3.6		750	μA
	Increase in I_{CC} per Input, A_n	$V_I = V_{CCA} - 0.6V$	1.65–1.95	3.0–3.6		750	μA

DC Electrical Characteristics ($2.3V < V_{CCA} \leq 2.7V$, $3.0V \leq V_{CCB} \leq 3.6V$)

Symbol	Parameter	Conditions	V_{CCA} (V)	V_{CCB} (V)	Min	Max	Units
V_{IHA}	HIGH Level Input Voltage	A_n B_n , T/\bar{R} , \overline{OE}	2.3–2.7	3.0–3.6	1.6		V
V_{IHB}			2.3–2.7	3.0–3.6	2.0		V
V_{ILA}	LOW Level Input Voltage	A_n B_n , T/\bar{R} , \overline{OE}	2.3–2.7	3.0–3.6		0.7	V
V_{ILB}			2.3–2.7	3.0–3.6		0.8	V
V_{OHA}	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$ $I_{OH} = -18 mA$	2.3–2.7 2.3	3.0–3.6 3.0–3.6	$V_{CCA} - 0.2$ 1.7		V
V_{OHB}	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$ $I_{OH} = -24 mA$	2.3–2.7 2.3–2.7	3.0–3.6 3.0	$V_{CCB} - 0.2$ 2.2		V
V_{OLA}	LOW Level Output Voltage	$I_{OL} = 100 \mu A$ $I_{OL} = 18 mA$	2.3–2.7 2.3	3.0–3.6 3.0–3.6		0.2 0.6	V
V_{OLB}	LOW Level Output Voltage	$I_{OL} = 100 \mu A$ $I_{OL} = 24 mA$	2.3–2.7 2.3–2.7	3.0–3.6 3.0		0.2 0.55	V
I_I	Input Leakage Current @ \overline{OE} , T/\bar{R}	$0V \leq V_I \leq 3.6V$	2.3–2.7	3.0–3.6		± 5.0	μA
I_{OZ}	3-STATE Output Leakage @ A_n	$0V \leq V_O \leq 3.6V$ $\overline{OE} = V_{CCA}$ $V_I = V_{IH}$ or V_{IL}	2.3–2.7	3.0–3.6		± 10	μA
I_{OFF}	Power OFF Leakage Current	$0 \leq (V_I, V_O) \leq 3.6V$	0	0		10	μA
I_{CCA}/I_{CCB}	Quiescent Supply Current, per supply, V_{CCA}/V_{CCB}	$A_n = V_{CCA}$ or GND B_n , \overline{OE} , & $T/\bar{R} = V_{CCB}$ or GND	2.3–2.7	3.0–3.6		20	μA
		$V_{CCA} \leq A_n \leq 3.6V$ $V_{CCB} \leq B_n$, \overline{OE} , $T/\bar{R} \leq 3.6V$	2.3–2.7	3.0–3.6		± 20	μA
ΔI_{CC}	Increase in I_{CC} per Input, B_n , T/\bar{R} , \overline{OE}	$V_I = V_{CCB} - 0.6V$	2.3–2.7	3.0–3.6		750	μA
	Increase in I_{CC} per Input, A_n	$V_I = V_{CCA} - 0.6V$	2.3–2.7	3.0–3.6		750	μA

AC Electrical Characteristics

Symbol	Parameter	$C_L = 30 \text{ pF}$, $R_L = 500\Omega$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$,						Units	
		$V_{CCA} = 1.65\text{V}$ to 1.95V		$V_{CCA} = 1.65\text{V}$ to 1.95V		$V_{CCA} = 2.3\text{V}$ to 2.7V			
		$V_{CCB} = 2.3\text{V}$ to 2.7V	$V_{CCB} = 3.0\text{V}$ to 3.6V	$V_{CCB} = 3.0\text{V}$ to 3.6V	$V_{CCB} = 3.0\text{V}$ to 3.6V	$V_{CCB} = 3.0\text{V}$ to 3.6V	$V_{CCB} = 3.0\text{V}$ to 3.6V		
t_{PHL}, t_{PLH}	Prop Delay, A to B	0.8	5.5	0.6	5.1	0.6	4.0	ns	
t_{PHL}, t_{PLH}	Prop Delay, B to A	1.5	5.8	1.5	6.2	0.8	4.4	ns	
t_{PZL}, t_{PZH}	Output Enable Time, OE to B	0.8	5.3	0.6	5.1	0.6	4.0	ns	
t_{PZL}, t_{PZH}	Output Enable Time, OE to A	1.5	8.3	1.5	8.2	0.8	4.6	ns	
t_{PLZ}, t_{PHZ}	Output Disable Time, OE to B	0.8	5.2	0.8	5.6	0.8	4.8	ns	
t_{PLZ}, t_{PHZ}	Output Disable Time, OE to A	0.8	4.6	0.8	4.5	0.8	4.4	ns	
t_{osHL} t_{osLH}	Output to Output Skew (Note 6)		0.5		0.5		0.75	ns	

Note 6: Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t_{osHL}) or LOW-to-HIGH (t_{osLH}).

Dynamic Switching Characteristics

Symbol	Parameter	Conditions	V_{CCA} (V)	V_{CCB} (V)	$T_A = 25^\circ\text{C}$ Typical	Units
V_{OLP}	Quiet Output Dynamic Peak V_{OL} , B to A	$C_L = 30 \text{ pF}$, $V_{IH} = V_{CC}$, $V_{IL} = 0\text{V}$	1.8	2.5	0.25	V
			1.8	3.3	0.25	
			2.5	3.3	0.6	
	Quiet Output Dynamic Peak V_{OL} , A to B	$C_L = 30 \text{ pF}$, $V_{IH} = V_{CC}$, $V_{IL} = 0\text{V}$	1.8	2.5	0.6	V
V_{OLV}	Quiet Output Dynamic Valley V_{OL} , B to A	$C_L = 30 \text{ pF}$, $V_{IH} = V_{CC}$, $V_{IL} = 0\text{V}$	1.8	2.5	-0.25	V
			1.8	3.3	-0.25	
			2.5	3.3	-0.6	
	Quiet Output Dynamic Valley V_{OL} , A to B	$C_L = 30 \text{ pF}$, $V_{IH} = V_{CC}$, $V_{IL} = 0\text{V}$	1.8	2.5	-0.6	V
V_{OHV}	Quiet Output Dynamic Valley V_{OH} , A to B	$C_L = 30 \text{ pF}$, $V_{IH} = V_{CC}$, $V_{IL} = 0\text{V}$	1.8	2.5	1.7	V
			1.8	3.3	2.0	
			2.5	3.3	2.0	
	Quiet Output Dynamic Valley V_{OH} , B to A	$C_L = 30 \text{ pF}$, $V_{IH} = V_{CC}$, $V_{IL} = 0\text{V}$	1.8	2.5	1.3	V
			1.8	3.3	1.3	
			2.5	3.3	1.7	

Capacitance

Symbol	Parameter	Conditions	$T_A = +25^\circ\text{C}$	Units
			Typical	
C_{IN}	Input Capacitance	$V_{CCA} = 2.5\text{V}$, $V_{CCB} = 3.3\text{V}$, $V_I = 0\text{V}$ or $V_{CCA/B}$	5	pF
C_{IO}	Input/Output Capacitance	$V_{CCA} = 2.5\text{V}$, $V_{CCB} = 3.3\text{V}$, $V_I = 0\text{V}$ or $V_{CCA/B}$	6	pF
C_{PD}	Power Dissipation Capacitance	$V_{CCA} = 2.5\text{V}$, $V_{CCB} = 3.3\text{V}$, $V_I = 0\text{V}$ or $V_{CCA/B}$ $f = 10 \text{ MHz}$	20	pF

AC Loading and Waveforms

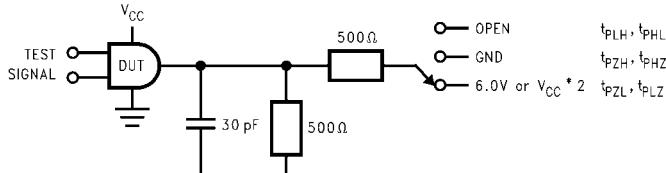


FIGURE 1. AC Test Circuit

TEST	SWITCH
t_{PLH}, t_{PHL}	OPEN
t_{PZL}, t_{PLZ}	6V at $V_{CC} = 3.3 \pm 0.3V$; $V_{CC} \times 2$ at $V_{CC} = 2.5 \pm 0.2V; 1.8V \pm 0.15V$
t_{PZH}, t_{PHZ}	GND

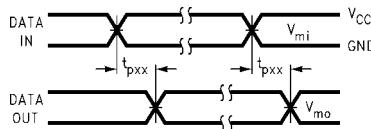
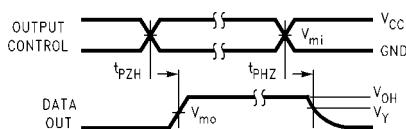
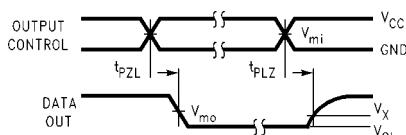



FIGURE 2. Waveform for Inverting and Non-inverting Functions

 $t_R = t_F \leq 2.0 \text{ ns, 10\% to 90\%}$ FIGURE 3. 3-STATE Output High Enable and Disable Times for Low Voltage Logic
 $t_R = t_F \leq 2.0 \text{ ns, 10\% to 90\%}$ FIGURE 4. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic
 $t_R = t_F \leq 2.0 \text{ ns, 10\% to 90\%}$


Symbol	V_{CC}		
	$3.3V \pm 0.3V$	$2.5V \pm 0.2V$	$1.8V \pm 0.15V$
V_{mi}	1.5V	$V_{CC}/2$	$V_{CC}/2$
V_{mo}	1.5V	$V_{CC}/2$	$V_{CC}/2$
V_X	$V_{OL} + 0.3V$	$V_{OL} + 0.15V$	$V_{OL} + 0.15V$
V_Y	$V_{OH} - 0.3V$	$V_{OH} - 0.15V$	$V_{OH} - 0.15V$

Physical Dimensions

inches (millimeters) unless otherwise noted

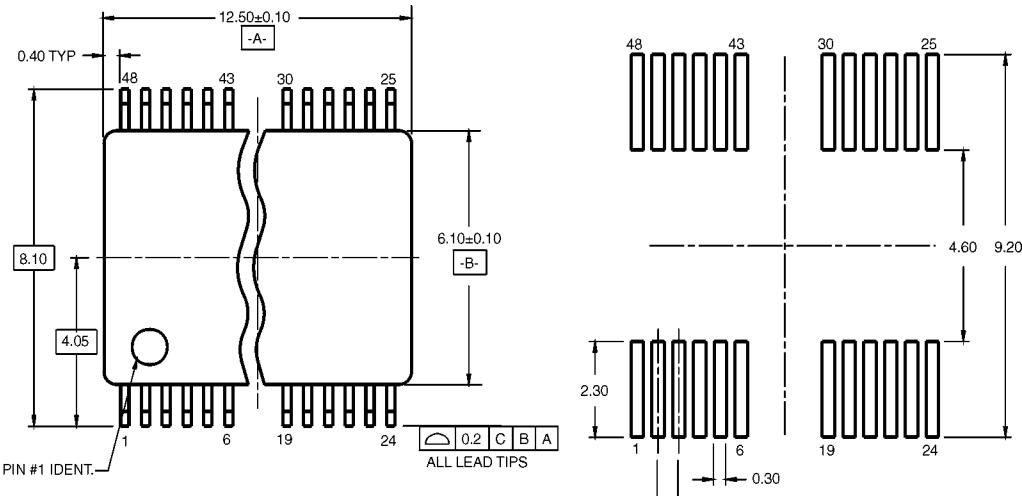

LAND PATTERN RECOMMENDATION

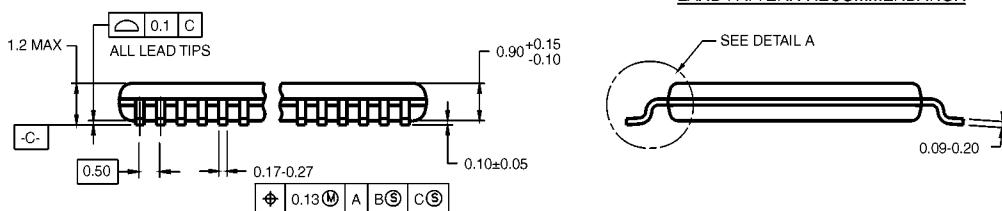


DIMENSIONS ARE IN MILLIMETERS

NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AB, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

MTD48RevB1

DETAIL A

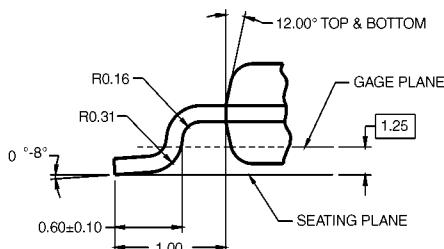

48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide
Package Number MTD48

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com