

International Rectifier

Data Sheet No. PD 96943A

IRIS-G5624A

Features

- Oscillator is provided on the monolithic control with adopting On-Chip Trimming technology.
 - Small temperature characteristics variation by adopting a comparator to compensate for temperature on the control part.
 - Low start-up circuit current (100uA max)
 - Built-in Active Low-Pass Filter for stabilizing the operation in case of light load
 - Avalanche energy guaranteed MOSFET with high VDSS
 - The built-in power MOSFET simplifies the surge absorption circuit since the MOSFET guarantees the avalanche energy.
 - No VDSS de-rating is required.
 - Indirect feed-back by built-in error amplifier on Vin terminal
 - Built-in constant voltage drive circuit
 - Built-in step drive circuit
 - Built-in low frequency PRC mode ($\approx 20\text{kHz}$)
 - Various kinds of protection functions
 - Pulse-by-pulse Overcurrent Protection (OCP)
 - Ovvervoltage Protection with latch mode (OVP)
 - Thermal Shutdown with latch mode (TSD)


Descriptions

IRIS-G5624A is a hybrid IC consists from power MOSFET and a controller IC, designed for Indirect feed-back Quasi-Resonant (including low frequency PRC) fly-back converter type SMPS (Switching Mode Power Supply) applications. This IC realizes high efficiency, low noise, downsizing and standardizing of a power supply system reducing external components count and simplifying the circuit designs.

(Note). PRC is abbreviation of “Pulse Ratio Control” (On-width control with fixed OFF-time).

INTEGRATED SWITCHER

Package Outline

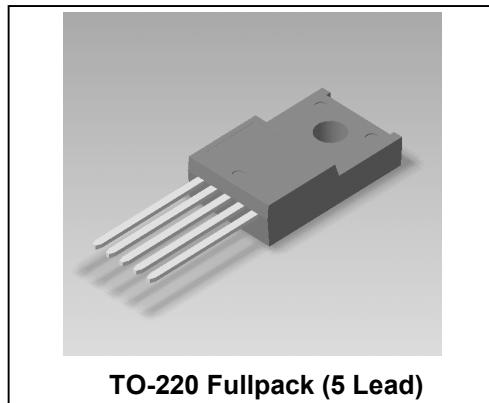


TO-220 Fullpack (5 Lead)

Key Specifications

Type	MOSFET VDSS(V)	RDS(ON) MAX	AC input(V)	Pout(W) Note 1
IRIS-G5624A	450	1.0Ω	$100 \pm 15\%$	90
			$120 \pm 15\%$	120

Note: The Pout (W) represents the thermal rating at Quasi-Resonant Operation, and the peak power output is obtained by approximately 120 to 140% of the above listed. When the output voltage is low and ON-duty is narrow, the Pout (W) shall become lower than that of above.

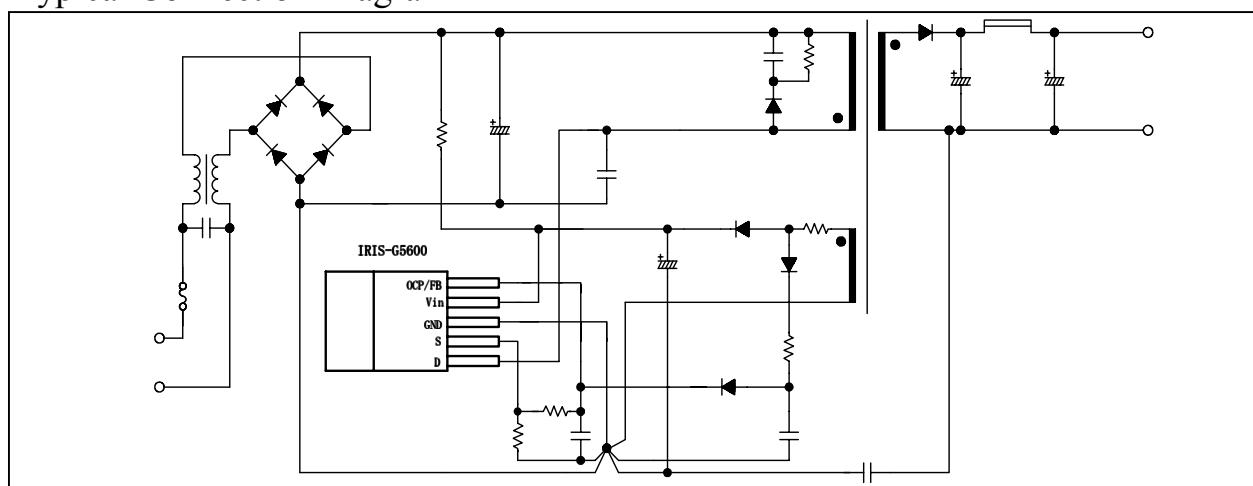

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to terminals stated, all currents are defined positive into any lead. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Terminals	Max. Ratings	Units	Note
IDpeak	Drain Current *1	1-2	14.4	A	Single Pulse
IDMAX	Maximum switching current *5	1-2	14.4	A	$V_{2-3}=0.78\text{V}$
					$T_a=-20\text{~}+\text{ }125^\circ\text{C}$
EAS	Single pulse avalanche energy *2	1-2	248	mJ	Single Pulse
					$V_{DD}=99\text{V}, L=20\text{mH}$ $I_{L\text{ peak}}=4.4\text{A}$
Vin	Input voltage for control part	4-3	35	V	
Vth	O.C.P/F.B Pin voltage	5-3	6	V	
PD1	Power dissipation for MOSFET *3	1-2	26	W	With infinite heatsink
			1.5	W	Without heatsink
PD2	Power dissipation for control part (Control IC) *4	4-3	0.8	W	Specified by $V_{in} \times I_{in}$
					Refer to recommended operating temperature
TF	Internal frame temperature in operation	-	-20 ~ +125	°C	
Top	Operating ambient temperature	-	-20 ~ +125	°C	
Tstg	Storage temperature	-	-40 ~ +125	°C	
Tch	Channel temperature	-	150	°C	

*1 Refer to MOS FET A.S.O curve

*2 MOS FET Tch-EAS curve

*3 Refer to MOS FET Ta-PD1 curve

*4 Refer to TF-PD2 curve for Control IC (See page 5)

*5 Maximum switching current.

The maximum switching current is the Drain current determined by the drive voltage of the IC and threshold voltage (Vth) of MOS FET. Therefore, in the event that voltage drop occurs between Pin 2 and Pin 3 due to patterning, the maximum switching current decreases as shown by V_{2-3} in Fig.1. Accordingly please use this device within the decrease value, referring to the derating curve of the maximum switching current.




Fig.1

Electrical Characteristics (for Control IC)


Electrical characteristics for control part ($T_a=25^\circ\text{C}$, $V_{in}=18\text{V}$, unless otherwise specified)

Symbol	Definition	Ratings			Units	Test Conditions
		MIN	TYP	MAX		
$V_{in(ON)}$	Operation start voltage	14.4	16	17.6	V	$V_{in}=0 \rightarrow 17.6\text{V}$
$V_{in(OFF)}$	Operation stop voltage	9	10	11	V	$V_{in}=17.6 \rightarrow 9\text{V}$
$I_{in(ON)}$	Circuit current in operation	-	-	20	mA	-
$I_{in(OFF)}$	Circuit current in non-operation	-	-	100	μA	$V_{in}=14\text{V}$
$T_{OFF(MAX)}$	Maximum OFF time	45	-	55	μsec	-
$T_{th(2)}$	Minimum time for input of quasi resonant signals *6	-	-	1	μsec	-
$T_{OFF(MIN)}$	Minimum OFF time *7	-	-	2	μsec	-
$V_{th(1)}$	O.C.P/F.B Pin threshold voltage 1	0.68	0.73	0.78	V	-
$V_{th(2)}$	O.C.P/F.B Pin threshold voltage 2	1.3	1.45	1.6	V	-
$I_{OCP/FB}$	O.C.P/F.B Pin extraction current	1.2	1.35	1.5	mA	-
$V_{in(OVP)}$	O.V.P operation voltage	34	36.5	39	V	$V_{in}=0 \rightarrow 39.0\text{V}$
$I_{in(H)}$	Latch circuit sustaining current *8	-	-	400	μA	$V_{in}=39.0 \rightarrow 8.5\text{V}$
$V_{in(La.OFF)}$	Latch circuit release voltage *8	6.6	-	8.4	V	$V_{in}=39.0 \rightarrow 6.6\text{V}$
$T_j(TSD)$	Thermal shutdown operating temperature	140	-	-	$^\circ\text{C}$	-
$V_{in(SENSE)}$	Detected Voltage	31.7	32	32.3	V	$V_{in}=31.7 \rightarrow 32.3\text{V}$
-	Temperature coefficient of detected voltage	-	2.5	-	mV/C	$V_{in}=31.7 \rightarrow 32.3\text{V}$

*6 Recommended operating conditions

Time for input of quasi resonant signals

For the quasi resonant signal inputted to OCP/FB Pin at the time of quasi resonant operation, the signal shall be wider than $T_{th(2)}$.

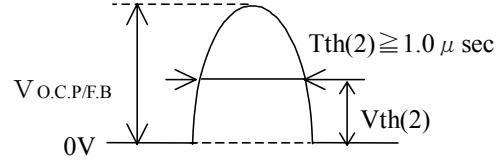

*7 The minimum OFF time means T_{OFF} width at the time when the minimum quasi resonant signal is inputted.

*8 The latch circuit means a circuit operated O.V.P and T.S.D.





Electrical Characteristics (for MOSFET)




($T_a=25^\circ\text{C}$) unless otherwise specified

Symbol	Definition	Ratings			Units	Test Conditions
		MIN	TYP	MAX		
V_{DSS}	Drain-to-Source breakdown voltage	450	-	-	V	$ID=300\mu\text{A}$ $V_{3-2}=0\text{V}(\text{short})$
$IDSS$	Drain leakage current	-	-	300	μA	$V_{DS}=450\text{V}$ $V_{3-2}=0\text{V}(\text{short})$
$R_{DS(ON)}$	On-resistance	-	-	1	Ω	$V_{3-2}=10\text{V}$ $ID=1.8\text{A}$
t_f	Switching time	-	-	250	nsec	-
θ_{ch-F}	Thermal resistance	-	-	2	$^\circ\text{C}/\text{W}$	Between channel and internal frame


IRIS-G5624A

International
IR Rectifier

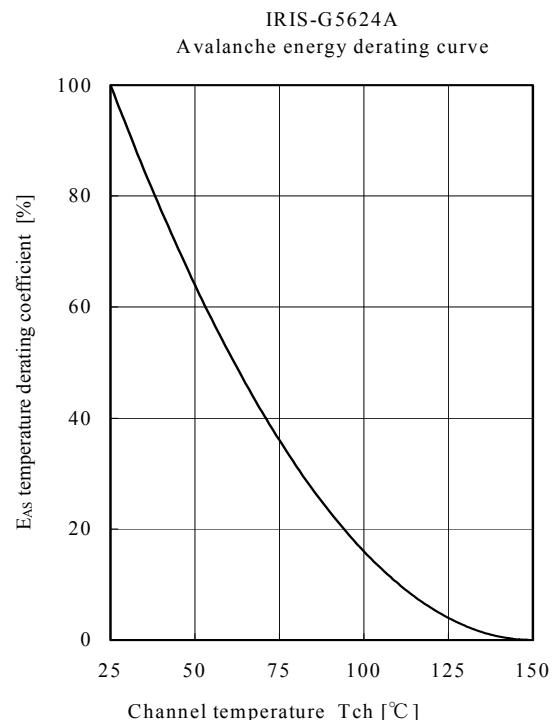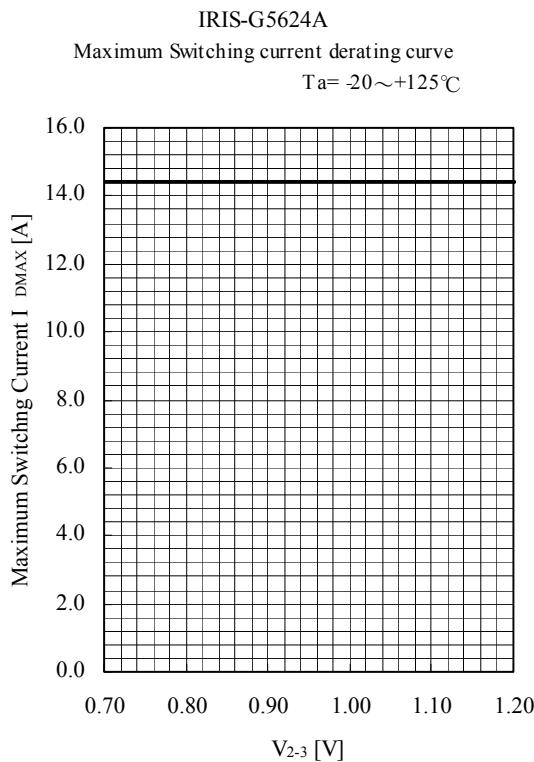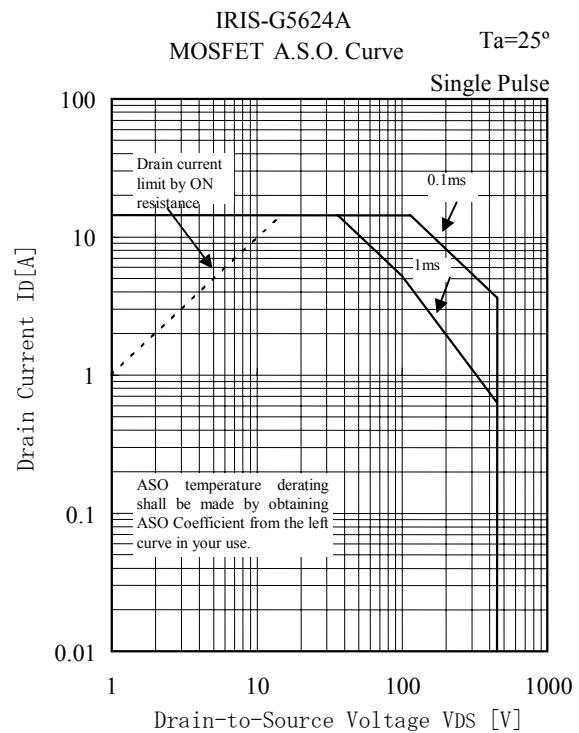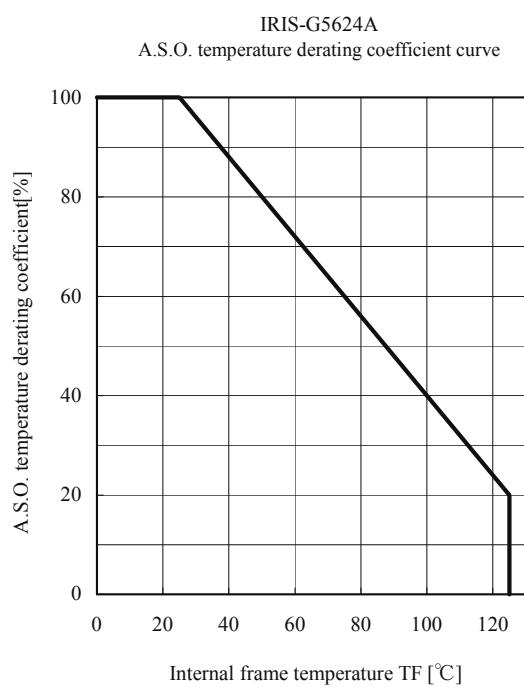


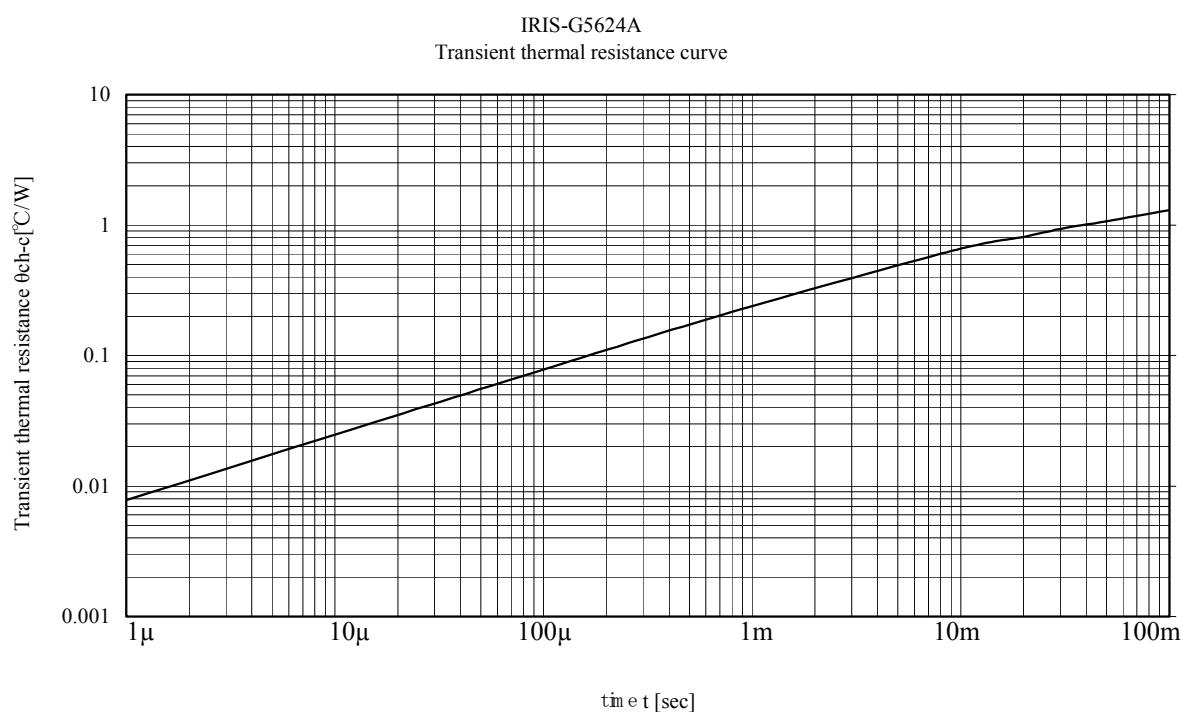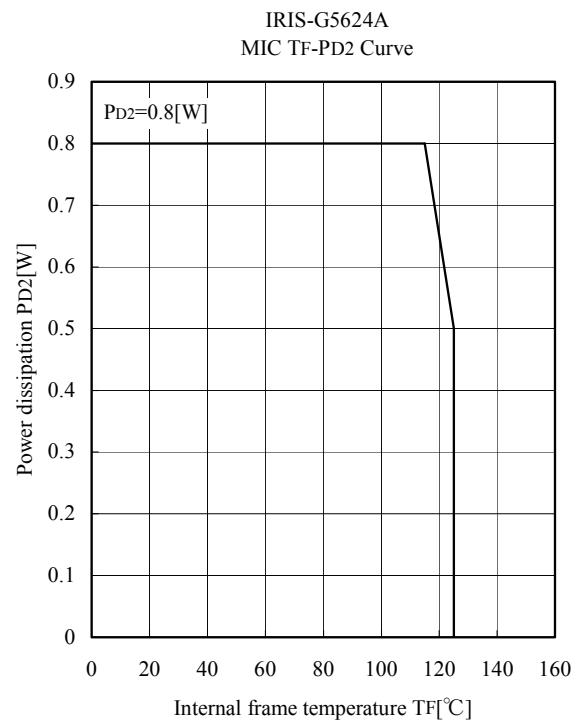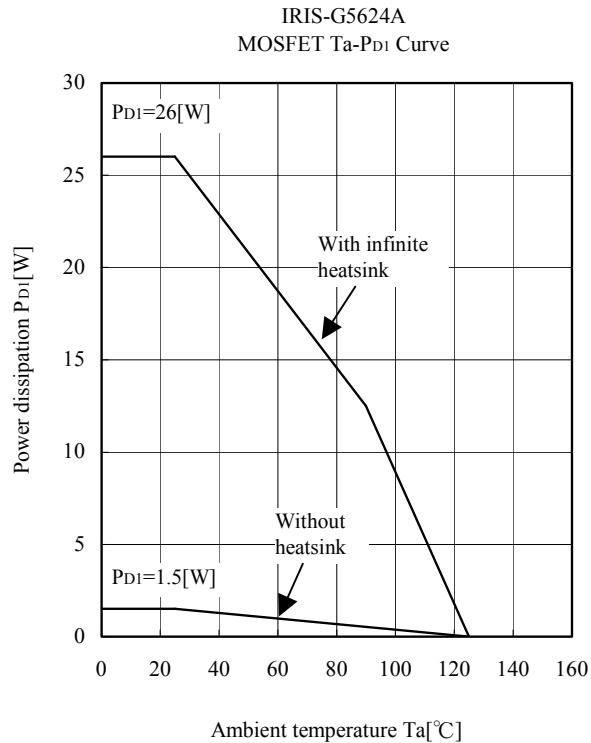

Block Diagram

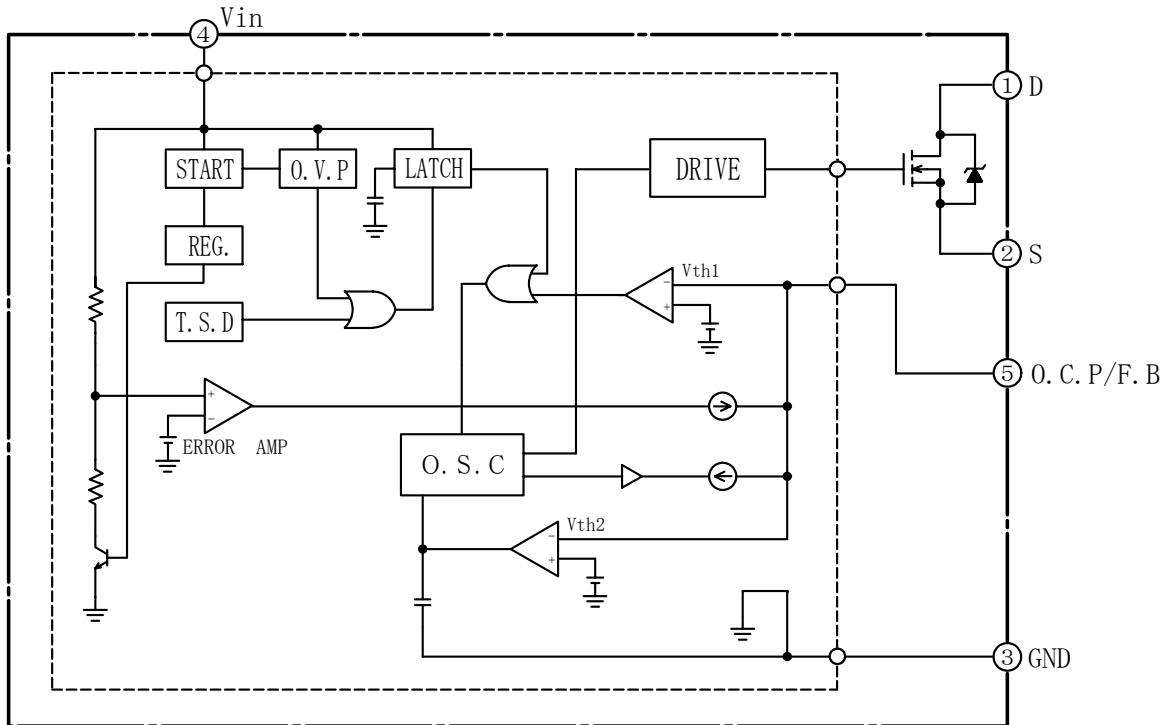

Lead Assignments




Pin No.	Symbol	Description	Function
1	D	Drain Pin	MOSFET drain
2	S	Source Pin	MOSFET source
3	GND	Ground Pin	Ground
4	Vin	Power supply Pin	Input of power supply for control circuit
5	OCP/FB	Overcurrent / Feedback Pin	Input of overcurrent detection signal / constant voltage control signal

Other Functions


O.V.P. – Overvoltage Protection Circuit

T.S.D. – Thermal Shutdown Circuit

SD – Step drive circuit



Case Outline

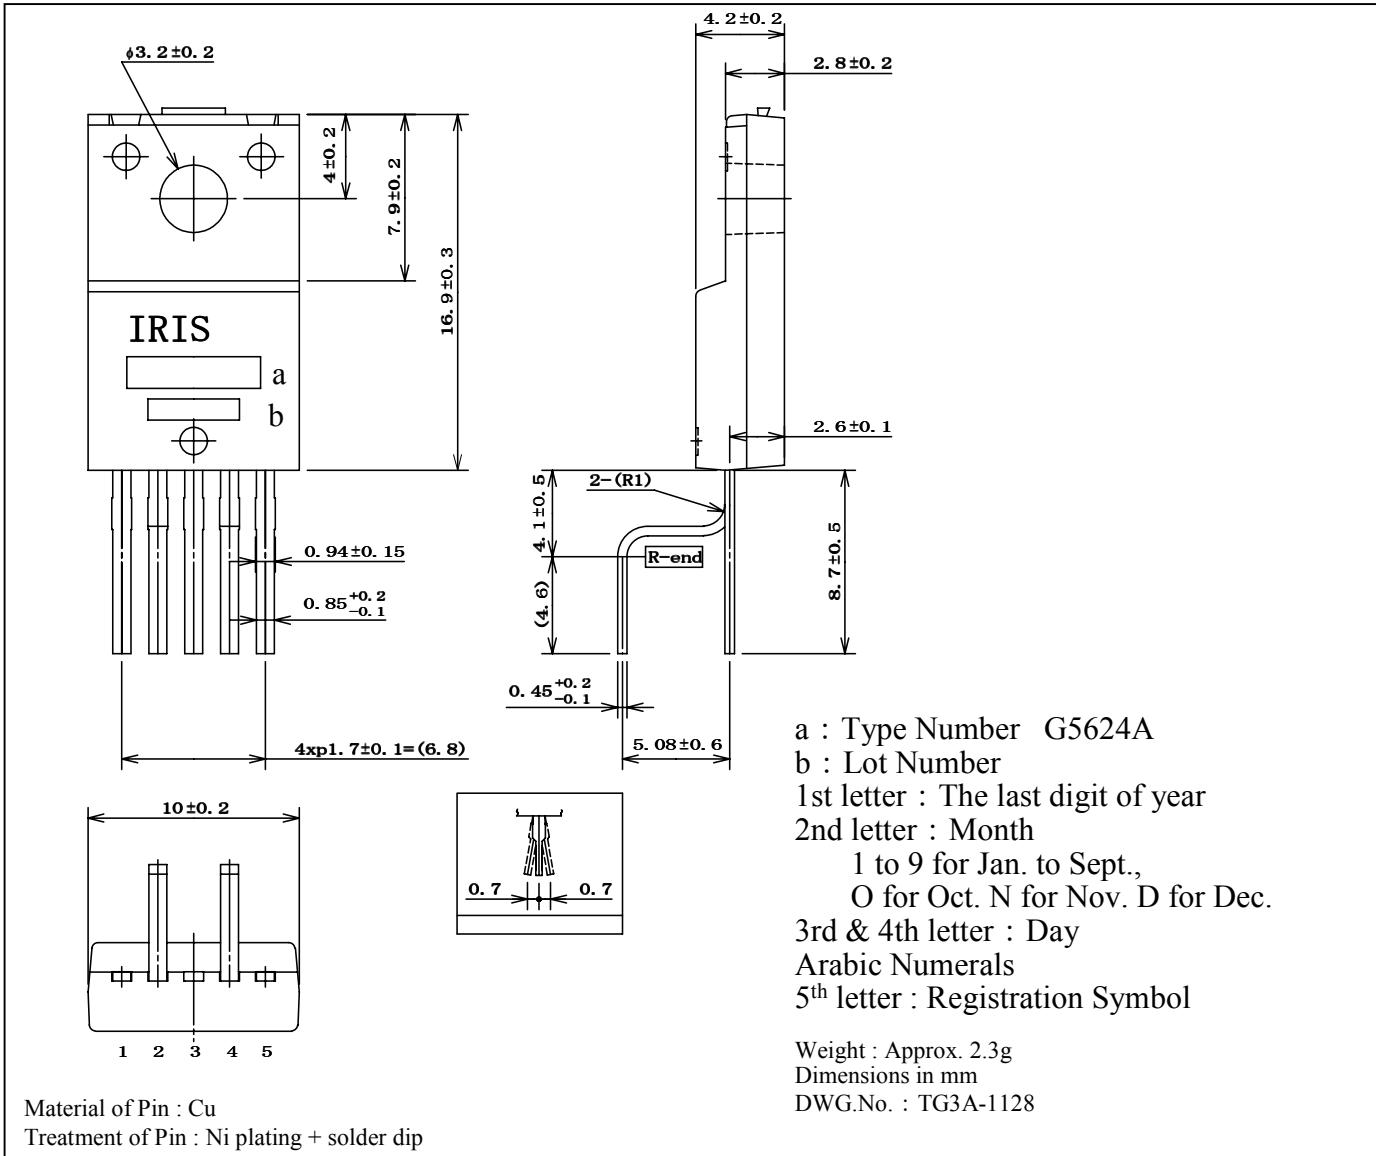

Data and specifications subject to change without notice.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC FAX: (310) 252-7903

Visit us at www.irf.com for sales contact information.