


Features

1. High isolation voltage (BV = 2500 Vrms)
2. Small and thin package (4pin SOP, Pin pitch 1.27mm)
3. High collector to emitter voltage (Vceo = 80 V)
4. High-speed switching (tr = 3 us TYP., tf = 5 us TYP.)

Applications


1. Programmable logic controllers
2. Measuring instruments
3. Power supply
4. Hybrid IC
5. Gaming machines

Outside Dimension:Unit (mm)

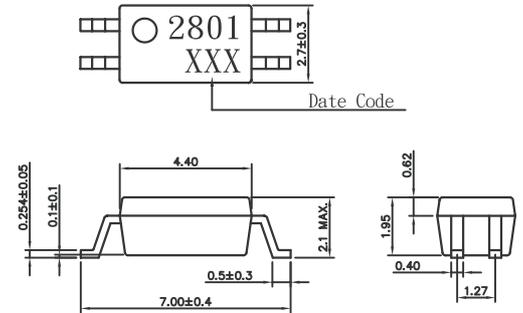

TOLERANCE ± 0.2mm

Schematic:Top View



Absolute Maximum Ratings

(Ta=25°C)

| | Parameter | Symbol | Rating | Unit |
|---------------------------------|------------------------------------|--------|-------------|-------|
| Input | Forward current (DC) | IF | 50 | mA |
| | Reverse voltage | VR | 6 | V |
| | Power dissipation derating | PD/°C | 0.6 | mW/°C |
| | Power dissipation | PD | 60 | mW |
| | Peak forward current ^{*1} | IFP | 1 | A |
| Output | Collector-emitter voltage | VCEO | 80 | V |
| | Emitter-collector voltage | VECO | 6 | V |
| | Collector current | IC | 50 | mA |
| | Power dissipation derating | PC | 1.2 | mW/°C |
| | Total power dissipation | Ptot | 120 | mW |
| Isolation voltage ^{*2} | | Viso | 2500 | Vrms |
| Operating temperature | | Topr | -30 to +100 | °C |
| Storage temperature | | Tstg | -55 to +125 | °C |

*1 PW=100us, Duty Cycle-1%

*2 AC voltage for 1 minute at TA=25°C, RH=60% between input and output.

Electro-optical Characteristics

(Ta=25°C)

| | Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------|--------------------------------------|----------|---------------------------|--------------------|------------------|------|------|
| Input | Forward voltage | VF | IF =5mA | — | 1.1 | 1.4 | V |
| | Reverse current | IR | VR =5V | — | — | 5 | uA |
| | Terminal capacitance | Ct | V=0V, f=1.0kHz | — | 30 | — | pF |
| Output | Collector dark current | ICEO | VCE =80V, IF =0mA | — | — | 100 | nA |
| Transfer characteristics | Current transfer ratio | CTR | IF =5mA, VCE=5V | 80 | — | 600 | % |
| | Collector-emitter saturation voltage | VCE(sat) | IF=10mA, IC=2mA | — | — | 0.3 | V |
| | Isolation resistance | RI-o | DC500V | 5X10 ¹⁰ | 10 ¹¹ | — | ohm |
| | Floating capacitance | CI-o | V=0V, f=1.0MHz | — | 0.4 | — | pF |
| | Response time(Rise) | tr | VCE=5V, IC=2mA, RL=100ohm | — | 3 | — | us |
| Response time(Fall) | tf | — | | 5 | — | | |

*1 Test circuit for switching time.

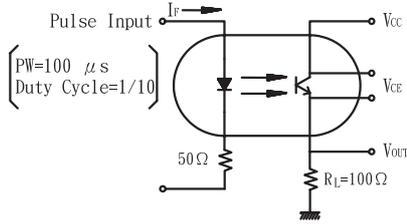


Fig.1 Current Transfer Ratio vs. Forward Current

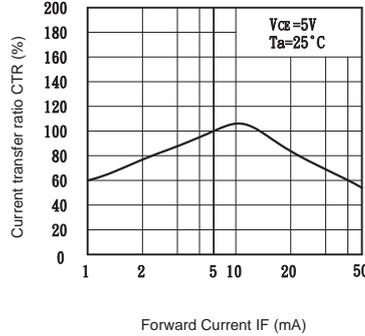


Fig.2 Collector Power Dissipation vs. Ambient Temperature

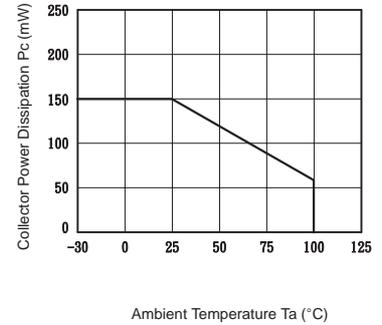


Fig.3 Collector Dark Current vs. Ambient Temperature

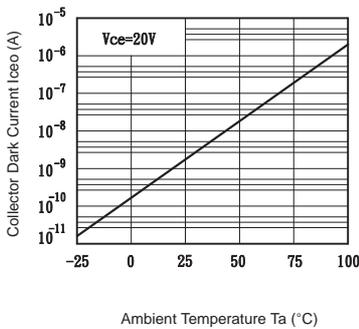


Fig.4 Forward Current vs. Ambient Temperature

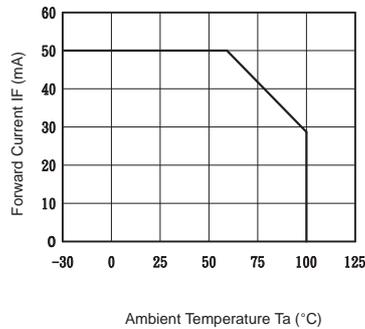


Fig.5 Forward Current vs. Forward Voltage

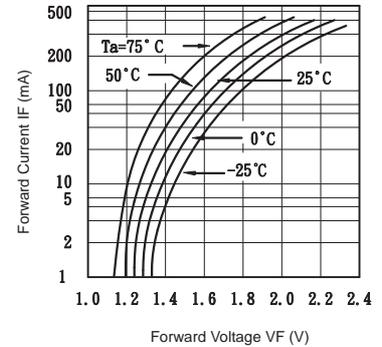


Fig.6 Collector Current vs. Collector-emitter Voltage

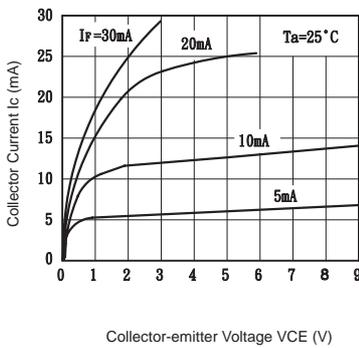


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

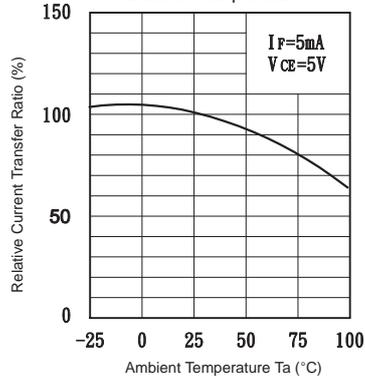


Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature

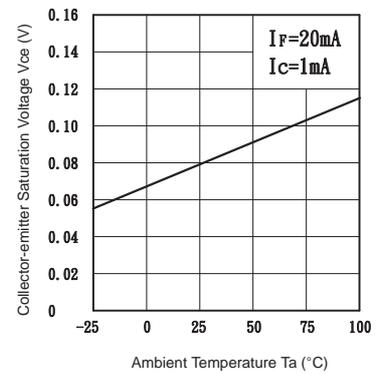


Fig.9 Collector-emitter Saturation Voltage vs. Forward Current

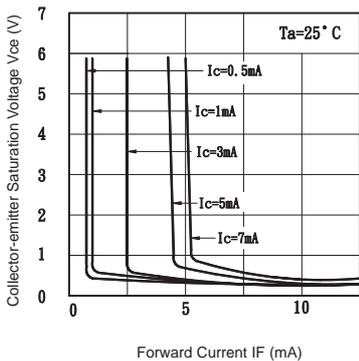


Fig.10 Response Time vs. Load Resistance

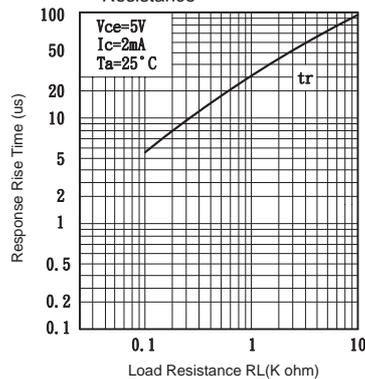


Fig.11 Response Time vs. Load Resistance

