

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input 0.6 Vdc - 5.0 Vdc/50 A Output

bel
POWER PRODUCTS

xRP2-50E1A0

RoHS Compliant

Rev.E

- Non-Isolated
- High Efficiency
- Fixed Switching Frequency
- Low Cost
- Excellent Thermal Performance
- Wide Input Voltage Range
- Wide Output Trim Range
- Output Over-Voltage Shutdown
- OCP/SCP
- Low Output Ripple
- Power Good Signal
- Remote On/Off



Description

The xRP2-50E1A0 is a non-isolated dc/dc converter that operates over a wide range of input voltage ($V_{in} = 5 \text{ Vdc} - 13.8 \text{ Vdc}$). This unit can provide a precisely regulated output voltage from 0.6 Vdc to 5.0 Vdc and can deliver up to 50 A of output current. This unit is designed to be highly efficient and low cost. The converter is provided in an industry standard package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency ($V_o=1.8 \text{ Vdc}$)	Part Number Horizontal Mount	Part Number Vertical Mount
0.6 V - 5.0 V	5.0 V - 13.8 V	50 A	250 W	86%	0RP2-50E1A0	VRP2-50E1A0

Notes: 1. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.
2. Add "G" suffix at the end of the model numbers listed above to indicate "Tray Packaging".

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Ambient Temperature	0 °C	-	70 °C	
Storage Temperature	-55 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
				$V_o \leq 2.8 \text{ V}$
	5 V	12 V	13.8 V	
				$V_o > 2.8 \text{ V}$
	1.8* V_o	12 V	13.8 V	
Input Current (full load)	-	-	38 A	
Input Reflected Ripple Current (pk-pk)	-	35 mA	-	With simulated source impedance of 1 uH, 5 Hz to 20 MHz. Use a 1000 uF/16 V electrolytic capacitor with ESR=0.1 ohm max, at 100 kHz at 25°C.
Input Reflected Ripple Current (rms)	-	10 mA	-	
I^2t Inrush Current Transient	-	-	1 A ² s	
Turn-on Voltage Threshold	4.4 V	4.6 V	4.8 V	
Under Voltage Threshold	4.0 V	4.3 V	4.6 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input

0.6 Vdc - 5.0 Vdc/50 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point Accuracy Vo ≥ 1 V Vo < 1 V	-1.5 % Vo -10 mV	- -	+1.5 % Vo +10 mV	Vin=Vinmin, Io=Iomax	
Load Regulation Vo ≥ 2.5 V Vo < 2.5 V	- -	- -	0.6% Vo 12 mV		
Line Regulation Vo ≥ 2.5 V Vo < 2.5 V	- -	- -	0.3% Vo 9 mV		
Regulation Over Temperature (0 °C to +70 °C)	-	-	0.02% Vo/C		
Output Current	0 A	-	50 A		
Current Limit Threshold	105% Io	130% Io	180% Io		
Output Ripple and Noise (pk-pk) Vo=5.0 V Vo=3.3 V Vo=2.5 V Vo=1.5 V Vo=1.0 V Vo=0.6 V	- - - - - -	- - - - - -	110 mV 100 mV 100 mV 80 mV 60 mV 60 mV	Test conditions: 0-20MHz BW, with a 1µF ceramic capacitor and a 10 uF Tantalum cap at output.	
Output Ripple and Noise (rms) Vo=5.0 V Vo=3.3 V Vo=2.5 V Vo=1.5 V Vo=1.0 V Vo=0.6 V	- - - - - -	- - - - - -	35 mV 35 mV 35 mV 30 mV 25 mV 25 mV		
Turn On Time	-	-	10 mS		
Rise Time	-	-	3 mS		
Overshoot at Turn on and off	-	-	0.5%		
Output Capacitance ESR ≥ 1 mΩ	0 uF	-	4700 uF		
Transient Response					
50% ~ 100% Max Load	Vo=All	-	-	300 mV	Test conditions: di/dt = 10 A/uS; Vin =12 V; Co=0 uF.
Settling Time		-	-	100 uS	
100% ~ 50% Max Load		-	-	300 mV	
Settling Time		-	-	100 uS	

Note: All specifications are typical at nominal input, full load at 25°C unless noted.

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input

0.6 Vdc - 5.0 Vdc/50 A Output

bel
POWER PRODUCTS

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	Vo=5.0 V	-	93%	-
	Vo=3.3 V	-	91%	-
	Vo=2.5 V	-	88%	-
	Vo=1.8 V	-	86%	-
	Vo=1.5 V	-	84%	-
	Vo=1.2 V	-	82%	-
	Vo=1.0 V	-	75%	-
	Vo=0.6 V	-	68%	-
Switching Frequency	-	330 kHz	-	
Output Voltage Trim Range	0.6 V	-	5 V	Trim pin is open, Vo = 0.6 V.
Over Voltage Protection	110% Vo,set	115%Vo,set	130%Vo,set	Vin=12 V, Io=full load.
MTBF	3,361,100 hours			Calculated Per Bell Core SR-332 (Io =40 A, Vo=1.92 V; Vin=12 V; Ta = 25 °C, 100LFM forced air flow.)
Dimensions (horizontal mount)	Inches (L x W x H)			
	1.45 x 1.1 x 0.783			
Dimensions (vertical mount)	Inches (L x W x H)			
	1.45 x 1.1 x 0.743			
Dimensions (horizontal mount)	Millimeters (L x W x H)			
	36.83 x 27.94 x 19.9			
Dimensions (vertical mount)	Millimeters (L x W x H)			
	36.83 x 27.94 x 18.87			
Weight	-	28.5 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.


Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off (Active High)				
Signal Low (Unit Off)	-0.3 V	-	0.8 V	Remote On/Off pin is open, unit is off.
Signal High (Unit On)	2 V	-	Vin,max	
Current Source/Sink	0 mA	-	3.3 mA	
PwGood (PowerGood)				
PwGood = High = Power Good	2.4 V	-	5.25 V	
	-	-	2 mA	
PwGood = Low = Power Not Good	0 V	-	0.4 V	
	-	-	4 mA	

Output Trim Equation

The Trim resistor should be connected between the Trim+ pin and Trim- pin.

$$R_{trim} = \frac{1.2}{V_o - 0.6} (K\Omega)$$

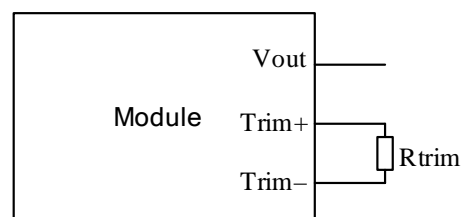







NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input

0.6 Vdc - 5.0 Vdc/50 A Output



Efficiency Data

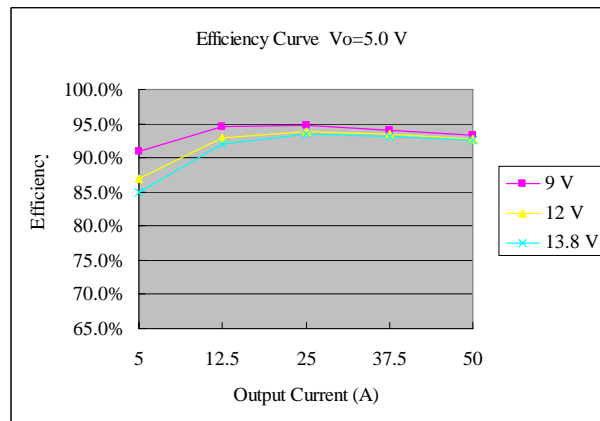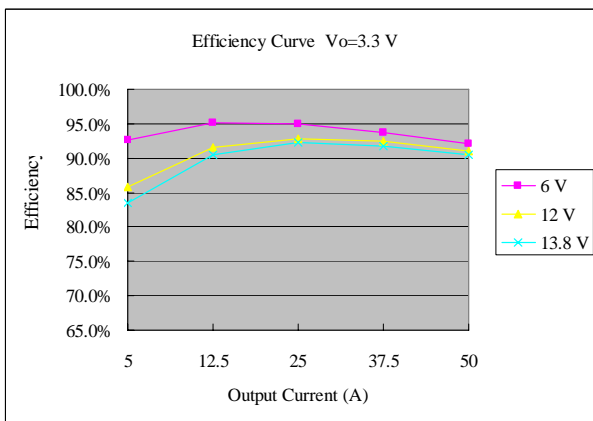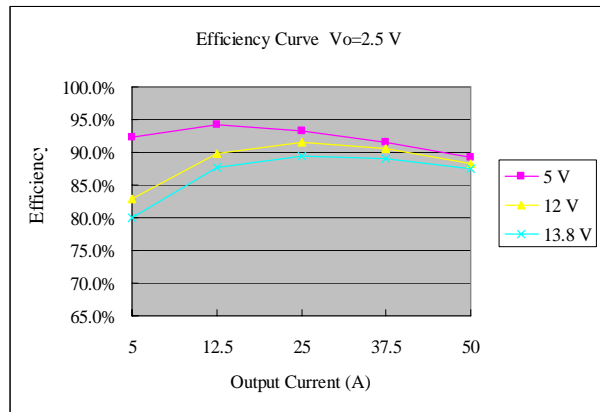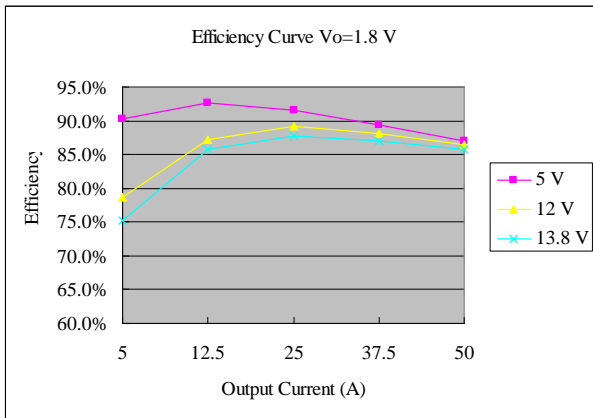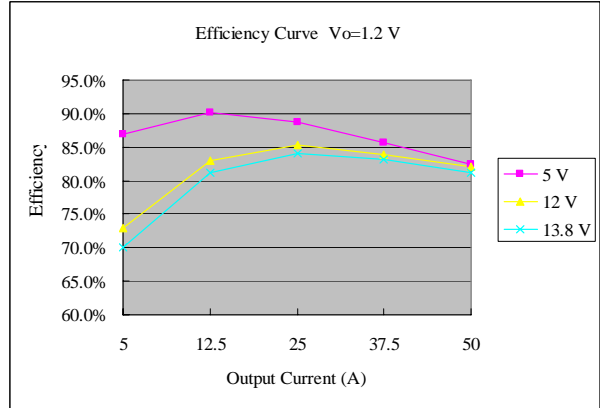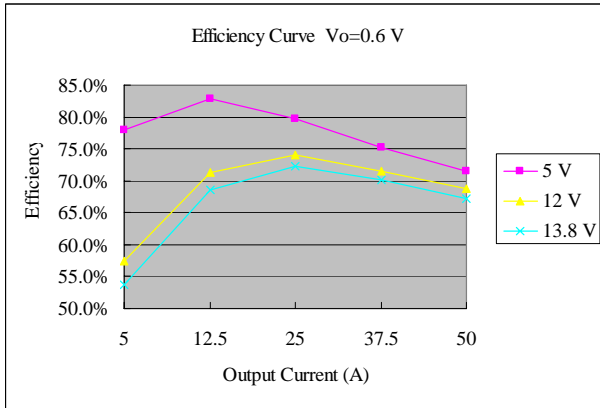


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/50 A Output




Thermal Derating Curve

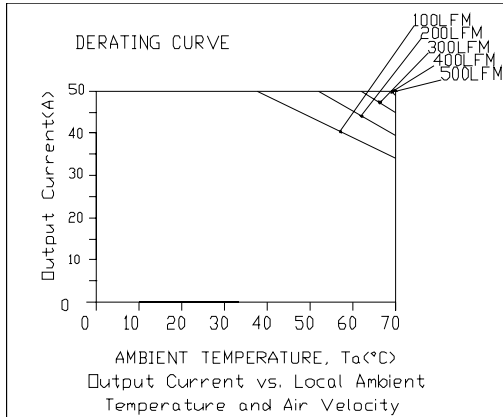


Vin=12 V, Vo=0.6 V

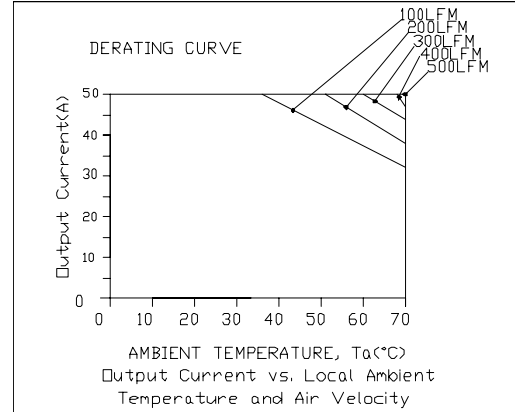


Vin=12 V, Vo=1.2 V

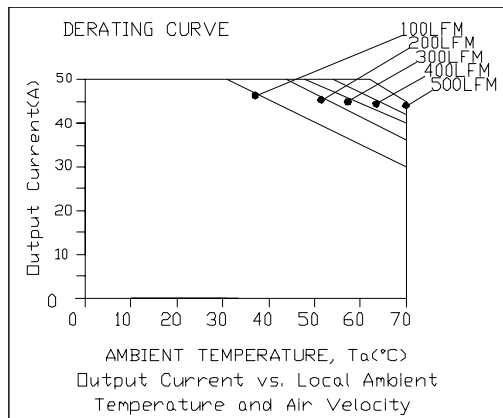


Vin=12 V, Vo=1.8 V

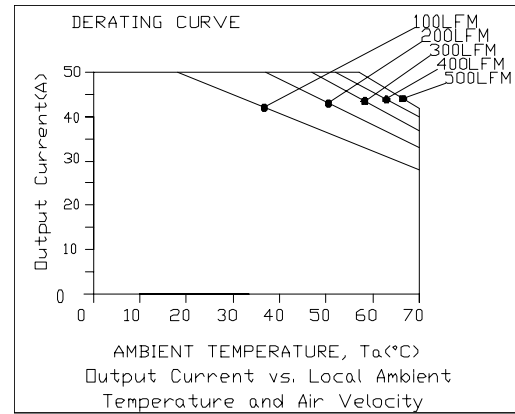

Vin=12 V, Vo=2.5 V

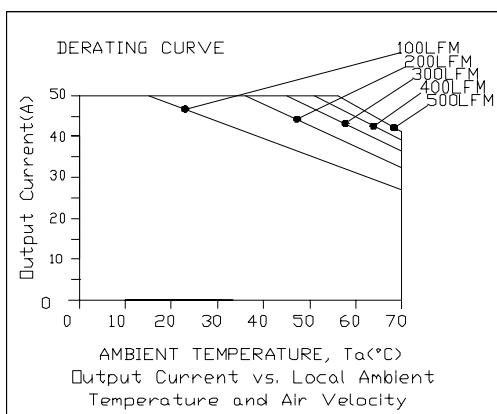

Vin=12 V, Vo=3.3 V

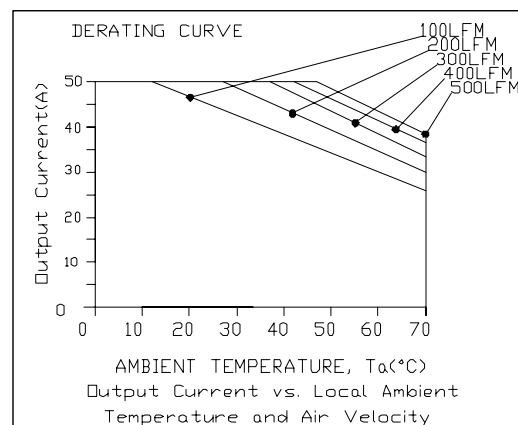

Vin=12 V, Vo=5.0 V

Note: Maximum junction temperature of semiconductors derated to 120C.


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/50 A Output




Ripple and Noise Waveforms

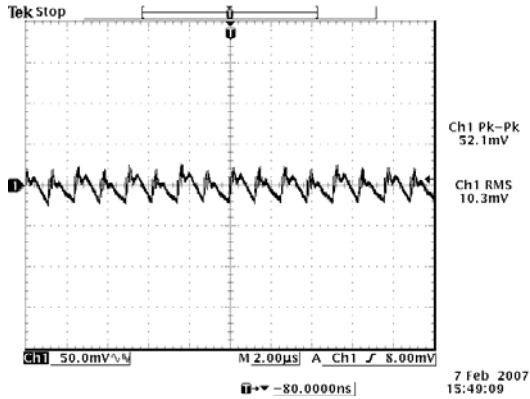


12 Vdc input, 0.6 Vdc/50 A output

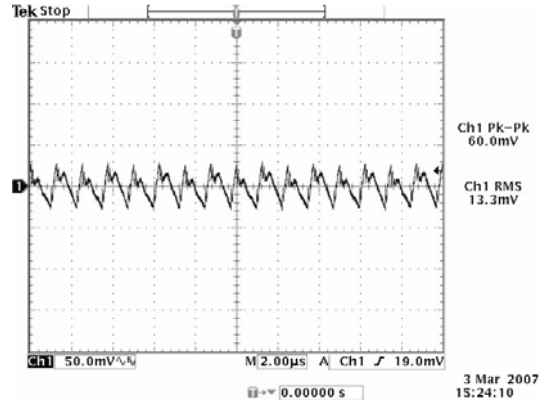


12 Vdc input, 1.2 Vdc/50 A output

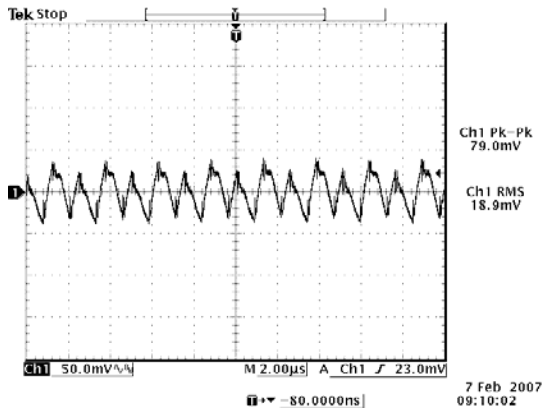


12 Vdc input, 1.8 Vdc/50 A output

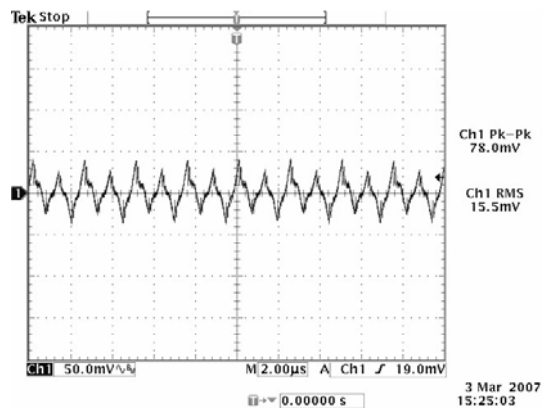

12 Vdc input, 2.5 Vdc/50 A output

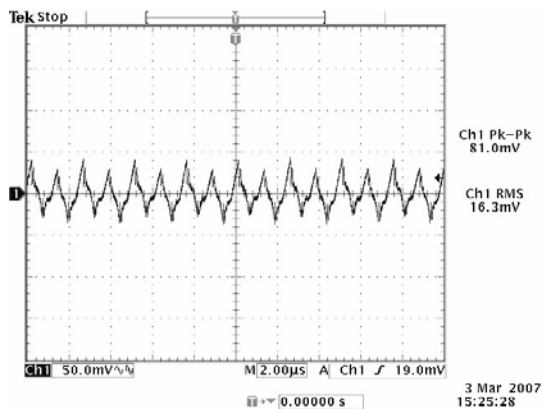

12 Vdc input, 3.3 Vdc/50 A output

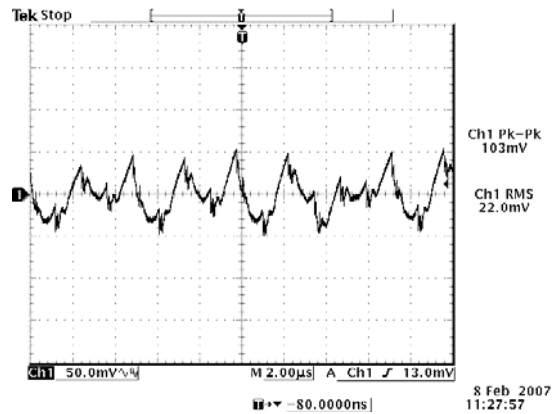

12 Vdc input, 5.0 Vdc/50 A output

Note: Ripple and noise at full load, 0-20 MHz BW, with a 10 μ F and a 1 μ F ceramic cap at the output, and $T_a=25$ deg C.


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input


0.6 Vdc - 5.0 Vdc/50 A Output




Transient Response Waveforms

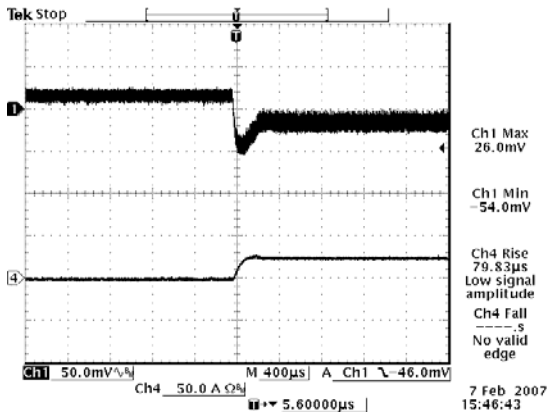


Vout= 0.6 V 0%-50% Load Transient

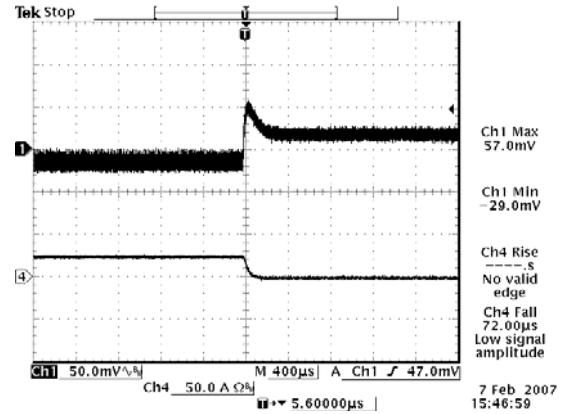


Vout=0.6 V 50%-0% Load Transient

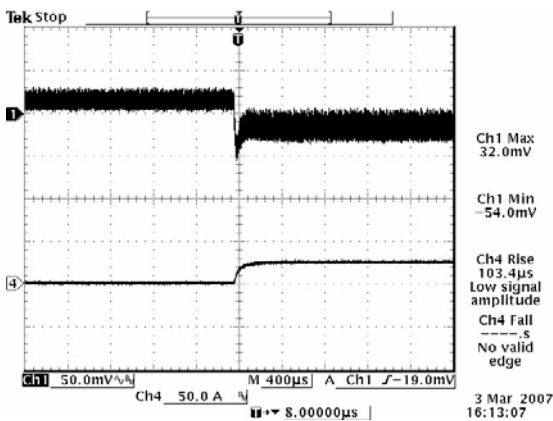


Vout=1.2 V 0%-50% Load Transient

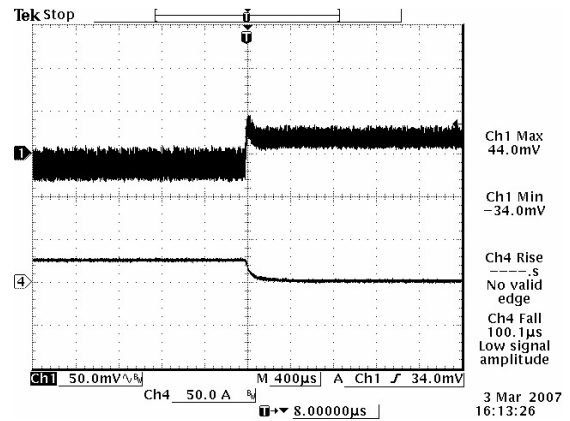

Vout=1.2 V 50%-0% Load Transient

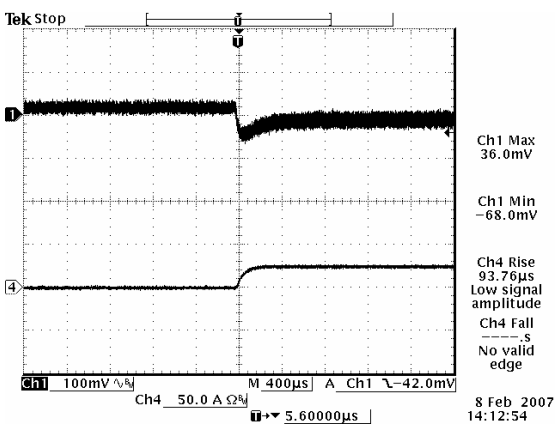

Vout=1.8 V 0%-50% Load Transient

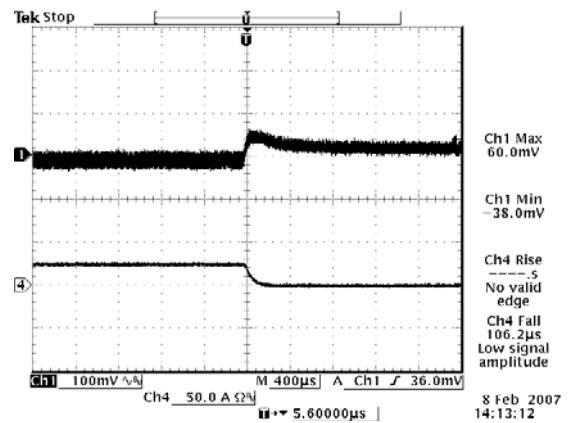


Vout=1.8 V 50%-0% Load Transient

NON-ISOLATED DC/DC CONVERTERS


5 Vdc - 13.8 Vdc Input 0.6 Vdc - 5.0 Vdc/50 A Output




Transient Response Waveforms (continued)

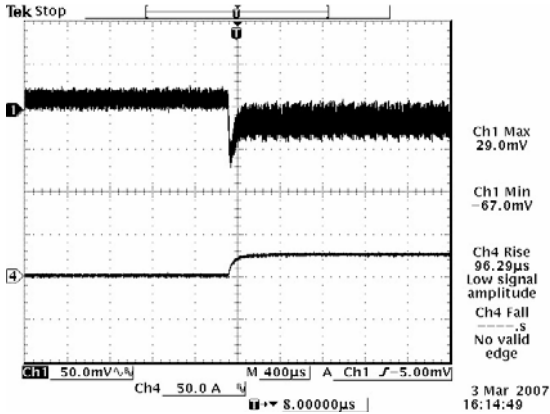


Vout=2.5 V 0%-50% Load Transient

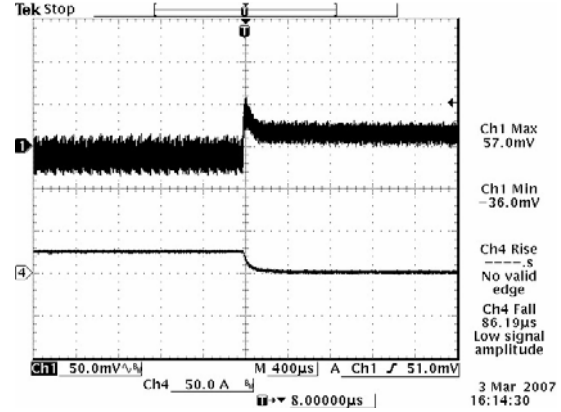


Vout=2.5 V 50%-0% Load Transient

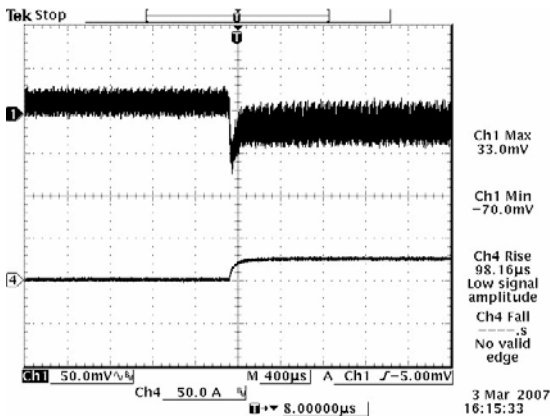


Vout=3.3 V 0%-50% Load Transient

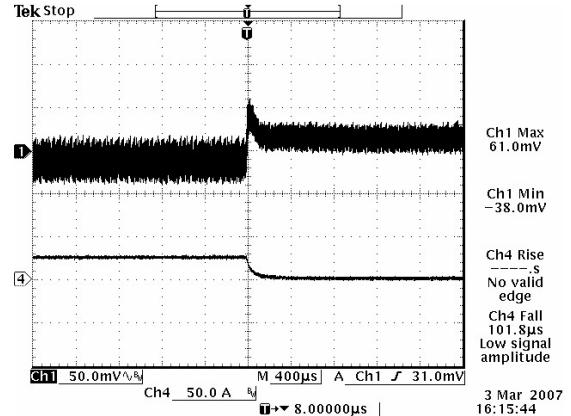

Vout=3.3 V 50%-0% Load Transient

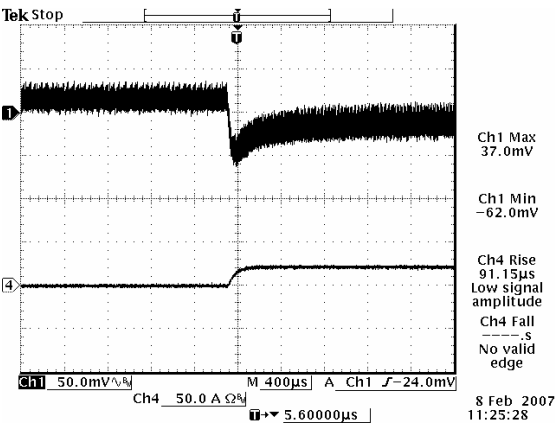

Vout=5 V 0%-50% Load Transient

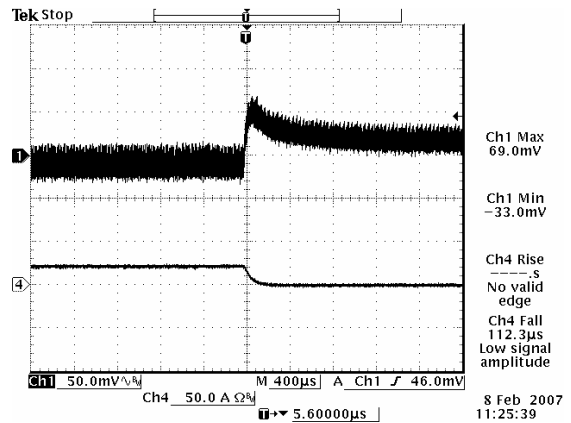

Vout=5 V 50%-0% Load Transient

Note: Transient response at di/dt = 10 A/µS, with external electrolytic cap 4700 µF, and Ta=25 deg C.

NON-ISOLATED DC/DC CONVERTERS




5 Vdc - 13.8 Vdc Input

0.6 Vdc - 5.0 Vdc/50 A Output



Mechanical Outline

0RP2-50E1A0

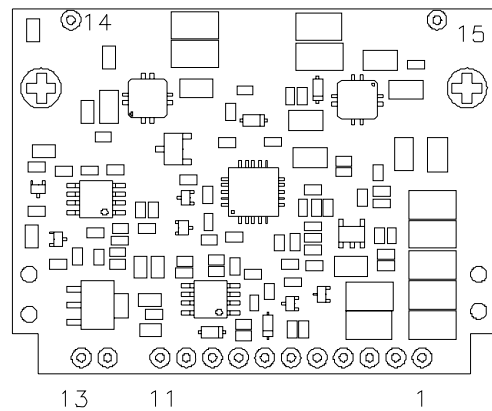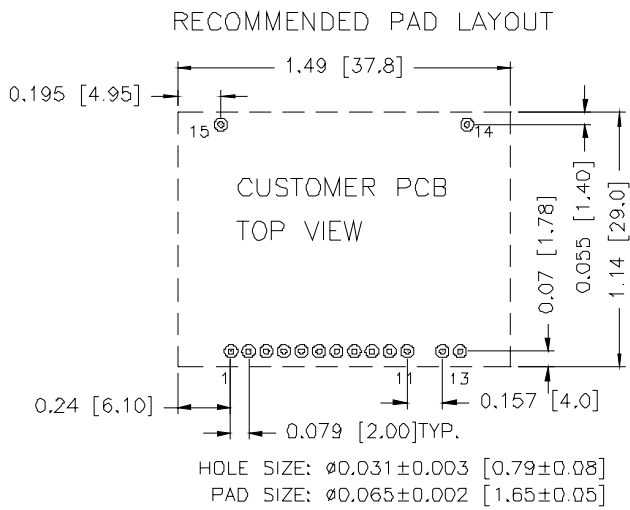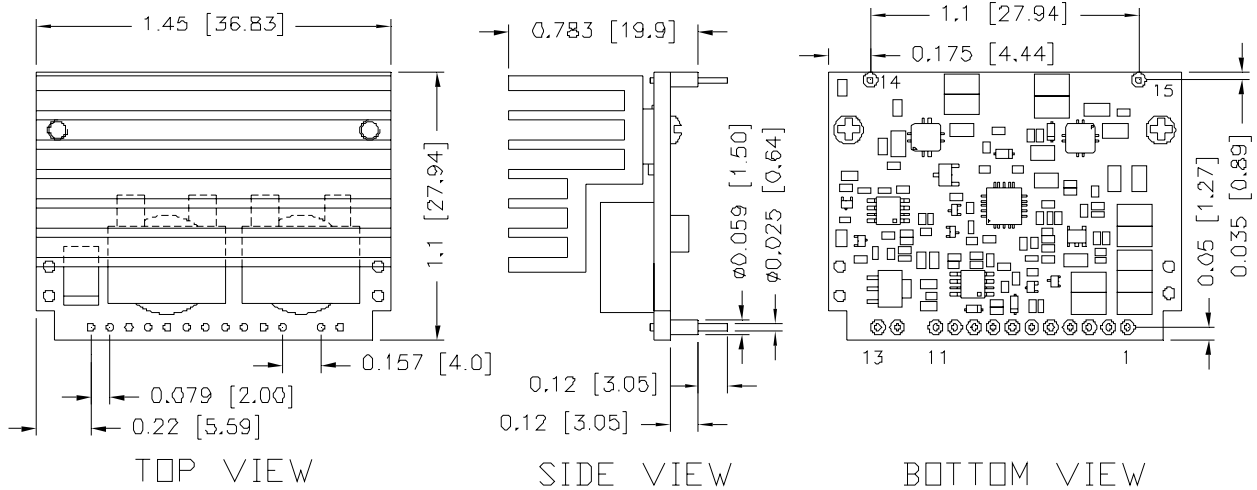

Pin Connections

Pin	Function	Pin	Function
1	Vout	9	PwGOOD
2	Vout	10	Sense-
3	Vout	11	Sense+
4	GND	12	Vin
5	GND	13	Vin
6	Enable	14	GND
7	Trim-	15	GND
8	Trim+		


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input 0.6 Vdc - 5.0 Vdc/50 A Output




Mechanical Outline (continued)

VRP2-50E1A0

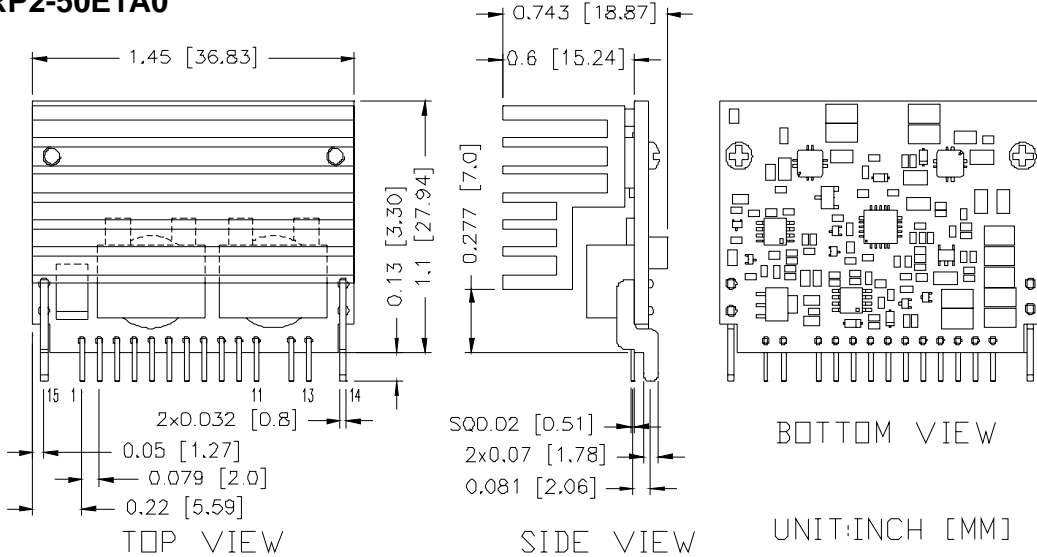

RECOMMENDED PAD LAYOUT

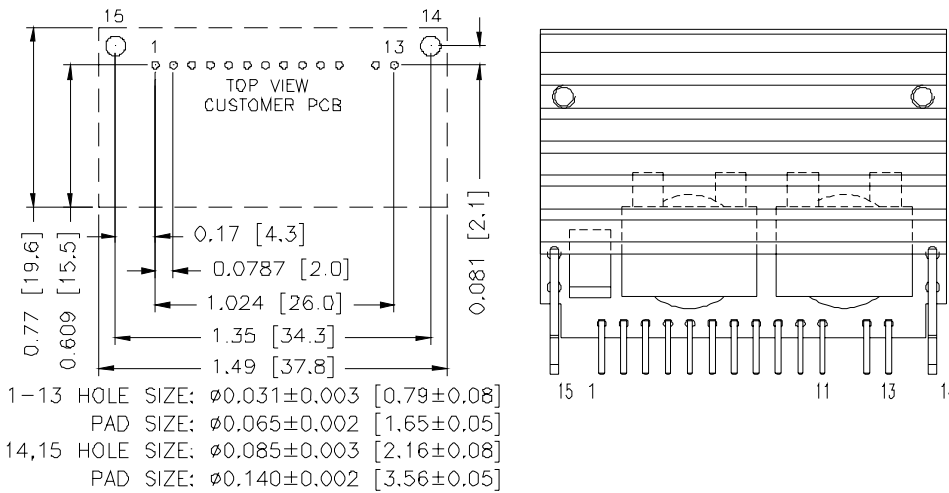

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	GND
5	GND
6	Enable
7	Trim-
8	Trim+
9	PwGOOD
10	Sense-
11	Sense+
12	Vin
13	Vin
14	GND
15	GND

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 080307

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F/ 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
www.belfuse.com