



**SANYO Semiconductors**

# DATA SHEET

## LC87F1HC8A — CMOS IC 128K-byte FROM and 16384-byte RAM integrated 8-bit 1-chip Microcontroller with USB-host controller

### Overview

The LC87F1HC8A is an 8-bit microcomputer that, centered around a CPU running at a minimum bus cycle time of 83.3ns, integrates on a single chip a number of hardware features such as 128K-byte flash ROM (onboard programmable), 16384-byte RAM, an on-chip debugger, a sophisticated 16-bit timer/counter (may be divided into 8-bit timers), a 16-bit timer (may be divided into 8-bit timers or PWMs), four 8-bit timers with a prescaler, a base timer serving as a time-of-day clock, 3 channels of synchronous SIO interface with automatic data transfer capabilities, an asynchronous/synchronous SIO interface, a UART interface (full duplex), a full-speed USB interface (host control function), an 8-bit 12-channel AD converter, 2 channels of 12-bit PWM, a system clock frequency divider, an infrared remote control receiver circuit, and a 40-source 10-vector interrupt feature.

### Features

#### ■Flash ROM

- Capable of on-board programming with a wide range of supply voltages: 3.0 to 5.5V
- Block-erasable in 128 byte units
- Writes data in 2-byte units
- 131072 × 8 bits

#### ■RAM

- 16384 × 9 bits

#### ■Bus Cycle Time

- 83.3ns (When CF=12MHz)

Note: The bus cycle time here refers to the ROM read speed.

\* This product is licensed from Silicon Storage Technology, Inc. (USA), and manufactured and sold by SANYO Semiconductor Co., Ltd.

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

**SANYO Semiconductor Co., Ltd.**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

# LC87F1HC8A

## ■ Minimum Instruction Cycle Time (tCYC)

- 250ns (When CF=12MHz)

## ■ Ports

- I/O ports

Ports whose I/O direction can be designated in 1-bit units 28 (P10 to P17, P20 to P27, P30 to P34, P70 to P73, PWM0, PWM1, XT2)

Ports whose I/O direction can be designated in 4-bit units 8 (P00 to P07)

- USB ports 2 (UHD+, UHD-)
- Dedicated oscillator ports 2 (CF1, CF2)
- Input-only port (also used for oscillation) 1 (XT1)
- Reset pins 1 (RES)
- Power supply pins 6 (VSS1 to 3, VDD1 to 3)

## ■ Timers

- Timer 0: 16-bit timer/counter with 2 capture registers.

Mode 0: 8-bit timer with an 8-bit programmable prescaler (with two 8-bit capture registers) × 2 channels

Mode 1: 8-bit timer with an 8-bit programmable prescaler (with two 8-bit capture registers) + 8-bit counter (with two 8-bit capture registers)

Mode 2: 16-bit timer with an 8-bit programmable prescaler (with two 16-bit capture registers)

Mode 3: 16-bit counter (with two 16-bit capture registers)

- Timer 1: 16-bit timer/counter that supports PWM/toggle outputs

Mode 0: 8-bit timer with an 8-bit prescaler (with toggle outputs) + 8-bit timer/counter with an 8-bit prescaler (with toggle outputs)

Mode 1: 8-bit PWM with an 8-bit prescaler × 2 channels

Mode 2: 16-bit timer/counter with an 8-bit prescaler (with toggle outputs) (toggle outputs also possible from lower-order 8 bits)

Mode 3: 16-bit timer with an 8-bit prescaler (with toggle outputs) (lower-order 8 bits may be used as a PWM output)

- Timer 4: 8-bit timer with a 6-bit prescaler
- Timer 5: 8-bit timer with a 6-bit prescaler
- Timer 6: 8-bit timer with a 6-bit prescaler (with toggle outputs)
- Timer 7: 8-bit timer with a 6-bit prescaler (with toggle outputs)
- Base timer

1) The clock is selectable from the subclock (32.768kHz crystal oscillation), system clock, and timer 0 prescaler output.

2) Interrupts programmable in 5 different time schemes

## ■ SIO

- SIO0: Synchronous serial interface

1) LSB first/MSB first mode selectable

2) Transfer clock cycle: 4/3 to 512/3 tCYC

3) Automatic continuous data transmission (1 to 256 bits, specifiable in 1-bit units) (Suspension and resumption of data transmission possible in 1 byte units)

- SIO1: 8-bit asynchronous/synchronous serial interface

Mode 0: Synchronous 8-bit serial I/O (2- or 3-wire configuration, 2 to 512 tCYC transfer clocks)

Mode 1: Asynchronous serial I/O (half-duplex, 8 data bits, 1 stop bit, 8 to 2048 tCYC baudrates)

Mode 2: Bus mode 1 (start bit, 8 data bits, 2 to 512 tCYC transfer clocks)

Mode 3: Bus mode 2 (start detect, 8 data bits, stop detect)

- SIO4: Synchronous serial interface

1) LSB first/MSB first mode selectable

2) Transfer clock cycle: 4/3 to 1020/3 tCYC

3) Automatic continuous data transmission (1 to 4096 bytes, specifiable in 1 byte units) (Suspension and resumption of data transmission possible in 1 byte units or in word units)

4) Auto-start-on-falling-edge function

5) Clock polarity selectable

6) CRC16 calculator circuit built in

Continued on next page.

Continued from preceding page.

- SIO9: Synchronous serial interface
  - 1) LSB first/MSB first mode selectable
  - 2) Transfer clock cycle: 4/3 to 1020/3 tCYC
  - 3) Automatic continuous data transmission (1 to 4096 bytes, specifiable in 1 byte units)  
(Suspension and resumption of data transmission possible in 1 byte units or word units)
  - 4) Auto-start-on-falling-edge function
  - 5) Clock polarity selectable
  - 6) CRC16 calculator circuit built in

■ Full Duplex UART

- 1) Data length: 7/8/9 bits selectable
- 2) Stop bits: 1 bit (2 bits in continuous transmission mode)
- 3) Baud rate: 16/3 to 8192/3 tCYC

■ AD Converter: 8 bits × 12 channels

■ PWM: Multifrequency 12-bit PWM × 2 channels

■ Infrared Remote Control Receiver Circuit

- 1) Noise rejection function (noise filter time constant: Approx. 120μs when the 32.768kHz crystal oscillator is selected as the base clock)
- 2) Supports data encoding systems such as PPM (Pulse Position Modulation) and Manchester encoding.
- 3) X'tal HOLD mode reset function

■ USB Interface (host control function)

- 1) Compliant with full-speed (12M bps) specifications
- 2) Supports 4 transfer types (control transfer, bulk transfer, interrupt transfer, and isochronous transfer).

■ Audio Interface

- 1) Sampling frequency (fs): 32kHz, 44.1kHz, 48kHz
- 2) Master clock frequency (internal PLL): 12.288MHz, 16.9344MHz, 18.432MHz
- 3) Bit clock selectable: 48fs/64fs
- 4) Data bit length: 16/18/20/24 bits
- 5) LSB first/MSB firsts selectable
- 6) Left-justification/right-justification selectable

■ Watchdog Timer

- Watchdog timer using external RC circuitry
- Interrupt and reset signals selectable

■ Clock Output Function

- 1) Can output a clock with a clock rate of 1/1, 1/2, 1/4, 1/8, 1/16, 1/32, or 1/64 of the source oscillator clock selected as the system clock.
- 2) Can output the source oscillation clock for the subclock.

# LC87F1HC8A

## ■ Interrupts

- 40 sources, 10 vector addresses
  - 1) Provides three levels (low (L), high (H), and highest (X)) of multiplex interrupt control. Any interrupt requests of the level equal to or lower than the current interrupt are not accepted.
  - 2) When interrupt requests to two or more vector addresses occur at the same time, the interrupt of the highest level takes precedence over the other interrupts. For interrupts of the same level, the interrupt into the smallest vector address takes precedence.

| No. | Vector Address | Level  | Interrupt Source   |
|-----|----------------|--------|--|
| 1   | 00003H         | X or L | INT0   |
| 2   | 0000BH         | X or L | INT1   |
| 3   | 00013H         | H or L | INT2/T0L/INT4/UHC bus active/remote control signal receive |
| 4   | 0001BH         | H or L | INT3/INT5/base timer                                       |
| 5   | 00023H         | H or L | T0H/INT6/UHC device connected/UHC disconnected/UHC resume  |
| 6   | 0002BH         | H or L | T1L/T1H/INT7/SIO9/AIF start                                |
| 7   | 00033H         | H or L | SIO0/UART1 receive   |
| 8   | 0003BH         | H or L | SIO1/SIO4/UART1 transmit/end of AIF                        |
| 9   | 00043H         | H or L | ADC/T6/T7/UHC-ACK/UHC-NAK/UHC error/UHC STALL              |
| 10  | 0004BH         | H or L | Port 0/PWM0/PWM1/T4/T5/UHC-SOF/DMCOPY                      |

- Priority levels  $X > H > L$
- Of interrupts of the same level, the one with the smallest vector address takes precedence.

## ■ Subroutine Stack Levels: 8192 levels maximum (The stack is allocated in RAM.)

## ■ High-speed Multiplication/Division Instructions

- 16 bits  $\times$  8 bits (5 tCYC execution time)
- 24 bits  $\times$  16 bits (12 tCYC execution time)
- 16 bits  $\div$  8 bits (8 tCYC execution time)
- 24 bits  $\div$  16 bits (12 tCYC execution time)

## ■ Oscillation and PLL Circuits

- RC oscillation circuit (internal): For system clock
- CF oscillation circuit: For system clock
- Crystal oscillation circuit: For system clock, time-of-day clock
- PLL circuit (internal): For USB interface (see Fig.5) , audio interface (see Fig. 6)

## ■ Standby Function

- HALT mode: Halts instruction execution while allowing the peripheral circuits to continue operation.
  - 1) Oscillation is not halted automatically.
  - 2) Canceled by a system reset or occurrence of an interrupt.
- HOLD mode: Suspends instruction execution and the operation of the peripheral circuits.
  - 1) The PLL base clock generator, CF, RC and crystal oscillators automatically stop operation.
  - 2) There are four ways of resetting the HOLD mode.
    - (1) Setting the reset pin to the lower level.
    - (2) Setting at least one of the INT0, INT1, INT2, INT4, and INT5 pins to the specified level
    - (3) Having an interrupt source established at port 0
    - (4) Having an bus active interrupt source established in the USB host controll circuit
- X'tal HOLD mode: Suspends instruction execution and the operation of the peripheral circuits except the base timer.
  - 1) The PLL base clock generator, CF and RC oscillator automatically stop operation.
  - 2) The state of crystal oscillation established when the X'tal HOLD mode is entered is retained.
  - 3) There are six ways of resetting the X'tal HOLD mode.
    - (1) Setting the reset pin to the low level
    - (2) Setting at least one of the INT0, INT1, INT2, INT4, and INT5 pins to the specified level
    - (3) Having an interrupt source established at port 0
    - (4) Having an interrupt source established in the base timer circuit
    - (5) Having an bus active interrupt source established in the USB host controll circuit
    - (6) Having an interrupt source established in the infrared remote controller receiver circuit

# LC87F1HC8A

## ■ Package Form

- SQFP48(7×7): Lead-free type

## ■ Development Tools

- On-chip debugger: TCB87- type-B + LC87F1HC8A

## ■ Flash ROM Programming Boards

| Package       | Programming boards |
|---------------|--------------------|
| SQFP48(7 × 7) | W87F55256SQ        |


## ■ Recommended EPROM Programmer

| Maker                                 | Model  | Supported version  | Device     |
|---------------------------------------|--|--|------------|
| Flash Support Group, Inc.<br>(Single) | AF9708/AF9709/AF9709B<br>(including products from Ando Electric Co., Ltd.) | After Rev02.73   | LC87F76C8A |
| SANYO                                 | SKK/SKK TypeB/SKK-DBG TypeB<br>(SANYO FWS)                                 | Application Version: After 2.04<br>Chip Data Version: After 2.11 | LC87F1HC8  |

## Package Dimensions


unit : mm (typ)

3163B

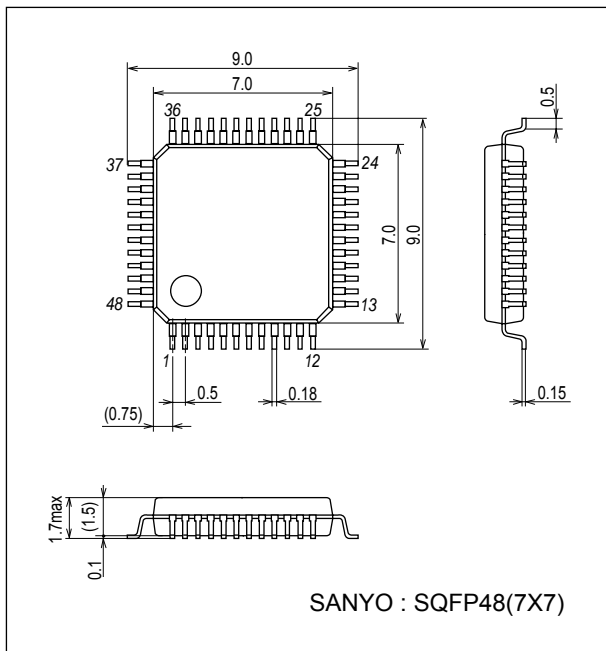

# LC87F1HC8A

## Pin Assignment

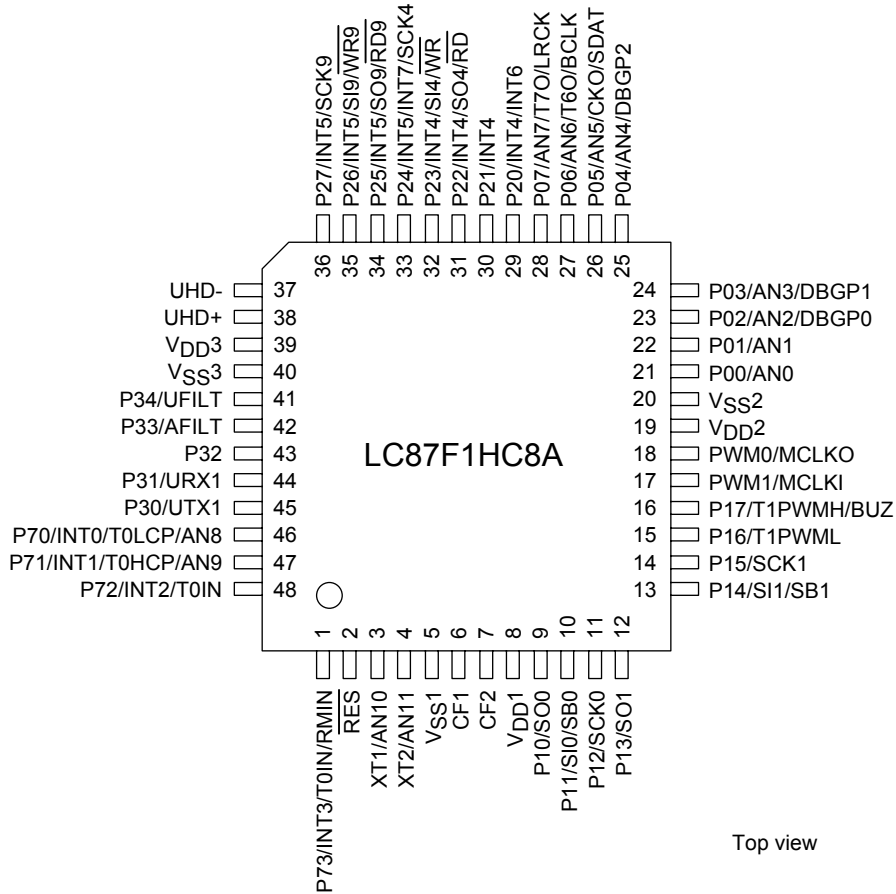


SANYO : SQFP48(7×7) “Lead-free Type”

| SQFP48 | NAME               |
|--------|--------------------|
| 1      | P73/INT3/T0IN/RMIN |
| 2      | RES                |
| 3      | XT1/AN10           |
| 4      | XT2/AN11           |
| 5      | VSS1               |
| 6      | CF1                |
| 7      | CF2                |
| 8      | VDD1               |
| 9      | P10/SO0            |
| 10     | P11/SI0/SB0        |
| 11     | P12/SCK0           |
| 12     | P13/SO1            |
| 13     | P14/SI1/SB1        |
| 14     | P15/SCK1           |
| 15     | P16/T1PWML         |
| 16     | P17/T1PWMH/BUZ     |
| 17     | PWM1/MCLKI         |
| 18     | PWM0/MCLKO         |
| 19     | VDD2               |
| 20     | VSS2               |
| 21     | P00/AN0            |
| 22     | P01/AN1            |
| 23     | P02/AN2/DBGP0      |
| 24     | P03/AN3/DBGP1      |

| SQFP48 | NAME               |
|--------|--------------------|
| 25     | P04/AN4/DBGP2      |
| 26     | P05/AN5/CKO/SDAT   |
| 27     | P06/AN6/T6O/BCLK   |
| 28     | P07/AN7/T7O/LRCK   |
| 29     | P20/INT4/INT6      |
| 30     | P21/INT4           |
| 31     | P22/INT4/SO4/RD    |
| 32     | P23/INT4/SI4/WR    |
| 33     | P24/INT5/INT7/SCK4 |
| 34     | P25/INT5/SO9/RD9   |
| 35     | P26/INT5/SI9/WR9   |
| 36     | P27/INT5/SCK9      |
| 37     | UHD-               |
| 38     | UHD+               |
| 39     | VDD3               |
| 40     | VSS3               |
| 41     | P34/UFILT          |
| 42     | P33/AFILT          |
| 43     | P32                |
| 44     | P31/URX1           |
| 45     | P30/UTX1           |
| 46     | P70/INT0/T0LCP/AN8 |
| 47     | P71/INT1/T0HCP/AN9 |
| 48     | P72/INT2/T0IN      |

# LC87F1HC8A

## System Block Diagram

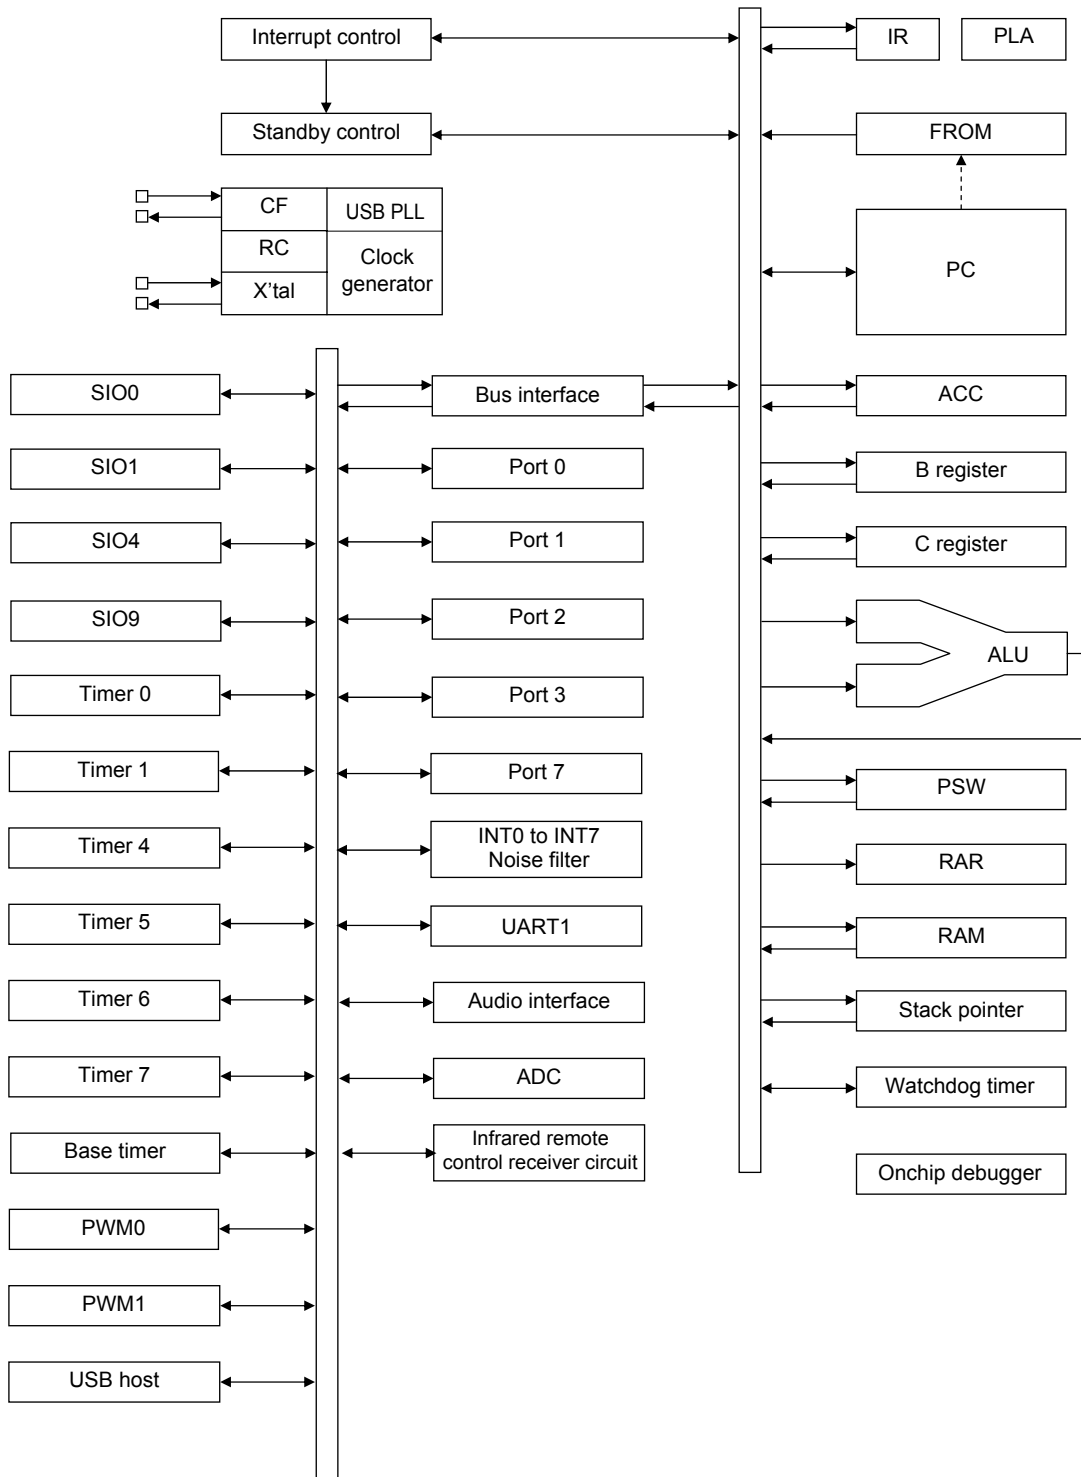

# LC87F1HC8A

## Pin Description

| Pin Name   | I/O    | Description   | Option           |         |         |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
|--|--------|---|------------------|---------|---------|------------------|---------|---------|------|--------|--------|--------|---------|---------|------|--------|--------|--------|---------|---------|------|--------|--------|--------|---------|---------|------|--------|--------|--------|---------|---------|-----|
| V <sub>SS</sub> 1, V <sub>SS</sub> 2,<br>V <sub>SS</sub> 3 | -      | - power supply  | No               |         |         |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| V <sub>DD</sub> 1, V <sub>DD</sub> 2                       | -      | + power supply  | No               |         |         |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| V <sub>DD</sub> 3  | -      | USB reference voltage   | Yes              |         |         |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| Port 0<br>P00 to P07                                       | I/O    | <ul style="list-style-type: none"> <li>• 8-bit I/O ports</li> <li>• I/O specifiable in 4-bit units</li> <li>• Pull-up resistors can be turned on and off in 4-bit units.</li> <li>• HOLD reset input</li> <li>• Port 0 interrupt input</li> <li>• Pin functions                             <ul style="list-style-type: none"> <li>AD converter input ports: AN0 to AN7 (P00 to P07)</li> <li>Onchip debugger pins: DBG P0 to DBG P2 (P02 to P04)</li> <li>P05: System clock output/audio interface SDAT input/output</li> <li>P06: Timer 6 toggle output/audio interface BCLK input/output</li> <li>P07: Timer 7 toggle output/audio interface LRCK input/output</li> </ul> </li> </ul>  | Yes              |         |         |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| Port 1<br>P10 to P17                                       | I/O    | <ul style="list-style-type: none"> <li>• 8-bit I/O ports</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units.</li> <li>• Pin functions                             <ul style="list-style-type: none"> <li>P10: SIO0 data output</li> <li>P11: SIO0 data input/bus input/output</li> <li>P12: SIO0 clock input/output</li> <li>P13: SIO1 data output</li> <li>P14: SIO1 data input/bus input/output</li> <li>P15: SIO1 clock input/output</li> <li>P16: Timer 1 PWML output</li> <li>P17: Timer 1 PWMH output/beeper output</li> </ul> </li> </ul>  | Yes              |         |         |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| Port 2<br>P20 to P27                                       | I/O    | <ul style="list-style-type: none"> <li>• 8-bit I/O ports</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units.</li> <li>• Pin functions                             <ul style="list-style-type: none"> <li>P20 to P23: INT4 input/HOLD reset input/timer 1 event input/timer 0L capture input/timer 0H capture input</li> <li>P24 to P27: INT5 input/HOLD reset input/timer 1 event input/timer 0L capture input/timer 0H capture input</li> <li>P20: INT6 input/timer 0L capture 1 input</li> <li>P22: SIO4 data input/output/parallel interface <math>\overline{RD}</math> output</li> <li>P23: SIO4 data input/output/parallel interface <math>\overline{WR}</math> output</li> <li>P24: SIO4 clock input/output/INT7 input/timer 0H capture 1 input</li> <li>P25: SIO9 data input/output/parallel interface <math>\overline{RD9}</math> output</li> <li>P26: SIO9 data input/output/parallel interface <math>\overline{WR9}</math> output</li> <li>P27: SIO9 clock input/output</li> </ul> </li> <li>Interrupt acknowledge types                             <table border="1" style="margin-left: 20px; width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th>Rising</th> <th>Falling</th> <th>Rising &amp; Falling</th> <th>H level</th> <th>L level</th> </tr> </thead> <tbody> <tr> <td>INT4</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> <tr> <td>INT5</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> <tr> <td>INT6</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> <tr> <td>INT7</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> </tbody> </table> </li> </ul> |                  | Rising  | Falling | Rising & Falling | H level | L level | INT4 | enable | enable | enable | disable | disable | INT5 | enable | enable | enable | disable | disable | INT6 | enable | enable | enable | disable | disable | INT7 | enable | enable | enable | disable | disable | Yes |
|  | Rising | Falling   | Rising & Falling | H level | L level |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT4   | enable | enable  | enable           | disable | disable |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT5   | enable | enable  | enable           | disable | disable |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT6   | enable | enable  | enable           | disable | disable |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT7   | enable | enable  | enable           | disable | disable |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| Port 3<br>P30 to P34                                       | I/O    | <ul style="list-style-type: none"> <li>• 5-bit I/O ports</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units.</li> <li>• Pin functions                             <ul style="list-style-type: none"> <li>P30: UART1 transmit</li> <li>P31: UART1 receive</li> <li>P33: Audio interface PLL filter pin (see Fig. 6.)</li> <li>P34: USB interface PLL filter pin (see Fig. 5.)</li> </ul> </li> </ul>   | Yes              |         |         |                  |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |

Continued on next page.



# LC87F1HC8A

Continued from preceding page.

| Pin Name             | I/O    | Description  | Option           |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
|----------------------|--------|--|------------------|---------|---------|------------------|---------|---------|------|--------|--------|---------|--------|--------|------|--------|--------|---------|--------|--------|------|--------|--------|--------|---------|---------|------|--------|--------|--------|---------|---------|----|
| Port 7<br>P70 to P73 | I/O    | <ul style="list-style-type: none"> <li>• 4-bit I/O port</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units.</li> <li>• Pin functions</li> </ul> P70: INT0 input/HOLD reset input/timer 0L capture input/watchdog timer output<br>P71: INT1 input/HOLD reset input/timer 0H capture input<br>P72: INT2 input/HOLD reset input/timer 0 event input/timer 0L capture input/<br>high speed clock counter input<br>P73: INT3 input (input with noise filter)/timer 0 event input/timer 0H capture input/<br>IR remote controller receiver input<br>AD converter input ports: AN8(P70), AN9(P71)<br>Interrupt acknowledge types <table border="1" style="margin-left: 20px;"> <thead> <tr> <th></th> <th>Rising</th> <th>Falling</th> <th>Rising &amp; Falling</th> <th>H level</th> <th>L level</th> </tr> </thead> <tbody> <tr> <td>INT0</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>enable</td> <td>enable</td> </tr> <tr> <td>INT1</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>enable</td> <td>enable</td> </tr> <tr> <td>INT2</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> <tr> <td>INT3</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> </tbody> </table> |                  | Rising  | Falling | Rising & Falling | H level | L level | INT0 | enable | enable | disable | enable | enable | INT1 | enable | enable | disable | enable | enable | INT2 | enable | enable | enable | disable | disable | INT3 | enable | enable | enable | disable | disable | No |
|                      | Rising | Falling  | Rising & Falling | H level | L level |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| INT0                 | enable | enable   | disable          | enable  | enable  |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| INT1                 | enable | enable   | disable          | enable  | enable  |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| INT2                 | enable | enable   | enable           | disable | disable |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| INT3                 | enable | enable   | enable           | disable | disable |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| PWM0<br>PWM1         | I/O    | PWM0, PWM1 output port<br>General-purpose input port <ul style="list-style-type: none"> <li>• Pin functions</li> </ul> PWM0: Audio interface master clock output<br>PWM1: Audio interface master clock input   | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| UHD-                 | I/O    | USB data I/O pin UHD-/general-purpose I/O port   | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| UHD+                 | I/O    | USB data I/O pin UHD+/general-purpose I/O port   | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| RES                  | Input  | Reset pin  | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| XT1                  | Input  | <ul style="list-style-type: none"> <li>• 32.768kHz crystal oscillator input</li> <li>• Pin functions</li> </ul> General-purpose input port<br>AD converter input ports: AN10<br>Must be connected to $V_{DD1}$ when not to be used.  | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| XT2                  | I/O    | <ul style="list-style-type: none"> <li>• 32.768kHz crystal oscillator output</li> <li>• Pin functions</li> </ul> General-purpose I/O<br>AD converter input port: AN11<br>Must be set for oscillation and kept open if not to be used.  | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| CF1                  | Input  | Ceramic/crystal resonator input  | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |
| CF2                  | Output | Ceramic/crystal resonator output   | No               |         |         |                  |         |         |      |        |        |         |        |        |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |    |

# LC87F1HC8A

## Port Output Types

The table below lists the types of port outputs and the presence/absence of a pull-up resistor. Data can be read into any input port even if it is in the output mode.


| Port Name                              | Option selected in units of | Option type | Output type   | Pull-up resistor      |
|--|-----------------------------|-------------|---|-----------------------|
| P00 to P07                             | 1 bit                       | 1           | CMOS  | Programmable (Note 1) |
|  |                             | 2           | Nch-open drain  | No                    |
| P10 to P17<br>P20 to P27<br>P30 to P34 | 1 bit                       | 1           | CMOS  | Programmable          |
|  |                             | 2           | Nch-open drain  | Programmable          |
| P70                                    | -                           | No          | Nch-open drain  | Programmable          |
| P71 to P73                             | -                           | No          | CMOS  | Programmable          |
| PWM0, PWM1                             | -                           | No          | CMOS  | No                    |
| UHD+, UHD-                             | -                           | No          | CMOS  | No                    |
| XT1                                    | -                           | No          | Input only  | No                    |
| XT2                                    | -                           | No          | 32.768kHz crystal resonator output (N channel open drain when in general-purpose output mode) | No                    |

Note 1: Programmable pull-up resistors for port 0 are controlled in 4 bit units (P00 to 03, P04 to 07).


## Power Pin Treatment

Connect the IC as shown below to minimize the noise input to the V<sub>DD1</sub> pin. and extend the backup period. Be sure to electrically short the V<sub>SS1</sub>, V<sub>SS2</sub>, and V<sub>SS3</sub> pins.

Example 1: When the microcontroller is in the backup state in the HOLD mode, the power to sustain the high level of output ports is supplied by their backup capacitors.

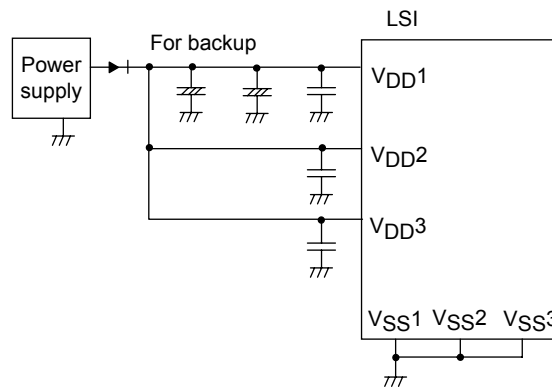

Example 2: The high level output at ports is not sustained and unstable in the HOLD backup mode.

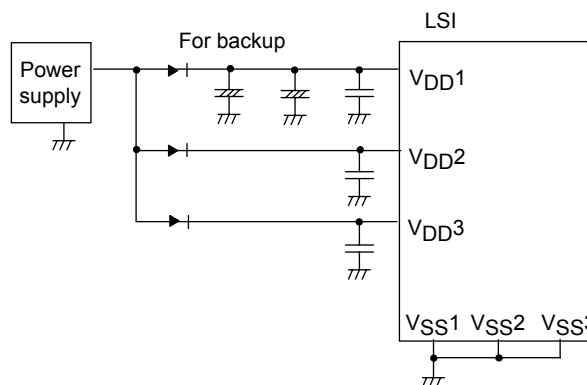

## USB Reference Power Option


When a voltage 4.5 to 5.5V is supplied to V<sub>DD1</sub> and the internal USB reference voltage circuit is activated, the reference voltage for USB port output is generated. The active/inactive state of the reference voltage circuit can be switched by option select. The procedure for marking the option selection is described below.

|                                 |                            | (1)    | (2)      | (3)      | (4)      |
|---------------------------------|----------------------------|--------|----------|----------|----------|
| Option settings                 | USB regulator              | USE    | USE      | USE      | NONUSE   |
|                                 | USB regulator at HOLD mode | USE    | NONUSE   | NONUSE   | NONUSE   |
|                                 | USB regulator at HALT mode | USE    | NONUSE   | USE      | NONUSE   |
| Reference voltage circuit state | Normal mode                | active | active   | active   | inactive |
|                                 | HOLD mode                  | active | inactive | inactive | inactive |
|                                 | HALT mode                  | active | inactive | active   | inactive |

- When the USB reference voltage circuit is made inactive, the level of the reference voltage for USB port output is equal to V<sub>DD1</sub>.
- Selection (2) or (3) can be used to set the reference voltage circuit inactive in HOLD or HALT mode.
- When the reference voltage circuit is activated, the current drain increases by approximately 100μA compared with when the reference voltage circuit is inactive.


Example 1: V<sub>DD1</sub>=V<sub>DD2</sub>=3.3V

- Inactivating the reference voltage circuit (selection (4)).
- Connecting V<sub>DD3</sub> to V<sub>DD1</sub> and V<sub>DD2</sub>.

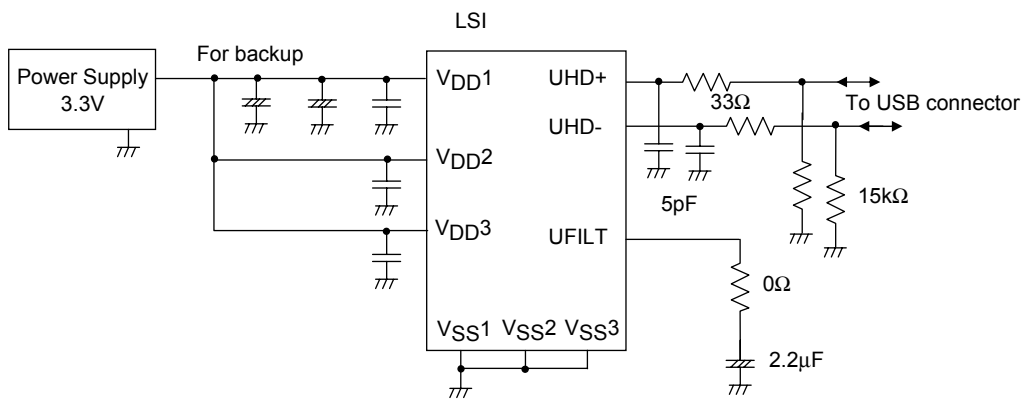

Example 2: V<sub>DD1</sub>=V<sub>DD2</sub>=5.0V

- Activating the reference voltage circuit (selection (1)).
- Isolating V<sub>DD3</sub> from V<sub>DD1</sub> and V<sub>DD2</sub>, and connecting capacitor between V<sub>DD3</sub> and V<sub>SS</sub>.

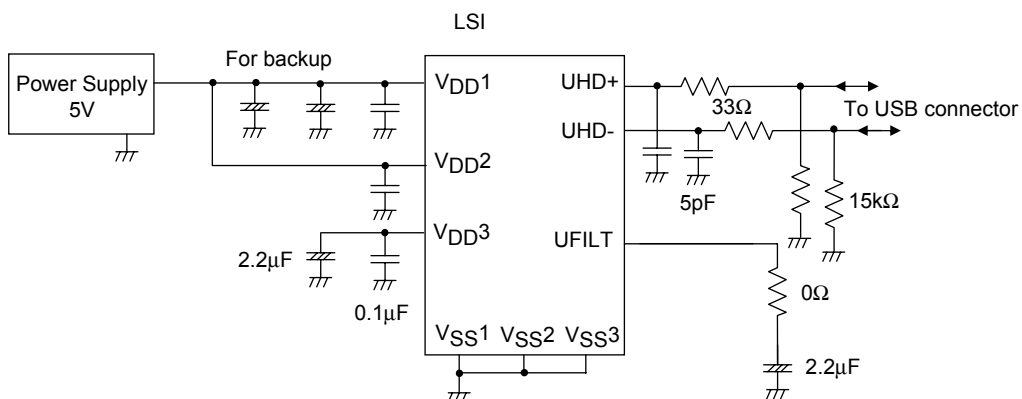

# LC87F1HC8A

## Absolute Maximum Ratings at Ta = 25°C, VSS1 = VSS2 = VSS3 = 0V

| Parameter                     | Symbol                            | Pin/Remarks                              | Conditions                             | Specification   |      |      |         | unit |
|-------------------------------|-----------------------------------|--|--|---|------|------|---------|------|
|                               |                                   |  |  | VDD[M]  | min  | typ  | max     |      |
| Maximum supply voltage        | VDD max                           | VDD1, VDD2, VDD3                         | VDD1=VDD2=VDD3                         |   | -0.3 |      | +6.5    | V    |
| Input voltage                 | VI(1)                             | XT1, CF1                                 |  |   | -0.3 |      | VDD+0.3 |      |
| Input/output voltage          | VI(1)                             | Ports 0, 1, 2, 3, 7<br>PWM0, PWM1<br>XT2 |  |   | -0.3 |      | VDD+0.3 |      |
| High level output current     | Peak output current               | IOPH(1)                                  | Ports 0, 1, 2                          | • When CMOS output type is selected<br>• Per 1 applicable pin |      | -10  |         | mA   |
|                               |                                   | IOPH(2)                                  | PWM0, PWM1                             | Per 1 applicable pin  |      | -20  |         |      |
|                               |                                   | IOPH(3)                                  | Port 3<br>P71 to P73                   | • When CMOS output type is selected<br>• Per 1 applicable pin |      | -5   |         |      |
|                               | Average output current (Note 1-1) | IOMH(1)                                  | Ports 0, 1, 2                          | • When CMOS output type is selected<br>• Per 1 applicable pin |      | -7.5 |         |      |
|                               |                                   | IOMH(2)                                  | PWM0, PWM1                             | Per 1 applicable pin  |      | -15  |         |      |
|                               |                                   | IOMH(3)                                  | Port 3<br>P71 to P73                   | • When CMOS output type is selected<br>• Per 1 applicable pin |      | -3   |         |      |
|                               | Total output current              | ΣIOAH(1)                                 | Ports 0, 2                             | Total current of all applicable pins                          |      | -25  |         |      |
|                               |                                   | ΣIOAH(2)                                 | Port 1<br>PWM0, PWM1                   | Total current of all applicable pins                          |      | -25  |         |      |
|                               |                                   | ΣIOAH(3)                                 | Ports 0, 1, 2<br>PWM0, PWM1            | Total current of all applicable pins                          |      | -45  |         |      |
|                               |                                   | ΣIOAH(4)                                 | Port 3<br>P71 to P73                   | Total current of all applicable pins                          |      | -10  |         |      |
| ΣIOAH(5)                      |                                   | UHD+, UHD-                               | Total current of all applicable pins   |   | -25  |      |         |      |
| Low level output current      | Peak output current               | IOPL(1)                                  | P02 to P07<br>Ports 1, 2<br>PWM0, PWM1 | Per 1 applicable pin  |      |      | 20      |      |
|                               |                                   | IOPL(2)                                  | P00, P01                               | Per 1 applicable pin  |      |      | 30      |      |
|                               |                                   | IOPL(3)                                  | Ports 3, 7<br>XT2                      | Per 1 applicable pin  |      |      | 10      |      |
|                               | Average output current (Note 1-1) | IOML(1)                                  | P02 to P07<br>Ports 1, 2<br>PWM0, PWM1 | Per 1 applicable pin  |      |      | 15      |      |
|                               |                                   | IOML(2)                                  | P00, P01                               | Per 1 applicable pin  |      |      | 20      |      |
|                               |                                   | IOML(3)                                  | Ports 3, 7<br>XT2                      | Per 1 applicable pin  |      |      | 7.5     |      |
|                               | Total output current              | ΣIOAL(1)                                 | Ports 0, 2                             | Total current of all applicable pins                          |      |      | 45      |      |
|                               |                                   | ΣIOAL(2)                                 | Port 1<br>PWM0, PWM1                   | Total current of all applicable pins                          |      |      | 45      |      |
|                               |                                   | ΣIOAL(3)                                 | Ports 0, 1, 2<br>PWM0, PWM1            | Total current of all applicable pins                          |      |      | 80      |      |
|                               |                                   | ΣIOAL(4)                                 | Ports 3, 7<br>XT2                      | Total current of all applicable pins                          |      |      | 15      |      |
| ΣIOAL(5)                      |                                   | UHD+, UHD-                               | Total current of all applicable pins   |   |      | 25   |         |      |
| Allowable power Dissipation   | Pd max                            | SQFP48(7×7)                              | Ta=-40 to +85°C                        |   |      |      | 140     | mW   |
| Operating ambient Temperature | Topr                              |  |  |   | -40  |      | +85     | °C   |
| Storage ambient temperature   | Tstg                              |  |  |   | -55  |      | +125    |      |

Note 1-1: The average output current is an average of current values measured over 100ms intervals.

# LC87F1HC8A

## Allowable Operating Conditions at Ta = -40°C to +85°C, V<sub>SS1</sub> = V<sub>SS2</sub> = V<sub>SS3</sub> = 0V

| Parameter                              | Symbol              | Pin/Remarks  | Conditions   | Specification                             |                            |     |                             | unit |
|--|---------------------|--|--|---|----------------------------|-----|-----------------------------|------|
|  |                     |  |  | V <sub>DD</sub> [V]                       | min                        | typ | max                         |      |
| Operating supply voltage (Note 2-1)    | V <sub>DD</sub> (1) | V <sub>DD1</sub> =V <sub>DD2</sub> =V <sub>DD3</sub>                             | 0.245μs ≤ tCYC ≤ 200μs   |   | 3.0                        |     | 5.5                         | V    |
|  |                     |  | 0.490μs ≤ tCYC ≤ 200μs Except in onboard programming mode  |   | 2.7                        |     | 5.5                         |      |
| Memory sustaining supply voltage       | V <sub>HD</sub>     | V <sub>DD1</sub> =V <sub>DD2</sub> =V <sub>DD3</sub>                             | RAM and register contents sustained in HOLD mode.  |   | 2.0                        |     | 5.5                         |      |
| High level input voltage               | V <sub>IH</sub> (1) | Port 0, 1, 2, 3<br>P71 to P73<br>P70 port input/<br>interrupt side<br>PWM0, PWM1 |  | 2.7 to 5.5                                | 0.3V <sub>DD</sub><br>+0.7 |     | V <sub>DD</sub>             |      |
|  | V <sub>IH</sub> (2) | Port 70 watchdog timer side  |  | 2.7 to 5.5                                | 0.9V <sub>DD</sub>         |     | V <sub>DD</sub>             |      |
|  | V <sub>IH</sub> (3) | XT1, XT2, CF1, RES   |  | 2.7 to 5.5                                | 0.75V <sub>DD</sub>        |     | V <sub>DD</sub>             |      |
| Low level input voltage                | V <sub>IL</sub> (1) | Port 1, 2, 3<br>P71 to P73   |  | 4.0 to 5.5                                | V <sub>SS</sub>            |     | 0.1V <sub>DD</sub><br>+0.4  |      |
|  | V <sub>IL</sub> (2) | P70 port input/<br>interrupt side  |  | 2.7 to 4.0                                | V <sub>SS</sub>            |     | 0.2V <sub>DD</sub>          |      |
|  | V <sub>IL</sub> (3) | Port 0<br>PWM0, PWM1   |  | 4.0 to 5.5                                | V <sub>SS</sub>            |     | 0.15V <sub>DD</sub><br>+0.4 |      |
|  | V <sub>IL</sub> (4) |  |  | 2.7 to 4.0                                | V <sub>SS</sub>            |     | 0.2V <sub>DD</sub>          |      |
|  | V <sub>IL</sub> (5) | Port 70 watchdog timer side  |  | 2.7 to 5.5                                | V <sub>SS</sub>            |     | 0.8V <sub>DD</sub><br>-1.0  |      |
|  | V <sub>IL</sub> (6) | XT1, XT2, CF1, RES   |  | 2.7 to 5.5                                | V <sub>SS</sub>            |     | 0.25V <sub>DD</sub>         |      |
| Instruction cycle time (Note 2-2)      | tCYC                |  |  | 3.0 to 5.5                                | 0.245                      |     | 200                         | μs   |
|  |                     |  | Except for onboard programming mode  | 2.7 to 5.5                                | 0.490                      |     | 200                         |      |
| External system clock frequency        | FEXCF(1)            | CF1  | <ul style="list-style-type: none"> <li>• CF2 pin open</li> <li>• System clock frequency division ratio=1/1</li> <li>• External system clock duty =50±5%</li> </ul> | 3.0 to 5.5                                | 0.1                        |     | 12                          | MHz  |
|  |                     |  | <ul style="list-style-type: none"> <li>• CF2 pin open</li> <li>• System clock frequency division ratio=1/1</li> <li>• External system clock duty =50±5%</li> </ul> | 2.7 to 5.5                                | 0.1                        |     | 6                           |      |
| Oscillation frequency range (Note 2-3) | FmCF(1)             | CF1, CF2   | When 12MHz ceramic oscillation See Fig. 1.   | 3.0 to 5.5                                |                            | 12  |                             | MHz  |
|  | FmCF(2)             | CF1, CF2   | When 6MHz ceramic oscillation See Fig. 1.  | 2.7 to 5.5                                |                            | 6   |                             |      |
|  | FmRC                |  | Internal RC oscillation  | 2.7 to 5.5                                | 0.3                        | 1.0 | 2.0                         |      |
|  | FsX'tal             | XT1, XT2   |  | 32.768kHz crystal oscillation See Fig. 2. | 2.7 to 5.5                 |     | 32.768                      | kHz  |

Note 2-1: V<sub>DD</sub> must be held greater than or equal to 3.0V in the flash ROM onboard programming mode.

Note 2-2: Relationship between tCYC and oscillation frequency is 3/FmCF at a division ratio of 1/1 and 6/FmCF at a division ratio of 1/2.

Note 2-3: See Tables 1 and 2 for the oscillation constants.

# LC87F1HC8A

## Electrical Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = VSS3 = 0V

| Parameter                 | Symbol              | Pin/Remarks   | Conditions   | Specification |                      |                    |     |      |
|---------------------------|---------------------|---|--|---------------|----------------------|--------------------|-----|------|
|                           |                     |   |  | VDD[V]        | min                  | typ                | max | unit |
| High level input current  | I <sub>IH</sub> (1) | Ports 0, 1, 2, 3<br>Port 7<br>$\overline{\text{RES}}$<br>PWM0, PWM1<br>UHD+, UHD- | Output disabled<br>Pull-up resistor off<br>V <sub>IN</sub> =V <sub>DD</sub><br>(Including output Tr's off leakage current) | 2.7 to 5.5    |                      |                    | 1   | μA   |
|                           | I <sub>IH</sub> (2) | XT1, XT2  | Input port configuration<br>V <sub>IN</sub> =V <sub>DD</sub>   | 2.7 to 5.5    |                      |                    | 1   |      |
|                           | I <sub>IH</sub> (3) | CF1   | V <sub>IN</sub> =V <sub>DD</sub>   | 2.7 to 5.5    |                      |                    | 15  |      |
| Low level input current   | I <sub>IL</sub> (1) | Ports 0, 1, 2, 3<br>Port 7<br>$\overline{\text{RES}}$<br>PWM0, PWM1<br>UHD+, UHD- | Output disabled<br>Pull-up resistor off<br>V <sub>IN</sub> =V <sub>SS</sub><br>(Including output Tr's off leakage current) | 2.7 to 5.5    | -1                   |                    |     | μA   |
|                           | I <sub>IL</sub> (2) | XT1, XT2  | Input port configuration<br>V <sub>IN</sub> =V <sub>SS</sub>   | 2.7 to 5.5    | -1                   |                    |     |      |
|                           | I <sub>IL</sub> (3) | CF1   | V <sub>IN</sub> =V <sub>SS</sub>   | 2.7 to 5.5    | -15                  |                    |     |      |
| High level output voltage | V <sub>OH</sub> (1) | Ports 0, 1, 2, 3<br>P71 to P73  | I <sub>OH</sub> =-1mA  | 4.5 to 5.5    | V <sub>DD</sub> -1   |                    |     | V    |
|                           | V <sub>OH</sub> (2) |   | I <sub>OH</sub> =-0.4mA  | 3.0 to 5.5    | V <sub>DD</sub> -0.4 |                    |     |      |
|                           | V <sub>OH</sub> (3) |   | I <sub>OH</sub> =-0.2mA  | 2.7 to 5.5    | V <sub>DD</sub> -0.4 |                    |     |      |
|                           | V <sub>OH</sub> (4) | PWM0, WM1<br>P05 to P07<br>(Note 3-1)   | I <sub>OH</sub> =-10mA   | 4.5 to 5.5    | V <sub>DD</sub> -1.5 |                    |     |      |
|                           | V <sub>OH</sub> (5) |   | I <sub>OH</sub> =-1.6mA  | 3.0 to 5.5    | V <sub>DD</sub> -0.4 |                    |     |      |
|                           | V <sub>OH</sub> (6) |   | I <sub>OH</sub> =-1mA  | 2.7 to 5.5    | V <sub>DD</sub> -0.4 |                    |     |      |
| Low level output voltage  | V <sub>OL</sub> (1) | P00, P01  | I <sub>OL</sub> =30mA  | 4.5 to 5.5    |                      |                    | 1.5 | V    |
|                           | V <sub>OL</sub> (2) |   | I <sub>OL</sub> =5mA   | 3.0 to 5.5    |                      |                    | 0.4 |      |
|                           | V <sub>OL</sub> (3) |   | I <sub>OL</sub> =2.5mA   | 2.7 to 5.5    |                      |                    | 0.4 |      |
|                           | V <sub>OL</sub> (4) | Ports 0, 1, 2<br>PWM0, PWM1<br>XT2  | I <sub>OL</sub> =10mA  | 4.5 to 5.5    |                      |                    | 1.5 |      |
|                           | V <sub>OL</sub> (5) |   | I <sub>OL</sub> =1.6mA   | 3.0 to 5.5    |                      |                    | 0.4 |      |
|                           | V <sub>OL</sub> (6) |   | I <sub>OL</sub> =1mA   | 2.7 to 5.5    |                      |                    | 0.4 |      |
|                           | V <sub>OL</sub> (7) | Ports 3, 7  | I <sub>OL</sub> =1.6mA   | 3.0 to 5.5    |                      |                    | 0.4 |      |
|                           | V <sub>OL</sub> (8) |   | I <sub>OL</sub> =1mA   | 2.7 to 5.5    |                      |                    | 0.4 |      |
| Pull-up resistance        | R <sub>pu</sub> (1) | Ports 0, 1, 2, 3  | V <sub>OH</sub> =0.9V <sub>DD</sub>  | 4.5 to 5.5    | 15                   | 35                 | 80  | kΩ   |
|                           | R <sub>pu</sub> (2) | Port 7  |  | 2.7 to 5.5    | 18                   | 50                 | 150 |      |
| Hysteresis voltage        | V <sub>HYS</sub>    | $\overline{\text{RES}}$<br>Port 1, 2, 3, 7  |  | 2.7 to 5.5    |                      | 0.1V <sub>DD</sub> |     | V    |
| Pin capacitance           | CP                  | All pins  | For pins other than that under test:<br>V <sub>IN</sub> =V <sub>SS</sub><br>f=1MHz<br>Ta=25°C                              | 2.7 to 5.5    |                      | 10                 |     | pF   |

Note 3-1: When the CKO system clock output function (P05) or audio interface output function (P05 to P07) is used.

# LC87F1HC8A

**Serial I/O Characteristics** at Ta = -40°C to +85°C, VSS1 = VSS2 = VSS3 = 0V

## 1. SIO0 Serial I/O Characteristics (Note 4-1-1)

| Parameter    |              | Symbol                 | Pin/<br>Remarks  | Conditions  | VDD[V]                | Specification |                       |      |      |
|--------------|--------------|------------------------|------------------|---|-----------------------|---------------|-----------------------|------|------|
|              |              |                        |                  |   |                       | min           | typ                   | max  | unit |
| Serial clock | Input clock  | Frequency              | tSCK(1)          | SCK0(P12)   | 2.7 to 5.5            | 2             |                       |      | tCYC |
|              |              | Low level pulse width  | tSCKL(1)         | <ul style="list-style-type: none"> <li>• Continuous data transfer mode</li> <li>• USB, AIF, SIO4, SIO9, and DMCOPY not used at the same time.</li> <li>• See Fig. 8.</li> <li>• (Note 4-1-2)</li> </ul> |                       | 1             |                       |      |      |
|              |              | High level pulse width | tSCKH(1)         |   |                       | 1             |                       |      |      |
|              |              |                        | tSCKHA(1a)       |   |                       | 4             |                       |      |      |
|              |              | tSCKHA(1b)             | 7                |   |                       |               |                       |      |      |
|              |              | tSCKHA(1c)             | 9                |   |                       |               |                       |      |      |
|              | Output clock | Frequency              | tSCK(2)          |   | SCK0(P12)             | 2.7 to 5.5    | 4/3                   |      |      |
|              |              | Low level pulse width  | tSCKL(2)         | <ul style="list-style-type: none"> <li>• When CMOS output type is selected</li> <li>• See Fig. 8.</li> </ul>  | 1/2                   |               |                       |      |      |
|              |              | High level pulse width | tSCKH(2)         |   | 1/2                   |               |                       |      |      |
|              |              |                        | tSCKHA(2a)       |   | tSCKH(2) + 2tCYC      |               | tSCKH(2) + (10/3)tCYC | tCYC |      |
|              |              | tSCKHA(2b)             | tSCKH(2) + 2tCYC |   | tSCKH(2) + (19/3)tCYC |               |                       |      |      |
|              |              | tSCKHA(2c)             | tSCKH(2) + 2tCYC |   | tSCKH(2) + (25/3)tCYC |               |                       |      |      |

Note 4-1-1: These specifications are theoretical values. Margins must be allowed according to the actual operating conditions.

Note 4-1-2: In an application where the serial clock input is to be used in the continuous data transfer mode, the time from SIORUN being set when serial clock is high to the falling edge of the first serial clock must be longer than tSCKHA.

Continued on next page.

# LC87F1HC8A

Continued from preceding page.

| Parameter     |                   | Symbol  | Pin/<br>Remarks       | Conditions  | V <sub>DD</sub> [V] | Specification  |     |                                |      |
|---------------|-------------------|---------|-----------------------|---|---------------------|--|-----|--------------------------------|------|
|               |                   |         |                       |   |                     | min  | typ | max                            | unit |
| Serial input  | Data setup time   | tsDI(1) | SB0(P11),<br>SI0(P11) | <ul style="list-style-type: none"> <li>• Must be specified with respect to rising edge of SIOCLK.</li> <li>• See Fig. 8.</li> </ul> | 2.7 to 5.5          | 0.03   |     |                                |      |
|               | Data hold time    | thDI(1) |                       |   |                     | 0.03   |     |                                |      |
| Serial output | Output delay time | tdD0(1) | SO0(P10),<br>SB0(P11) | <ul style="list-style-type: none"> <li>• Continuous data transfer mode</li> <li>• (Note 4-1-3)</li> </ul>                           | 2.7 to 5.5          |  |     | (1/3)t <sub>CYC</sub><br>+0.05 | μs   |
|               |                   | tdD0(2) |                       |   |                     | <ul style="list-style-type: none"> <li>• Synchronous 8-bit mode</li> <li>• (Note 4-1-3)</li> </ul> |     |                                |      |
|               | Output clock      | tdD0(3) |                       | (Note 4-1-3)  |                     |  |     | (1/3)t <sub>CYC</sub><br>+0.05 |      |

Note 4-1-3: Must be specified with respect to falling edge of SIOCLK.

Must be specified as the time to the beginning of output state change in open drain output mode. See Fig. 8.

## 2. SIO1 Serial I/O Characteristics (Note 4-2-1)

| Parameter     |                   | Symbol                 | Pin/<br>Remarks       | Conditions   | V <sub>DD</sub> [V] | Specification |     |                                |                  |  |
|---------------|-------------------|------------------------|-----------------------|--|---------------------|---------------|-----|--------------------------------|------------------|--|
|               |                   |                        |                       |  |                     | min           | typ | max                            | unit             |  |
| Serial clock  | Input clock       | Frequency              | SCK1(P15)             | See Fig. 8.  | 2.7 to 5.5          | 2             |     |                                | t <sub>CYC</sub> |  |
|               |                   | Low level pulse width  |                       |  |                     | tSCKL(3)      | 1   |                                |                  |  |
|               |                   | High level pulse width |                       |  |                     | tSCKH(3)      | 1   |                                |                  |  |
|               | Output clock      | Frequency              | SCK1(P15)             | <ul style="list-style-type: none"> <li>• When CMOS output type is selected</li> <li>• See Fig. 8.</li> </ul>   | 2.7 to 5.5          | 2             |     |                                | t <sub>SCK</sub> |  |
|               |                   | Low level pulse width  |                       |  |                     | tSCKL(4)      | 1/2 |                                |                  |  |
|               |                   | High level pulse width |                       |  |                     | tSCKH(4)      | 1/2 |                                |                  |  |
| Serial input  | Data setup time   | tsDI(2)                | SB1(P14),<br>SI1(P14) | <ul style="list-style-type: none"> <li>• Must be specified with respect to rising edge of SIOCLK.</li> <li>• See Fig. 8.</li> </ul>  | 2.7 to 5.5          | 0.03          |     |                                |                  |  |
|               | Data hold time    | thDI(2)                |                       |  |                     | 0.03          |     |                                |                  |  |
| Serial output | Output delay time | tdD0(4)                | SO1(P13),<br>SB1(P14) | <ul style="list-style-type: none"> <li>• Must be specified with respect to falling edge of SIOCLK.</li> <li>• Must be specified as the time to the beginning of output state change in open drain output mode.</li> <li>• See Fig. 8.</li> </ul> | 2.7 to 5.5          |               |     | (1/3)t <sub>CYC</sub><br>+0.05 | μs               |  |

Note 4-2-1: These specifications are theoretical values. Margins must be allowed according to the actual operating conditions.



# LC87F1HC8A

## 3. SIO4 Serial I/O Characteristics (Note 4-3-1)

|              | Parameter    | Symbol                 | Pin/<br>Remarks | Conditions | V <sub>DD</sub> [V]   | Specification |                            |                             |      |      |
|--------------|--------------|------------------------|-----------------|------------|---|---------------|----------------------------|-----------------------------|------|------|
|              |              |                        |                 |            |   | min           | typ                        | max                         | unit |      |
| Serial clock | Input clock  | Frequency              | tSCK(5)         | SCK4(P24)  | See Fig. 8.   | 2.7 to 5.5    | 2                          |                             |      | tCYC |
|              |              | Low level pulse width  | tSCKL(5)        |            |   |               | 1                          |                             |      |      |
|              |              | High level pulse width | tSCKH(5)        |            |   |               | 1                          |                             |      |      |
|              |              |                        | tSCKHA(5a)      |            |   |               | 4                          |                             |      |      |
|              |              |                        | tSCKHA(5b)      |            |   |               | 7                          |                             |      |      |
|              |              | tSCKHA(5c)             | 12              |            |   |               |                            |                             |      |      |
|              | Output clock | Frequency              | tSCK(6)         | SCK4(P24)  | <ul style="list-style-type: none"> <li>When CMOS output type is selected.</li> <li>See Fig. 8.</li> </ul> | 2.7 to 5.5    | 4/3                        |                             |      | tSCK |
|              |              | Low level pulse width  | tSCKL(6)        |            |   |               | 1/2                        |                             |      |      |
|              |              | High level pulse width | tSCKH(6)        |            |   |               | 1/2                        |                             |      |      |
|              |              | tSCKHA(6a)             | tSCKH(6)        |            |   |               | tSCKH(6)<br>+<br>(5/3)tCYC | tSCKH(6)<br>+<br>(10/3)tCYC | tCYC |      |
|              |              |                        | tSCKHA(6b)      |            |   |               | tSCKH(6)<br>+<br>(5/3)tCYC | tSCKH(6)<br>+<br>(19/3)tCYC |      |      |
|              |              |                        | tSCKHA(6c)      |            |   |               | tSCKH(6)<br>+<br>(5/3)tCYC | tSCKH(6)<br>+<br>(34/3)tCYC |      |      |

Note 4-3-1: These specifications are theoretical values. Margins must be allowed according to the actual operating conditions.

Note 4-3-2: In an application where the serial clock input is to be used in the continuous data transfer mode, the time from SI4RUN being set when serial clock is high to the falling edge of the first serial clock must be longer than tSCKHA.

Continued on next page.

# LC87F1HC8A

Continued from preceding page.

| Parameter     | Symbol            | Pin/<br>Remarks      | Conditions            | V <sub>DD</sub> [V]   | Specification |      |                                |      |    |
|---------------|-------------------|----------------------|-----------------------|---|---------------|------|--------------------------------|------|----|
|               |                   |                      |                       |   | min           | typ  | max                            | unit |    |
| Serial input  | Data setup time   | t <sub>sDI</sub> (3) | SO4(P22),<br>SI4(P23) | • Must be specified with respect to falling edge of SIOCLK.<br>• See Fig. 8   | 2.7 to 5.5    | 0.03 |                                |      | μs |
|               | Data hold time    | t <sub>hDI</sub> (3) |                       |   |               | 0.03 |                                |      |    |
| Serial output | Output delay time | t <sub>dO</sub> (5)  | SO4(P22),<br>SI4(P23) | • Must be specified with respect to rising edge of SIOCLK.<br>• Must be specified as the time to the beginning of output state change in open drain output mode.<br>• See Fig. 8. | 2.7 to 5.5    |      | (1/3)t <sub>CYC</sub><br>+0.05 |      |    |

## 4. SIO9 Serial I/O Characteristics (Note 4-4-1)

| Parameter                   | Symbol                  | Pin/<br>Remarks         | Conditions | V <sub>DD</sub> [V] | Specification |     |     |      |                  |
|-----------------------------|-------------------------|-------------------------|------------|---------------------|---------------|-----|-----|------|------------------|
|                             |                         |                         |            |                     | min           | typ | max | unit |                  |
| Serial clock<br>input clock | Frequency               | t <sub>SCK</sub> (7)    | SCK9(P27)  | See Fig. 8.         | 2.7 to 5.5    | 2   |     |      | t <sub>CYC</sub> |
|                             | Low level pulse width   | t <sub>SCKL</sub> (7)   |            |                     |               | 1   |     |      |                  |
|                             | High level pulse width  | t <sub>SCKH</sub> (7)   |            |                     |               | 1   |     |      |                  |
|                             |                         | t <sub>SCKHA</sub> (7a) |            |                     |               | 4   |     |      |                  |
|                             |                         | t <sub>SCKHA</sub> (7b) |            |                     |               | 7   |     |      |                  |
|                             | t <sub>SCKHA</sub> (7c) | 15                      |            |                     |               |     |     |      |                  |

Note 4-4-1: These specifications are theoretical values. Margins must be allowed according to the actual operating conditions.

Note 4-4-2: In an application where the serial clock input is to be used in the continuous data transfer mode, the time from SI9RUN being set when serial clock is high to the falling edge of the first serial clock must be longer than t<sub>SCKHA</sub>.

Continued on next page

# LC87F1HC8A

Continued from preceding page

| Parameter     |                            | Symbol                      | Pin/<br>Remarks       | Conditions  | V <sub>DD</sub> [V] | Specification |     |     |      |                            |                             |
|---------------|----------------------------|-----------------------------|-----------------------|---|---------------------|---------------|-----|-----|------|----------------------------|-----------------------------|
|               |                            |                             |                       |   |                     | min           | typ | max | unit |                            |                             |
| Serial clock  | Output clock               | Frequency                   | tSCK(8)               | SCK9(P27)   | 2.7 to 5.5          |               |     |     | tCYC | 4/3                        |                             |
|               |                            | Low level pulse width       | tSCKL(8)              |   |                     |               |     |     |      |                            | 1/2                         |
|               |                            | High level pulse width      | tSCKH(8)              |   |                     |               |     |     |      |                            | 1/2                         |
|               |                            |                             | tSCKHA(8a)            |   |                     |               |     |     |      | tSCKH(8)<br>+<br>(5/3)tCYC | tSCKH(8)<br>+<br>(10/3)tCYC |
|               |                            |                             | tSCKHA(8b)            |   |                     |               |     |     |      | tSCKH(8)<br>+<br>(5/3)tCYC | tSCKH(8)<br>+<br>(19/3)tCYC |
| tSCKHA(8c)    | tSCKH(8)<br>+<br>(5/3)tCYC | tSCKH(8)<br>+<br>(43/3)tCYC |                       |   |                     |               |     |     |      |                            |                             |
| Serial input  | Data setup time            | tsDI(4)                     | SO9(P25),<br>SI9(P26) | <ul style="list-style-type: none"> <li>Must be specified with respect to rising edge of SIOCLK.</li> <li>See Fig. 8.</li> </ul>   | 2.7 to 5.5          |               |     |     | μs   | 0.03                       |                             |
|               | Data hold time             | thDI(4)                     |                       |   |                     |               |     |     |      | 0.03                       |                             |
| Serial output | Output delay time          | tdDO(6)                     | SO9(P25),<br>SI9(P26) | <ul style="list-style-type: none"> <li>Must be specified with respect to falling edge of SIOCLK.</li> <li>Must be specified as the time to the beginning of output state change in open drain output mode</li> <li>See Fig. 8.</li> </ul> | 2.7 to 5.5          |               |     |     |      | (1/3)tCYC<br>+0.05         |                             |

# LC87F1HC8A

## Pulse Input Conditions at Ta = -40°C to +85°C, VSS1 = VSS2 = VSS3 = 0V

| Parameter                  | Symbol             | Pin/Remarks  | Conditions  | Specification |     |     |     |                    |
|----------------------------|--------------------|--|---|---------------|-----|-----|-----|--------------------|
|                            |                    |  |   | VDD[V]        | min | typ | max | unit               |
| High/low level pulse width | tP1H(1)<br>tP1L(1) | INT0(P70), INT1(P71),<br>INT2(P72),<br>INT4(P20 to P23),<br>INT5(P24 to P27),<br>INT6(P20),<br>INT7(P24) | <ul style="list-style-type: none"> <li>Interrupt source flag can be set.</li> <li>Event inputs for timer 0 or 1 are enabled.</li> </ul> | 2.7 to 5.5    | 1   |     |     | tCYC               |
|                            | tPIH(2)<br>tPIL(2) | INT3(P73) when noise filter time constant is 1/1   | <ul style="list-style-type: none"> <li>Interrupt source flag can be set.</li> <li>Event inputs for timer 0 are enabled.</li> </ul>      | 2.7 to 5.5    | 2   |     |     |                    |
|                            | tPIH(3)<br>tPIL(3) | INT3(P73) when noise filter time constant is 1/32  | <ul style="list-style-type: none"> <li>Interrupt source flag can be set.</li> <li>Event inputs for timer 0 are enabled.</li> </ul>      | 2.7 to 5.5    | 64  |     |     |                    |
|                            | tPIH(4)<br>tPIL(4) | INT3(P73) when noise filter time constant is 1/128   | <ul style="list-style-type: none"> <li>Interrupt source flag can be set.</li> <li>Event inputs for timer 0 are enabled.</li> </ul>      | 2.7 to 5.5    | 256 |     |     |                    |
|                            | tPIL(5)            | RMIN(P73)  | Recognized by the infrared remote control receiver circuit as a signal  | 2.7 to 5.5    | 4   |     |     | RMCK<br>(Note 5-1) |
|                            | tPIL(6)            | RES  | Resetting is enabled.   | 2.7 to 5.5    | 200 |     |     | μs                 |

Note 5-1: Represents the period of the reference clock (1 tCYC to 128 tCYC or the source frequency of the subclock) for the infrared remote control receiver circuit.

## AD Converter Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = VSS3 = 0V

| Parameter                  | Symbol | Pin/Remarks  | Conditions   | Specification |                         |     |                        |      |
|----------------------------|--------|--|--|---------------|-------------------------|-----|------------------------|------|
|                            |        |  |  | VDD[V]        | min                     | typ | max                    | unit |
| Resolution                 | N      | AN0(P00) to AN7(P07), AN8(P70), AN9(P71), AN10(XT1), AN11(XT2) |  | 3.0 to 5.5    |                         | 8   |                        | bit  |
| Absolute accuracy          | ET     |  | (Note 6-1)   | 3.0 to 5.5    |                         |     | ±1.5                   | LSB  |
| Conversion time            | TCAD   |  | AD conversion time=32×tCYC (when ADCR2=0) (Note 6-2) | 4.5 to 5.5    | 15.68<br>(tCYC=0.490μs) |     | 97.92<br>(tCYC=3.06μs) | μs   |
|                            |        |  |  | 3.0 to 5.5    | 23.52<br>(tCYC=0.735μs) |     | 97.92<br>(tCYC=3.06μs) |      |
|                            |        |  | AD conversion time=64×tCYC (when ADCR2=1) (Note 6-2) | 4.5 to 5.5    | 18.82<br>(tCYC=0.294μs) |     | 97.92<br>(tCYC=1.53μs) |      |
|                            |        |  |  | 3.0 to 5.5    | 47.04<br>(tCYC=0.735μs) |     | 97.92<br>(tCYC=1.53μs) |      |
| Analog input voltage range | VAIN   |  |  | 3.0 to 5.5    | VSS                     |     | VDD                    | V    |
| Analog port input current  | IAINH  |  | VAIN=VDD   | 3.0 to 5.5    |                         |     | 1                      | μA   |
|                            | IAINL  |  | VAIN=VSS   | 3.0 to 5.5    | -1                      |     |                        |      |

Note 6-1: The quantization error (±1/2LSB) is excluded from the absolute accuracy.

Note 6-2: The conversion time refers to the period from the time when an instruction for starting a conversion process is issued to the time the conversion results register(s) are loaded with a complete digital conversion value corresponding to the analog input value.

# LC87F1HC8A

## Consumption Current Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = VSS3 = 0V

| Parameter                                     | Symbol      | Pin/<br>Remarks        | Conditions  | Specification |     |      |      |      |
|---|-------------|------------------------|---|---------------|-----|------|------|------|
|   |             |                        |   | VDD[V]        | min | typ  | max  | unit |
| Normal mode consumption current<br>(Note 7-1) | IDDOP(1)    | VDD1<br>=VDD2<br>=VDD3 | <ul style="list-style-type: none"> <li>FmCF=12MHz ceramic oscillation mode</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 12MHz side</li> <li>Internal PLL oscillation stopped</li> <li>Internal RC oscillation stopped</li> <li>USB circuit stopped</li> <li>1/1 frequency division ratio</li> </ul>                       | 4.5 to 5.5    |     | 9.8  | 24   | mA   |
|   | IDDOP(2)    |                        | <ul style="list-style-type: none"> <li>Internal PLL oscillation stopped</li> <li>Internal RC oscillation stopped</li> <li>USB circuit stopped</li> <li>1/1 frequency division ratio</li> </ul>  | 3.0 to 3.6    |     | 5.7  | 14   |      |
|   | IDDOP(3)    |                        | <ul style="list-style-type: none"> <li>FmCF=12MHz ceramic oscillation mode</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 12MHz side</li> <li>Internal PLL oscillation mode active</li> <li>Internal RC oscillation stopped</li> <li>USB circuit active</li> <li>1/1 frequency division ratio</li> </ul>                    | 4.5 to 5.5    |     | 15   | 35   |      |
|   | IDDOP(4)    |                        | <ul style="list-style-type: none"> <li>Internal PLL oscillation mode active</li> <li>Internal RC oscillation stopped</li> <li>USB circuit active</li> <li>1/1 frequency division ratio</li> </ul>   | 3.0 to 3.6    |     | 7.7  | 20   |      |
|   | IDDOP(5)    |                        | <ul style="list-style-type: none"> <li>FmCF=12MHz ceramic oscillation mode</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 6MHz side</li> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>   | 4.5 to 5.5    |     | 6.7  | 16   |      |
|   | IDDOP(6)    |                        | <ul style="list-style-type: none"> <li>System clock set to 6MHz side</li> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>  | 3.0 to 3.6    |     | 3.9  | 9.0  |      |
|   | IDDOP(7)    |                        | <ul style="list-style-type: none"> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>   | 2.7 to 3.0    |     | 3.2  | 7.3  |      |
|   | IDDOP(8)    |                        | <ul style="list-style-type: none"> <li>FmCF=0Hz(oscillation stopped)</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to internal RC oscillation.</li> <li>1/2 frequency division ratio</li> </ul>   | 4.5 to 5.5    |     | 0.72 | 3.4  |      |
|   | IDDOP(9)    |                        | <ul style="list-style-type: none"> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to internal RC oscillation.</li> <li>1/2 frequency division ratio</li> </ul>  | 3.0 to 3.6    |     | 0.41 | 1.9  |      |
|   | IDDOP(10)   |                        | <ul style="list-style-type: none"> <li>System clock set to internal RC oscillation.</li> <li>1/2 frequency division ratio</li> </ul>  | 2.7 to 3.0    |     | 0.35 | 1.5  |      |
|   | IDDOP(11)   |                        | <ul style="list-style-type: none"> <li>FmCF=0Hz(oscillation stopped)</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to crystal oscillation.</li> <li>(32.768kHz)</li> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>   | 4.5 to 5.5    |     | 45   | 184  |      |
|   | IDDOP(12)   |                        | <ul style="list-style-type: none"> <li>System clock set to crystal oscillation.</li> <li>(32.768kHz)</li> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>  | 3.0 to 3.6    |     | 18   | 65   |      |
|   | IDDOP(13)   |                        | <ul style="list-style-type: none"> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>   | 2.7 to 3.0    |     | 14   | 47   |      |
| HALT mode consumption current<br>(Note7-1)    | IDDHALT(1)  |                        | <ul style="list-style-type: none"> <li>HALT mode</li> <li>FmCF=12MHz ceramic oscillation mode</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 12MHz side</li> <li>Internal PLL oscillation stopped</li> <li>Internal RC oscillation stopped</li> <li>USB circuit stopped</li> <li>1/1 frequency division ratio</li> </ul>    | 4.5 to 5.5    |     | 4.9  | 12   | mA   |
|   | IDDHALT(2)  |                        | <ul style="list-style-type: none"> <li>Internal PLL oscillation stopped</li> <li>Internal RC oscillation stopped</li> <li>USB circuit stopped</li> <li>1/1 frequency division ratio</li> </ul>  | 3.0 to 3.6    |     | 2.7  | 6.4  |      |
|   | IDDHALT(3)  |                        | <ul style="list-style-type: none"> <li>HALT mode</li> <li>FmCF=12MHz ceramic oscillation mode</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 12MHz side</li> <li>Internal PLL oscillation mode active</li> <li>Internal RC oscillation stopped</li> <li>USB circuit active</li> <li>1/1 frequency division ratio</li> </ul> | 4.5 to 5.5    |     | 9.5  | 23   |      |
|   | IDDHALT(4)  |                        | <ul style="list-style-type: none"> <li>Internal PLL oscillation mode active</li> <li>Internal RC oscillation stopped</li> <li>USB circuit active</li> <li>1/1 frequency division ratio</li> </ul>   | 3.0 to 3.6    |     | 4.7  | 12   |      |
|   | IDDHALT(5)  |                        | <ul style="list-style-type: none"> <li>HALT mode</li> <li>FmCF=12MHz ceramic oscillation mode</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 6MHz side</li> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>  | 4.5 to 5.5    |     | 3.0  | 7.3  |      |
|   | IDDHALT(6)  |                        | <ul style="list-style-type: none"> <li>System clock set to 6MHz side</li> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>  | 3.0 to 3.6    |     | 1.6  | 3.8  |      |
|   | IDDHALT(7)  |                        | <ul style="list-style-type: none"> <li>Internal RC oscillation stopped</li> <li>1/2 frequency division ratio</li> </ul>   | 2.7 to 3.0    |     | 1.3  | 2.9  |      |
|   | IDDHALT(8)  |                        | <ul style="list-style-type: none"> <li>HALT mode</li> <li>FmCF=0Hz(oscillation stopped)</li> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to internal RC oscillation.</li> <li>1/2 frequency division ratio</li> </ul>  | 4.5 to 5.5    |     | 0.41 | 2.0  |      |
|   | IDDHALT(9)  |                        | <ul style="list-style-type: none"> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to internal RC oscillation.</li> <li>1/2 frequency division ratio</li> </ul>  | 3.0 to 3.6    |     | 0.20 | 0.95 |      |
|   | IDDHALT(10) |                        | <ul style="list-style-type: none"> <li>System clock set to internal RC oscillation.</li> <li>1/2 frequency division ratio</li> </ul>  | 2.7 to 3.0    |     | 0.17 | 0.70 |      |

Note 7-1: The consumption current value includes none of the currents that flow into the output Tr and internal pull-up resistors.

Continued on next page.

# LC87F1HC8A

Continued from preceding page.

| Parameter                                   | Symbol      | Pin/<br>Remarks  | Conditions  | Specification       |     |      |     |      |
|---|-------------|--|---|---------------------|-----|------|-----|------|
|   |             |  |   | V <sub>DD</sub> [V] | min | typ  | max | unit |
| HALT mode consumption current<br>(Note 7-1) | IDDHALT(11) | V <sub>DD1</sub><br>=V <sub>DD2</sub><br>=V <sub>DD3</sub> | <ul style="list-style-type: none"> <li>• HALT mode</li> <li>• FmCF=0MHz (oscillation stopped)</li> <li>• FsX'tal=32.768kHz crystal oscillation mode (32.768kHz)</li> <li>• System clock set to crystal oscillation.</li> <li>• Internal RC oscillation stopped</li> <li>• 1/2 frequency division ratio</li> </ul> | 4.5 to 5.5          |     | 31   | 132 | μA   |
|   | IDDHALT(12) |  |   | 3.0 to 3.6          |     | 9.1  | 39  |      |
|   | IDDHALT(13) |  |   | 2.7 to 3.0          |     | 6.3  | 27  |      |
| HOLD mode consumption current               | IDDHOLD(1)  | V <sub>DD1</sub>   | <ul style="list-style-type: none"> <li>• HOLD mode</li> <li>• CF1=V<sub>DD</sub> or open (External clock mode)</li> </ul>   | 4.5 to 5.5          |     | 0.14 | 39  |      |
|   | IDDHOLD(2)  |  |   | 3.0 to 3.6          |     | 0.04 | 19  |      |
|   | IDDHOLD(3)  |  |   | 2.7 to 3.0          |     | 0.04 | 17  |      |
| Timer HOLD mode consumption current         | IDDHOLD(4)  |  | <ul style="list-style-type: none"> <li>• Timer HOLD mode</li> <li>• CF1=V<sub>DD</sub> or open (External clock mode)</li> <li>• FsX'tal=32.768kHz crystal oscillation mode</li> </ul>   | 4.5 to 5.5          |     | 25   | 115 |      |
|   | IDDHOLD(5)  |  |   | 3.0 to 3.6          |     | 6.0  | 32  |      |
|   | IDDHOLD(6)  |  |   | 2.7 to 3.0          |     | 3.7  | 20  |      |

Note 7-1: The consumption current value includes none of the currents that flow into the output Tr and internal pull-up resistors

## USB Characteristics and Timing at Ta = -40°C to +85°C, V<sub>SS1</sub> = V<sub>SS2</sub> = V<sub>SS3</sub> = 0V

| Parameter                            | Symbol                | Conditions                                  | Specification |     |     |      |
|--------------------------------------|-----------------------|---|---------------|-----|-----|------|
|                                      |                       |   | min           | typ | max | unit |
| High level output                    | V <sub>OH</sub> (USB) | • 15kΩ±5% to GND                            | 2.8           |     | 3.6 | V    |
| Low level output                     | V <sub>OL</sub> (USB) | • 1.5kΩ±5% to 3.6V                          | 0.0           |     | 0.3 | V    |
| Output signal crossover voltage      | V <sub>CRS</sub>      |   | 1.3           |     | 2.0 | V    |
| Differential input sensitivity       | V <sub>DI</sub>       | •  (UHD+)-(UHD-)                            | 0.2           |     |     | V    |
| Differential input common mode range | V <sub>CM</sub>       |   | 0.8           |     | 2.5 | V    |
| High level input                     | V <sub>IH</sub> (USB) |   | 2.0           |     |     | V    |
| Low level input                      | V <sub>IL</sub> (USB) |   |               |     | 0.8 | V    |
| USB data rise time                   | t <sub>R</sub>        | • R <sub>S</sub> =33Ω, C <sub>L</sub> =50pF | 4             |     | 20  | ns   |
| USB data fall time                   | t <sub>F</sub>        | • R <sub>S</sub> =33Ω, C <sub>L</sub> =50pF | 4             |     | 20  | ns   |

## F-ROM Programming Characteristics at Ta = +10°C to +55°C, V<sub>SS1</sub> = 0V

| Parameter                   | Symbol   | Pin/<br>Remarks  | Conditions   | Specification       |     |     |     |      |
|-----------------------------|----------|------------------|--|---------------------|-----|-----|-----|------|
|                             |          |                  |  | V <sub>DD</sub> [V] | min | typ | max | unit |
| Onboard programming current | IDDFW(1) | V <sub>DD1</sub> | • Excluding power dissipation in the microcontroller block | 3.0 to 5.5          |     | 5   | 10  | mA   |
| Programming time            | tFW(1)   |                  | • Erase operation  | 3.0 to 5.5          |     | 20  | 30  | ms   |
|                             | tFW(2)   |                  | • Write operation  |                     |     | 40  | 60  | μs   |

## Characteristics of a Sample Main System Clock Oscillation Circuit

Given below are the characteristics of a sample main system clock oscillation circuit that are measured using a SANYO-designated oscillation characteristics evaluation board and external components with circuit constant values with which the oscillator vendor confirmed normal and stable oscillation.

Table 1 shows the characteristics of a oscillation circuit when USB host function is not used.

If USB host function is to be used, it is absolutely recommended to use an oscillator that satisfies the precision and stability according to the USB standards.

Table 1 Characteristics of a Sample Main System Clock Oscillator Circuit with a Ceramic Oscillator

| Nominal Frequency | Vendor Name | Oscillator Name    | Circuit Constant |         |                  | Operating Voltage Range [V] | Oscillation Stabilization Time |          | Remarks                       |
|-------------------|-------------|--------------------|------------------|---------|------------------|-----------------------------|--------------------------------|----------|-------------------------------|
|                   |             |                    | C1 [pF]          | C2 [pF] | Rd1 [ $\Omega$ ] |                             | typ [ms]                       | max [ms] |                               |
| 6MHz              | MURATA      | CSTCR6M00GH5L**-R0 | (39)             | (39)    | 1k               | 2.7 to 5.5                  | 0.1                            | 0.5      | C1 and C2 integrated SMD type |
| 8MHz              | MURATA      | CSTCE8M00GH5L**-R0 | (33)             | (33)    | 470              | 3.0 to 5.5                  | 0.1                            | 0.5      |                               |
| 10MHz             | MURATA      | CSTCE10M0GH5L**-R0 | (33)             | (33)    | 330              | 3.0 to 5.5                  | 0.1                            | 0.5      |                               |
| 12MHz             | MURATA      | CSTCE12M0GH5L**-R0 | (33)             | (33)    | 330              | 3.0 to 5.5                  | 0.1                            | 0.5      |                               |

The oscillation stabilization time refers to the time interval that is required for the oscillation to get stabilized in the following cases (see Figure 4):

- Till the oscillation gets stabilized after  $V_{DD}$  goes above the operating voltage lower limit.
- Till the oscillation gets stabilized after the instruction for starting the main clock oscillation circuit is executed
- Till the oscillation gets stabilized after the HOLD mode is reset.
- Till the oscillation gets stabilized after the X'tal HOLD mode is reset with CFSTOP (OCR register, bit 0) set to 0

## Characteristics of a Sample Subsystem Clock Oscillator Circuit

Given below are the characteristics of a sample subsystem clock oscillation circuit that are measured using a SANYO-designated oscillation characteristics evaluation board and external components with circuit constant values with which the oscillator vendor confirmed normal and stable oscillation.

Table 2 Characteristics of a Sample Subsystem Clock Oscillator Circuit with a Crystal Oscillator

| Nominal Frequency | Vendor Name   | Oscillator Name | Circuit Constant |         |                 |                  | Operating Voltage Range [V] | Oscillation Stabilization Time |         | Remarks                             |
|-------------------|---------------|-----------------|------------------|---------|-----------------|------------------|-----------------------------|--------------------------------|---------|-------------------------------------|
|                   |               |                 | C3 [pF]          | C4 [pF] | Rf [ $\Omega$ ] | Rd2 [ $\Omega$ ] |                             | typ [s]                        | max [s] |                                     |
| 32.768kHz         | EPSON TOYOCOM | MC-306          | 18               | 18      | OPEN            | 560k             | 2.7 to 5.5                  | 1.1                            | 3.0     | Applicable CL value=12.5pF SMD type |

The oscillation stabilization time refers to the time interval that is required for the oscillation to get stabilized in the following cases (see Figure 4):

- Till the oscillation gets stabilized after the instruction for starting the subclock oscillation circuit is executed
- Till the oscillation gets stabilized after the HOLD mode is reset with EXTOSC (OCR register, bit 6) set to 1

Note: The components that are involved in oscillation should be placed as close to the IC and to one another as possible because they are vulnerable to the influences of the circuit pattern.

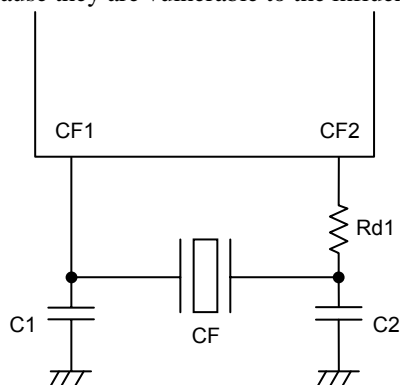


Figure 1 CF Oscillator Circuit

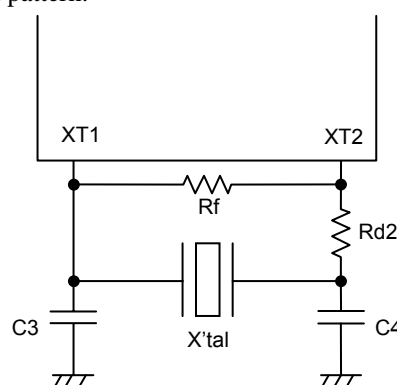


Figure 2 Crystal Oscillator Circuit

# LC87F1HC8A






Figure 3 AC Timing Measurement Point

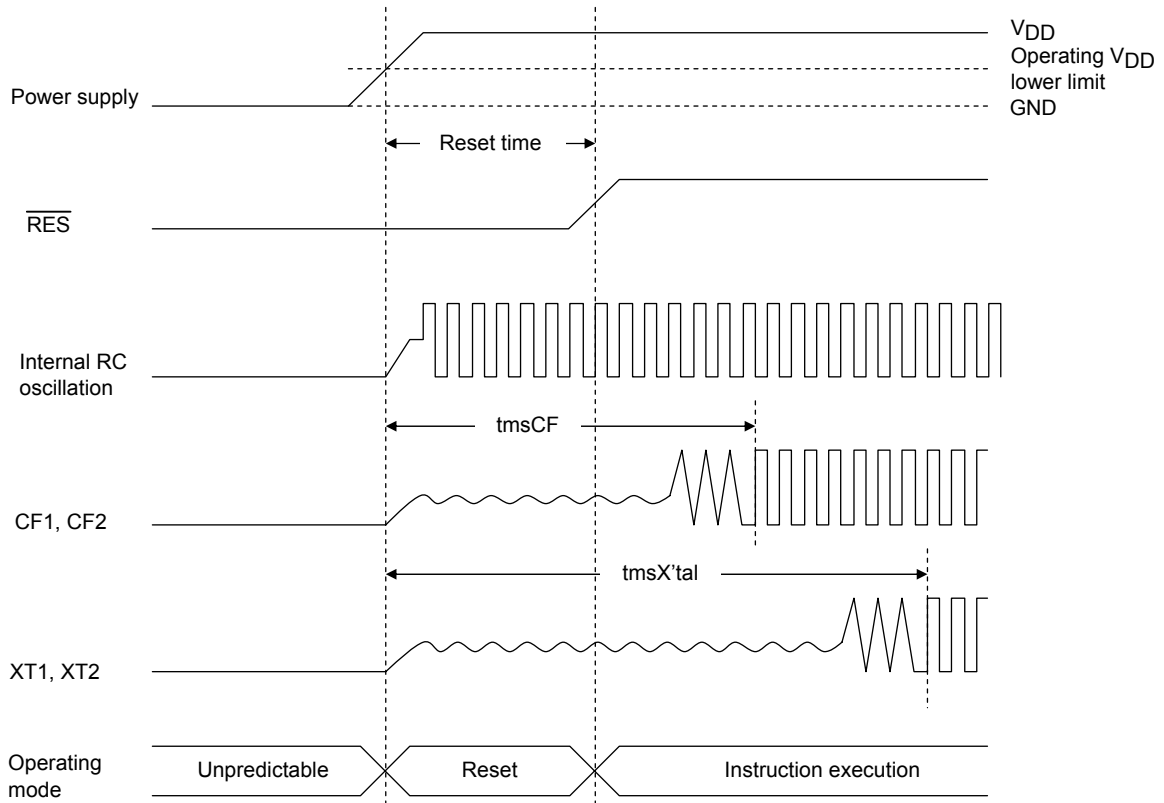


## Reset Time and Oscillation Stabilization Time

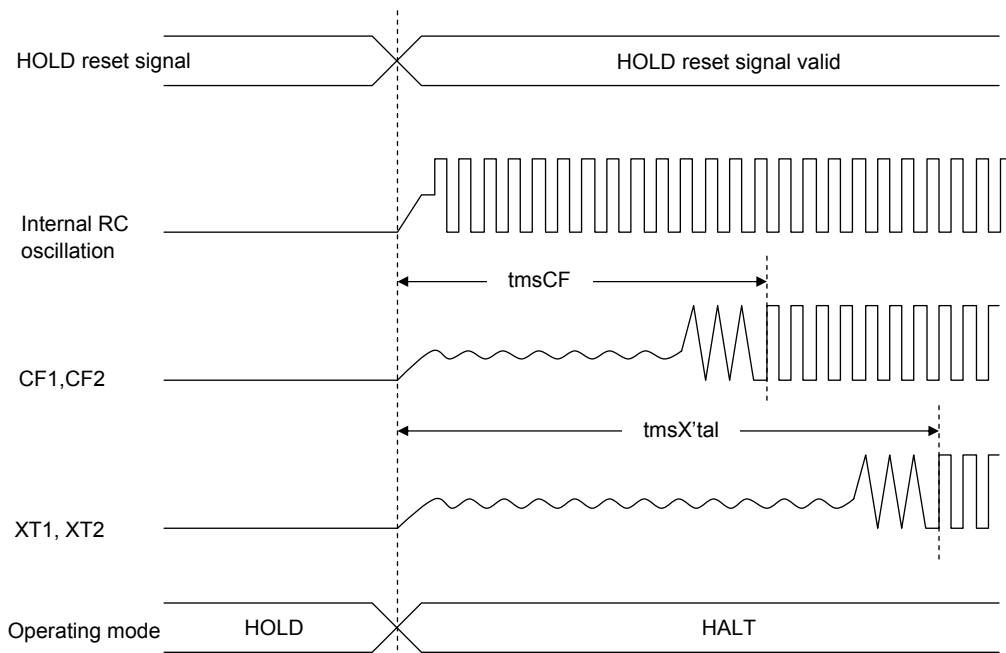

## HOLD Reset Signal and Oscillation Stabilization Time


Figure 4 Oscillation Stabilization Time



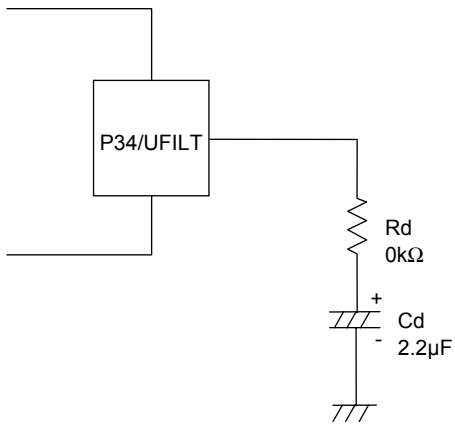


When using the internal PLL circuit to generate the 48MHz clock for USB , it is necessary to connect a filter circuit such to the P34/UFILT pin such as that shown in the left Fig.

Figure 5 External Filter Circuit for the Internal USB-dedicated PLL Circuit

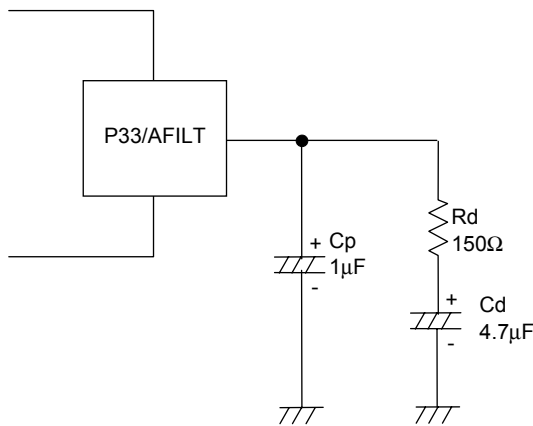

To generate the master clock for the audio interface using the internal PLL circuit, it is necessary to connect a filter circuit to the P33/AFILT pin that is shown in the left Fig.


Figure 6 External Filter Circuit for Audio Interface (Used with Internal PLL Circuit)

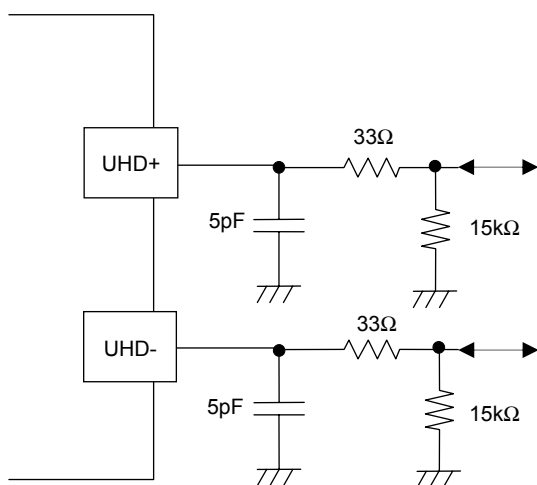

It's necessary to adjust the Circuit Constant of the USB Port Peripheral Circuit for each mounting board.

Figure 7 USB Port Peripheral Circuit

# LC87F1HC8A

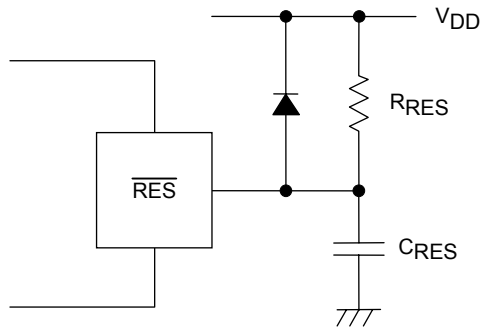

Note:  
Determine the value of  $C_{RES}$  and  $R_{RES}$  so that the reset signal is present for a period of  $200\mu s$  after the supply voltage goes beyond the lower limit of the IC's operating voltage.

Figure 8 Reset Circuit

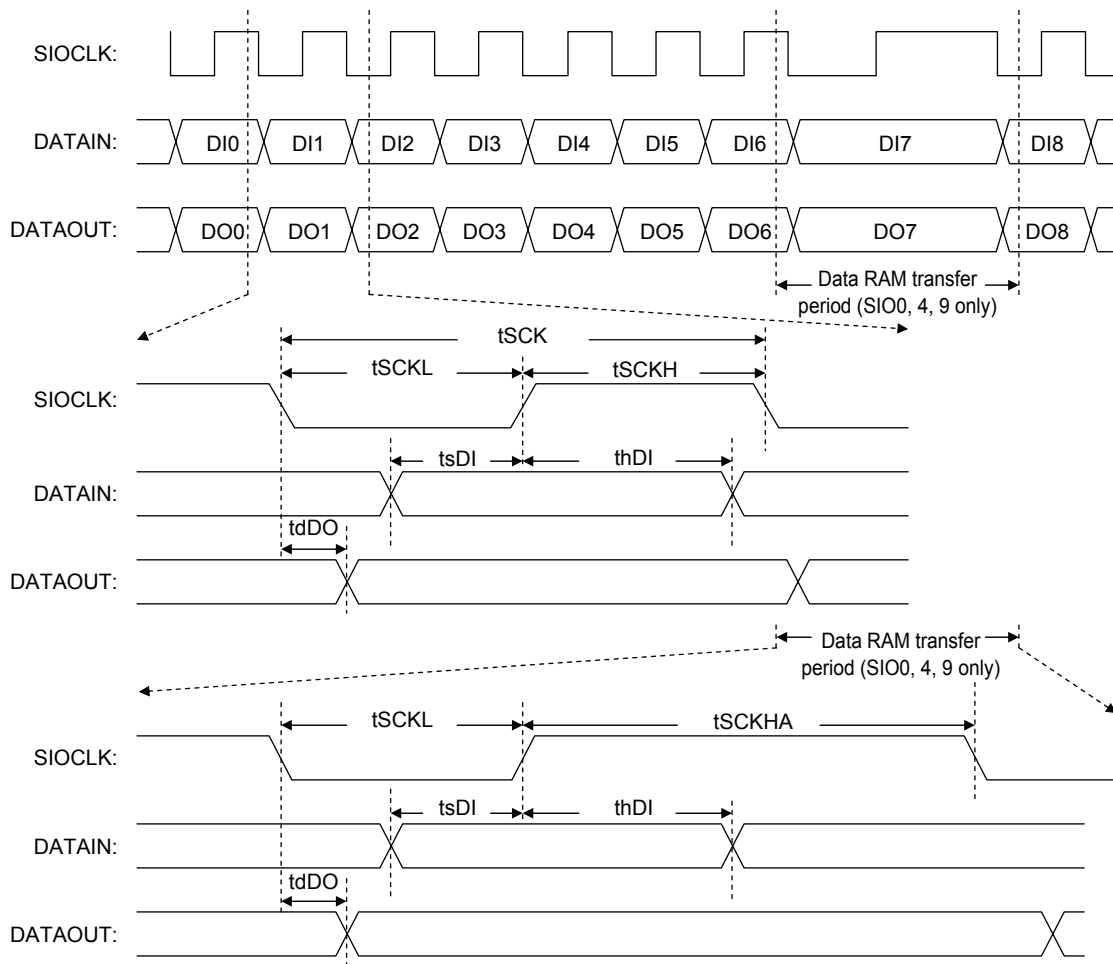


Figure 9 Serial Input/Output Waveform

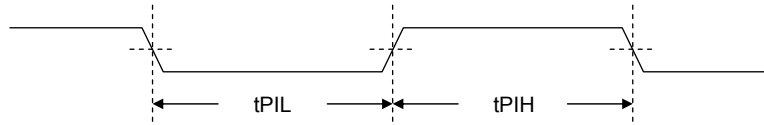


Figure 10 Pulse Input Timing Signal Waveform

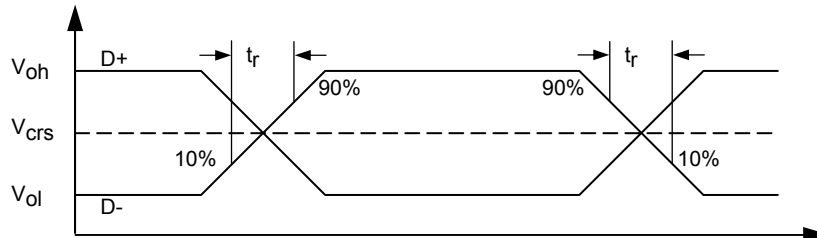


Figure 11 USB Data Signal Timing and Voltage Level

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of January, 2008. Specifications and information herein are subject to change without notice.