

**Data Sheet**
telephone
949 252 0522

 BACK

Product Category: RF SAW Filter

Part Number	Package	Application	Last Modified
802-RF465.0M-D	3.0 x 3.0 SMD	CDMA450	Jan. 01, 2007

TYPE :

CDMA450, RF-Rx SAW Filter





PART NUMBER :

802-RF465.0M-D**OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

PARAMETERS	Condition	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	-	465.0	-	MHz
Maximum Insertion Loss	462.5~ 467.5MHz	-	2.6	4.3	dB
Stop Band Attenuation:	0.3~ 452.5 MHz	40	50	-	dB
	452.5~ 457.5 MHz	35	47	-	
	485.0~ 507.5MHz	40	50	-	
	507.5~ 1200.0 MHz	30	44	-	
	1200.0~ 1700.0 MHz	20	40	-	
Source Impedance (single ended)*	-	-	50	-	ohm
Load Impedance (single ended)*	-	-	50	-	ohm
VSWR	462.5~ 467.5MHz	-	1.5	2.1	-
Maximum Input Power	-	-	-	27	dBm
Operating Temperature	-	-30	-	+80	°C



* No Matching Network

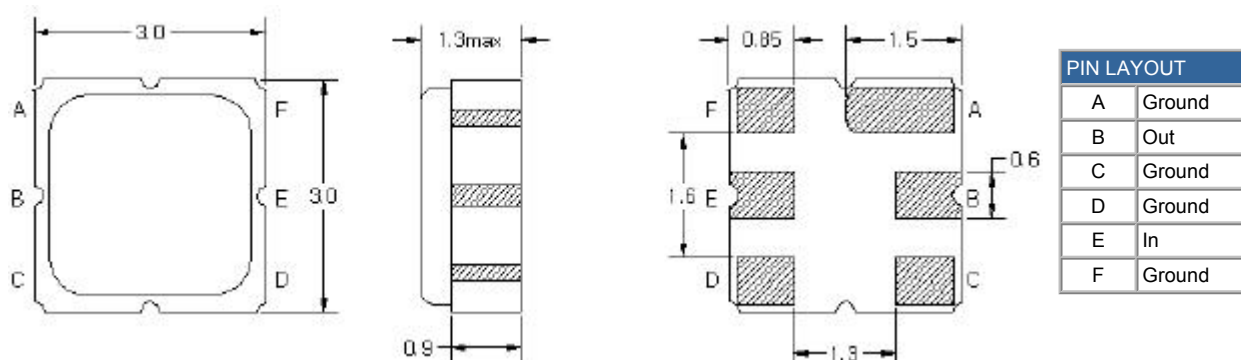PACKAGE OUTLINE (mm)**TEST FIXTURE**


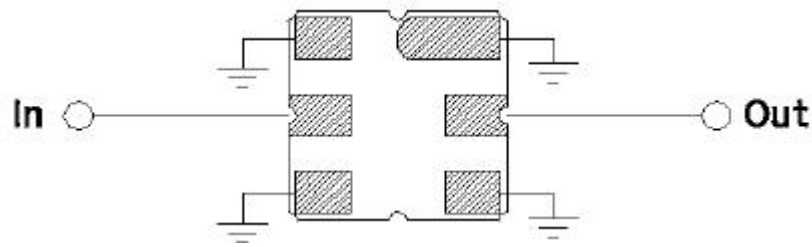


Source/ Load Impedance = 50 ohms



FREQUENCY RESPONSE

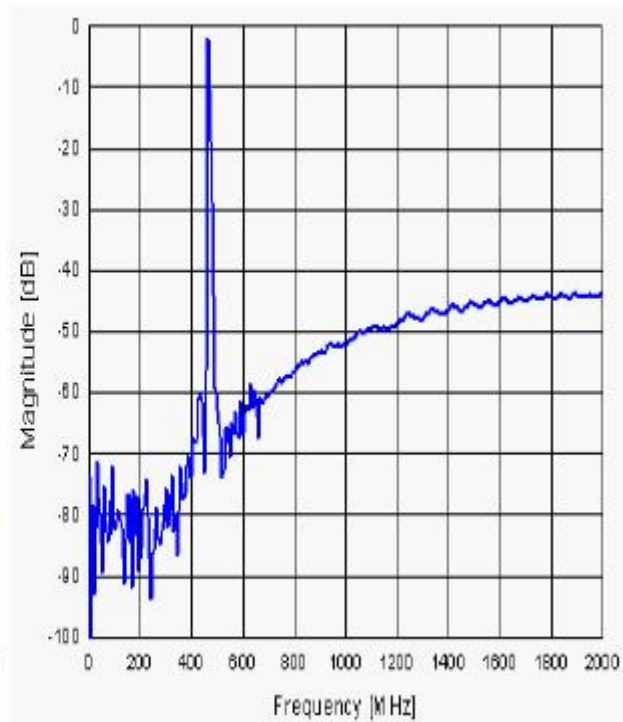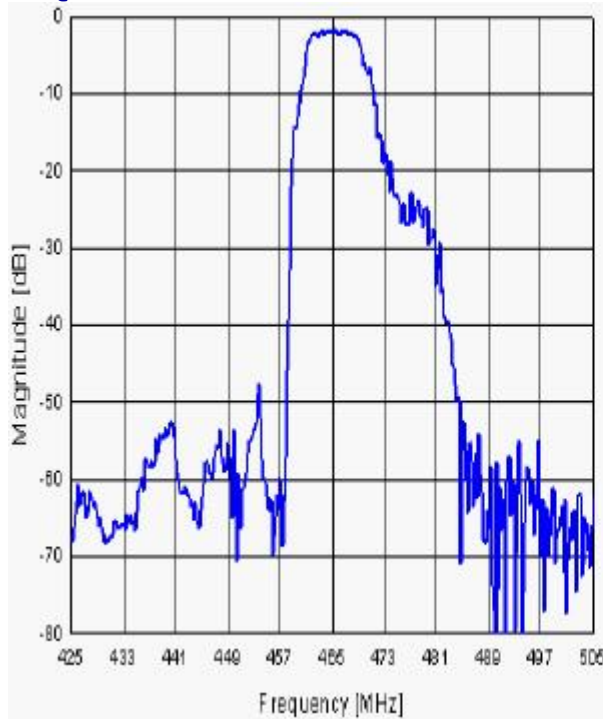

VSWR

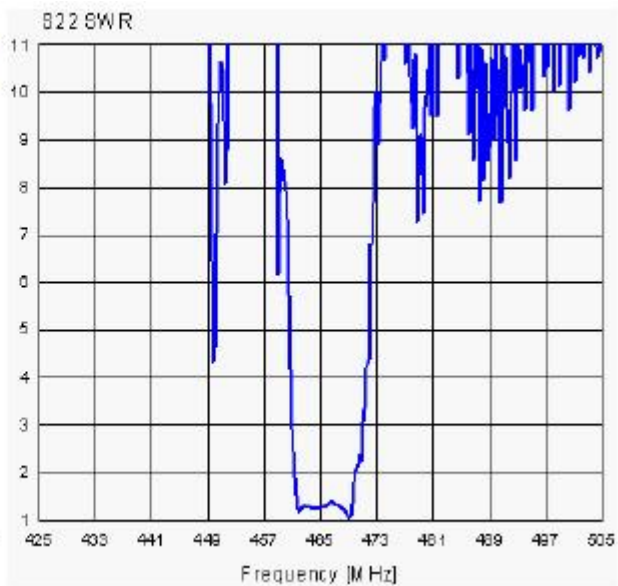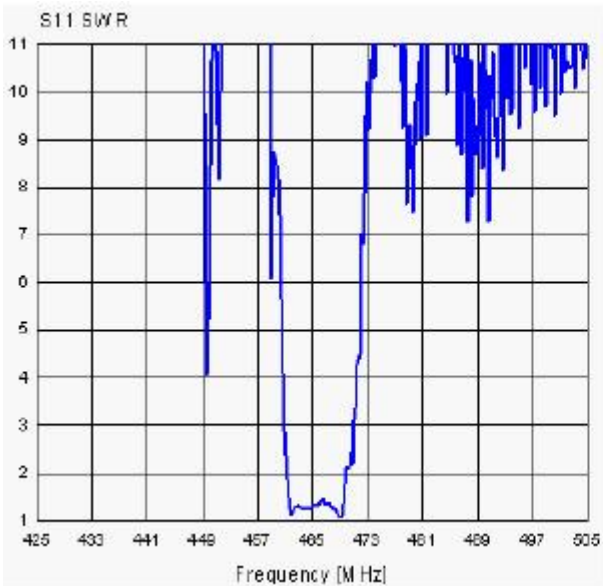

SMITH CHART

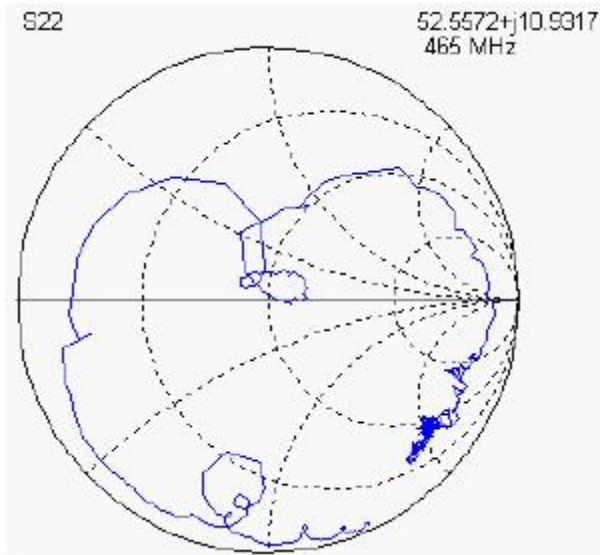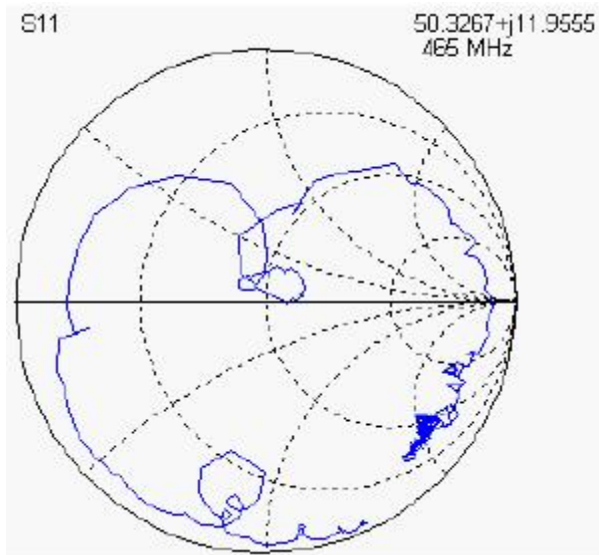

Oscilent Corporation - CALL **949.252.0522**

18195 East McDermott Street , Building D , Irvine , CA 92614 , USA

Fax: 949.252.0599 , E-Mail: Sales@Oscilent.com

Part No.: 802-RF465.0M-D