


Agilent E1412A 6.5-Digit High-Accuracy Multimeter C-Size

Data Sheet

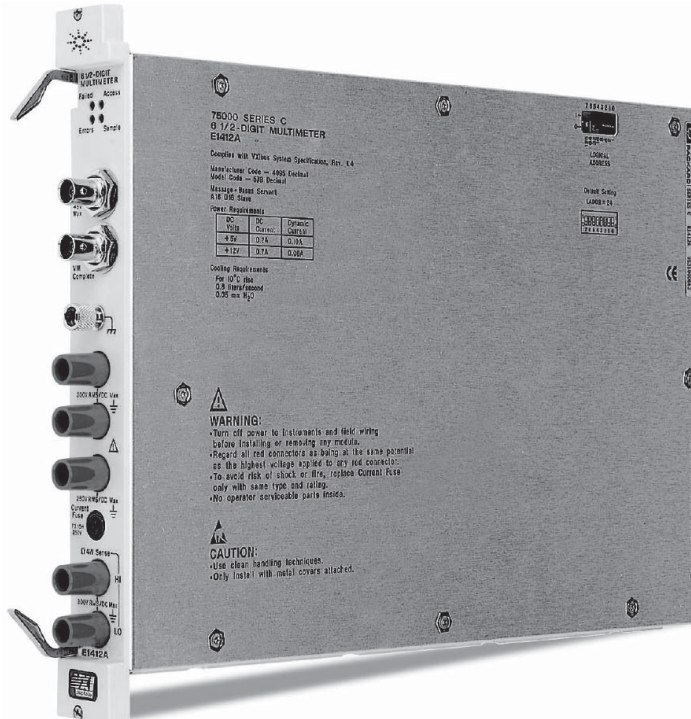

Features

- 1-Slot, C-size, message-based
- DCV, ACV, DCI, ACI, 2/4-wire Ω , frequency, period
- NULL, MIN/MAX, LIMIT, dB, dBm
- 1000 reading/s into internal memory at 4.5 digits
- Fast range/function changes
- Reading storage with internal memory

Description

The Agilent Technologies E1412A 6.5-Digit Multimeter is a C-size, 1-slot, message-based VXI module. It is identical in electrical design to the E1312A, differing only in size. It delivers the widest functionality in Agilent's DMM line. It also delivers high performance and Agilent high quality at prices you'd expect to pay for a 5.5-digit DMM.

This multimeter's wide product functionality includes volts, amps, ohms, and frequency with advanced tests including limit checks to drive a TTL output and

dc voltage ratios. Standard measurements include ac/dc voltage, ac/dc current, 2- and 4-wire Ω , plus frequency/period. When measuring dcV, this multimeter can deliver 65 range changes per second and 30 function changes per second.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



Agilent Technologies

DC Specifications

Specifications are for 1-hour warm-up at an integration time of 100 PLCs.

DC Summary:

DC voltage: 300 V max.
Voltage accuracy (dc): $\pm 0.0019\%$

DC Accuracy $\pm$ (% of reading + % of range): Specifications for 1-hour warm-up at 6.5 digits

DC voltage:

Range ²	Test Current or Burden Voltage	24 Hour ¹ 23°C $\pm$ 1°C	90 Day 23°C $\pm$ 5°C	1 Year 23°C $\pm$ 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
100.0000 mV		0.0030 + 0.0030	0.0040 + 0.0035	0.0050 + 0.0035	0.0005 + 0.0005
1.000000 V		0.0020 + 0.0006	0.0030 + 0.0007	0.0040 + 0.0007	0.0005 + 0.0001
10.00000 V		0.0015 + 0.0004	0.0020 + 0.0005	0.0035 + 0.0005	0.0005 + 0.0001
100.0000 V		0.0020 + 0.0006	0.0035 + 0.0006	0.0045 + 0.0006	0.0005 + 0.0001
300.0000 V		0.0020 + 0.0018	0.0035 + 0.0030	0.0045 + 0.0030	0.0005 + 0.0003

Range Resistance: ³	Test Current or Burden Voltage	24 Hour ¹ 23°C $\pm$ 1°C	90 Day 23°C $\pm$ 5°C	1 Year 23°C $\pm$ 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
100.0000 Ω	1 mA	0.0030 + 0.0030	0.008 + 0.004	0.010 + 0.004	0.0006 + 0.0005
1.000000 k Ω	1 mA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
10.00000 k Ω	100 μ A	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
100.0000 k Ω	10 μ A	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
1.000000 M Ω	5 μ A	0.002 + 0.001	0.008 + 0.001	0.010 + 0.001	0.0010 + 0.0002
10.00000 M Ω	500 nA	0.015 + 0.001	0.035 + 0.001	0.054 + 0.001	0.0030 + 0.0004
100.0000 M Ω	500 nA 10 M Ω	0.300 + 0.010	0.800 + 0.010	0.800 + 0.010	0.1500 + 0.0002

Range dc current:	Test Current or Burden Voltage	24 Hour 23°C $\pm$ 1°C	90 Day 23°C $\pm$ 5°C	1 Year 23°C $\pm$ 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
10.00000 mA	<0.1 V	0.005 + 0.010	0.050 + 0.020	0.070 + 0.020	0.005 + 0.0020
100.0000 mA	<0.6 V	0.01 + 0.004	0.040 + 0.005	0.070 + 0.005	0.006 + 0.0005
1.000000 A	<1 V	0.10 + 0.006	0.130 + 0.010	0.150 + 0.010	0.005 + 0.0010
3.000000 A	<2 V	0.70 + 0.020	0.720 + 0.020	0.720 + 0.020	0.005 + 0.0020

DC:DC Ratio:

Range²

100 mV to 300 V: (Input Accuracy) + (Reference Accuracy)

Input Accuracy = accuracy specification for the HI-LO input signal

Reference Accuracy = accuracy specification for HI-LO reference input signal

¹ Relative to calibration standards.

² 20% overrange on all ranges, except 300 Vdc and 3 A range.

³ Specifications are for 4-wire Ω function, or 2-wire Ω using Math Null, without Math Null, add 0.2 Ω additional error in 2-wire Ω function.

DC Specifications (continued)

Specifications are for 1-hour warm-up at an integration time of 100 PLCs.

DC Voltage Characteristics:

Measurement method:	Continuously integrating, multi-slope III A/D converter
A/D linearity:	0.0002% of reading + 0.0001% of range
2/4-wire Ω:	100 M Ω
Input resistance:	0.1 V, 1 V, 10 V ranges: Selectable 10 M Ω or 10 G Ω 100 V, 300 V ranges: 10 M Ω $\pm$ 1%
Input bias current:	<30 pA at 25°C
Input terminals:	Copper alloy
Input protection:	300 V on all ranges

Resistance:

Measurement method:	Selectable 4-wire or 2-wire Ω (Current source referenced to low input)
Max. lead resistance:	(4-wire Ω) 10% of range per lead for dc Current 100 Ω and 1 k Ω per lead on all other ranges
Input protection:	300 V on all ranges
Shunt resistor:	0.1 Ω for 1 A and 3 A, 5 Ω for 10 mA and 100 mA
Input protection:	Externally accessible 3 A, 250 V fuse

Measurement Noise Rejection:

60 Hz (50 Hz) (For 1 k Ω unbalance in LO lead.)

DC CMMR:	140 dB
Integration Time	Normal mode rejection¹
100 PLC/1.67s (2s)	60 dB ²
10 PLC/167 ms (200 ms)	60 dB ²
1 PLC/16.7 ms (20 ms)	60 dB ²
<1 PLC/3 ms (800 μ s)	0 dB

¹ For power-line frequency $\pm$ 0.1%.

² For power-line frequency $\pm$ 1%, subtract 20 dB; for $\pm$ 3%, subtract 30 dB.

System Speed:

(Speeds are for 4.5 digits, Delay 0 and Autozero OFF. Includes measurement and data transfer over VXI backplane.)

Function change:	30/s
Range change:	65/s
Autorange time:	<30 ms
Max. internal trigger rate:	1000/s
Max. external trigger rate to memory:	1000/s

DC Specifications (continued)

Specifications are for 1-hour warm-up at an integration time of 100 PLCs.

DC:DC Ratio:

Measurement method: Input HI-LO/Reference HI-LO
Apply "Reference HI-LO" signal to Ohms 4-Wire Sense terminals.

Input HI to Input LO: 100 mV to 300 V

Reference HI to Input LO: <12 V on 100 mV to 10 V ranges (autoranged)

Reference LO to Input LO: <2 V

Additional Error with Autozero OFF:

Following instrument warm-up at calibration temperature $\pm 1^{\circ}\text{C}$ and <10 minutes.

100 mV-100 V ranges: add 0.0002% reading + 5 μV

300 V range: add 0.0006% reading

DC Operating Characteristics: Readings speeds for 60 Hz and (50 Hz) operation, Autozero OFF.

Function	NPLC	Digits	Reading/s	Additional Noise Error
DCV, DCI and Ω	100	6.5	0.6 (0.5)	0% of range
DCV, DCI and Ω	10	6.5	6 (5)	0% of range
DCV, DCI and Ω	1	5.5	60 (50)	0.001% of range*
DCV, DCI and Ω	0.2	5.5	300	0.001% of range*
DCV, DCI and Ω	0.02	4.5	1,000	0.01% of range*

*For 300 V range: use 0.003% of range for 5.5 digits and 0.030% of range for 4.5 digits.

For all ranges: add 20 μV for dc Volts, 4 μA for dc current, or 20 m Ω for resistance.

Considerations

Settling considerations: Reading settling times are affected by source impedance, cable dielectric characteristics, and input signal changes.

Measurement considerations: Agilent recommends the use of Teflon or other high impedance, low-dielectric absorption wire insulation for these measurements.

AC Specifications

AC Summary

AC voltage: 300 V max.

Voltage accuracy (ac): $\pm 0.07\%$

AC Accuracy $\pm$ (% of reading + % of range): Specifications for 1-hour warm-up at 6.5 digits. Slow ac filter, sinewave input.

True RMS AC Voltage³:

Range ²	Frequency	24 Hour ¹ 23°C $\pm$ 1°C	90 Day 23°C $\pm$ 5°C	1 Year 23°C $\pm$ 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
100.0000 mV	3 Hz-5 Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
100.0000 mV	5 Hz-10 Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004
100.0000 mV	10 Hz-20 kHz	0.04 + 0.03	0.05 + 0.04	0.06 + 0.04	0.005 + 0.004
100.0000 mV	20 kHz-50 kHz	0.10 + 0.05	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
100.0000 mV	50 kHz-100 kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
100.0000 mV	100 kHz-300 kHz	5.00 + 0.50	5.00 + 0.50	5.00 + 0.50	0.020 + 0.020
1.000000 V to 300.000 V ⁴	3 Hz-5 Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
1.000000 V to 300.000 V ⁴	5 Hz-10 Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
1.000000 V to 300.000 V ⁴	10 Hz-20 kHz	0.04 + 0.02	0.05 + 0.03	0.06 + 0.03	0.005 + 0.003
1.000000 V to 300.000 V ⁴	20 kHz-50 kHz	0.10 + 0.04	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
1.000000 V to 300.000 V ⁴	50 kHz-100 kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
1.000000 V to 300.000 V ⁴	100 kHz-300 kHz ⁵	5.00 + 0.50	5.00 + 0.50	5.00 + 0.50	0.200 + 0.020

True RMS AC Current³:

Range	Frequency	24 Hour 23°C $\pm$ 1°C	90 Day 23°C $\pm$ 5°C	1 Year 23°C $\pm$ 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
1.000000 A	3 Hz-5 Hz	1.05 + 0.04	1.05 + 0.04	1.05 + 0.04	0.100 + 0.006
1.000000 A	5 Hz-10 Hz	0.35 + 0.04	0.35 + 0.04	0.35 + 0.04	0.035 + 0.006
1.000000 A	10 Hz-1 kHz	0.15 + 0.04	0.15 + 0.04	0.15 + 0.04	0.015 + 0.006
1.000000 A	1 kHz-50 kHz	0.40 + 0.04	0.40 + 0.04	0.40 + 0.04	0.015 + 0.006
3.000000 A	3 Hz-5 Hz	1.70 + 0.06	1.70 + 0.06	1.70 + 0.06	0.100 + 0.006
3.000000 A	5 Hz-10 Hz	0.95 + 0.06	0.95 + 0.06	0.95 + 0.06	0.035 + 0.006
3.000000 A	10 Hz-1 kHz	0.75 + 0.06	0.75 + 0.06	0.75 + 0.06	0.015 + 0.006
3.000000 A	1 kHz-50 kHz	1.00 + 0.06	1.00 + 0.06	1.00 + 0.06	0.15 + 0.06

¹ Relative to calibration standards.

² 20% overrange on all ranges, except 300 Vac and 3 A ranges which have 1% overrange.

³ 100 mV to 100 V range specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range and <50 kHz, add 0.1% of range additional error. For 50 kHz to 100 kHz, add 0.13% additional error. 300 V range specifications are for sinewave input >15% of range. For inputs from 3% to 15% of range and >50 kHz, add 0.30% of kHz, add 0.40% of range additional error.

⁴ For 300 V range, use (% reading) shown in table and multiply each (% range) $\times$ 3.

⁵ 300 Vac range limited to 50 kHz. For frequencies >50 kHz, signals must be $\leq 1.5 \times 10^7$ VHz.

AC Specifications (continued)

Additional AC Specifications

Low Frequency Errors (% of reading)				Crest Factor Errors (non-sinewave)*	
Frequency	AC Filter Slow	Medium	Fast	Crest Factor	Error (% of reading)
10 Hz-20 Hz	0	0.74	-	1-2	0.05%
20 Hz-40 Hz	0	0.22	-	2-3	0.15%
40 Hz-100 Hz	0	0.06	0.73	3-4	0.30%
100 Hz-200 Hz	0	0.01	0.22	4-5	0.40%
200 Hz-1 kHz	0	0	0.18		
>1 kHz	0	0	0		

*For frequencies below 100 Hz, slow ac filter specified for sinewave input only.

Noise Rejection: (For 1 k Ω unbalance in LO lead.)

AC CMMR: 70 dB

True RMS AC Voltage:

Measurement method: AC-coupled True RMS — measures the ac component of the input with up to 300 Vdc of bias on any range. (Max ac+dc = 300 V rms.)

Crest factor: Maximum 5:1 at full scale

AC filter bandwidth: Slow: 3 Hz-300 kHz
Medium: 20 Hz-300 kHz
Fast: 200 Hz-300 kHz

Input impedance: 1 M Ω $\pm$ 2%, in parallel with 100 pF

Input protection: 300 Vrms all ranges

True RMS AC Current:

Measurement method: Direct couple to the fuse and shunt. ac -coupled True RMS measurement (measures the ac component only).

Shunt resistor: 0.1 Ω for 1 A and 3 A ranges

Burden voltage: 1 A range: <1 Vrms
3 A range: <2 Vrms

Input protection: Externally accessible 3 A, 250 V fuse

AC Specifications (continued)

AC Operating Characteristics:

Maximum reading rates 0.01% of ac step additional error. Additional settling delay required when input dc level varies.

Function	Digits	Reading/s	AC Filter
ACV and ACI	6.5	7 s/reading	Slow
ACV and ACI	6.5	1	Medium
ACV and ACI	6.5	1.6 ¹	Fast
ACV and ACI	6.5	10	Fast
ACV and ACI	6.5	50 ²	Fast

¹ For External Trigger or remote operation using default settling delay (Delay Auto).

² Maximum useful limit with default settling delays used.

Systems Speeds:

Maximum useful limit with default settling delays used; Speeds are for 4.5 digits, Delay 0, and Fast ac filter.

Function or range change:	5/s
Autorange time:	<0.8 s
ASCII reading to GPIB:	50/s
Max. internal trigger rate:	50/s
Max. external trigger rate to memory:	50/s

Additional Low-Frequency Errors (% of reading):

Input >100 mV. For mV input, multiply % of reading error x 10.

Frequency	6.5 digits	5.5 digits	4.5 digits
3 Hz-5 Hz	0	0.12	0.12
5 Hz-10 Hz	0	0.17	0.17
10 Hz-40 Hz	0	0.2	0.2
40 Hz-100 Hz	0	0.06	0.21
100 Hz-300 Hz	0	0.03	0.21
300 Hz-1 kHz	0	0.01	0.07
>1 kHz	0	0	0.02

Frequency and Period Specifications

Frequency and Period Accuracy (% of reading):

Specifications are for 1-hour warm-up at 6.5 digits.

Function	Range ²	Frequency	24 Hour ¹	90 Day	1 Year	Temperature Coefficient 0°C - 18°C 28°C - 55°C
			23°C ± 1°C	23°C ± 5°C	23°C ± 5°C	
Frequency, Period	100 mV to 300 V	3 Hz-5 Hz	0.10	0.10	0.10	0.005
Frequency, Period	100 mV to 300 V	5 Hz-10 Hz	0.05	0.05	0.06	0.005
Frequency, Period	100 mV to 300 V	10 Hz-40 Hz	0.03	0.03	0.03	0.001
Frequency, Period	100 mV to 300 V	40 Hz-300 kHz	0.006	0.01	0.01	0.001

¹ Relative to calibration standards.

² 20% overrange on all ranges, except 300 Vac range which has 1% overrange.

Measuring Characteristics:

Measurement method:	Reciprocal-counting technique. AC-coupled input using the ac voltage measurement function.
Voltage ranges:	100 mV rms full scale to 300 V rms. Auto or manual ranges.
Gate time:	10 ms, 100 ms, or 1 s
Settling considerations:	Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. The input blocking RC time constant must be allowed to fully settle (up to 1 s) before the most accurate measurements are possible.
Measurement considerations:	All frequency counters are susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors.
Max. reading rate:	1 K

Frequency and Period Specifications (continued)

Operating Characteristics:

Speeds are for 4.5 digits, Delay 0, and Fast ac filter.

Function	Digits	Reading/s
Frequency, Period	6.5	1
Frequency, Period	5.5	9.8
Frequency, Period	4.5	80

Systems Speeds:

Configuration rates:	14/s
Autorange time:	<0.6 s
Max. internal trigger rate:	80/s
Max. external trigger rate to memory:	80/s

Characteristics:

Warmup time:	1 hour
State storage memory:	Power-off state automatically saved

Functions:

Idc:	3 A
Iac:	3 A
Frequency:	300 kHz
Period:	3.3 μ s

General Specifications

VXI Characteristics:

VXI device type:	Message based
Data transfer bus:	A16
Size:	C
Slots:	1
Connectors:	P1/2
Shared memory:	n/a
VXI buses:	n/a

Instrument Drivers:

See the Agilent Technologies Website
http://www.agilent.com/find/inst_drivers
 for driver availability and downloading.

Command module firmware:	n/a
Command module firmware rev:	n/a
I-SCPI Win 3.1:	n/a
I-SCPI Series 700:	n/a
C-SCPI LynxOS:	n/a
C-SCPI Series 700:	n/a
Panel Drivers:	No
VXIplug&play Win Framework:	Yes
VXIplug&play Win95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Module Current:

	I_{PM}	I_{DM}
+5 V:	0.2	0.1
+12 V:	0.7	0.06
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

Cooling Slot:

Watts/slot:	9.40
ΔP mm H₂O:	0.05
Air Flow liter/s:	0.80

Ordering Information

Description	Product No.
6.5-Digit Multimeter, High Accuracy	E1412A
ANSI Z540 Compliant Calibration	E1412A A6J
3 year return to Agilent to 1 year OnSite warranty	E1412A W01



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.



www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	0820 87 44 11
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 € fixed network rates
Germany	01805 24 6333**
	**0.14 €/minute
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland (French)	41 (21) 8113811(Opt 2)
Switzerland (German)	0800 80 53 53 (Opt 1)
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: October 24, 2007

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2008
Printed in USA, January 31, 2008
5965-5563E



Agilent Technologies