


Ohmite radio frequency plate chokes have a single-layer winding designed to avoid adverse harmonic effects and prevents breakdown from high r.f. potentials. Windings are insulated and protected by a moisture-proof coating.

- Z-7 type furnished with non-magnetic mounting bracket.
- Z-14, Z-28 type have wire leads welded to lug type terminals.
- Z-50, Z-144, Z-235, Z-460 type have axial wire leads.

It is generally advisable to select a choke with a resonant frequency (see chart) slightly higher than the desired operating frequency since any additional capacity to ground will tend to shift the resonant frequency closer to the operating frequency.

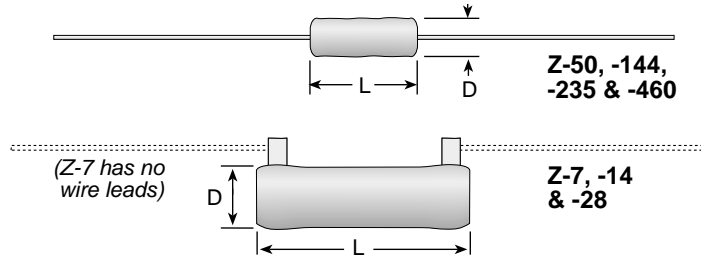

# Z Series

## R. F. Plate Chokes

### STOCK PART NUMBERS

Part number	Inductance (μH) ±10% @ 1kHz	Rated DC current (A)	DCR (Ω)	Operating range (MHz)	SRF (MHz)	Diameter (in./mm)	Length (in./mm)
Z-7	84.0	1.00	4.70	3 – 20	13	0.563 / 14.29	6 / 152.4
Z-14	44.0	0.68	2.60	7 – 35	23	0.438 / 11.11	2 / 50.6
Z-28	21.0	0.60	2.70	20 – 60	41	0.313 / 7.94	1.750 / 44.45
Z-50	7.0	1.00	0.98	35 – 110	79	0.281 / 7.14	1 / 25.4
Z-144	1.8	1.10	0.33	80 – 200	168	0.188 / 4.76	0.750 / 19.05
Z-235	0.84	1.70	0.14	160 – 350	300	0.188 / 4.76	0.750 / 19.05
Z-460	0.20	4.00	0.034	320 – 520	500	0.156 / 3.97	0.500 / 12.70