


TYPICAL PERFORMANCE

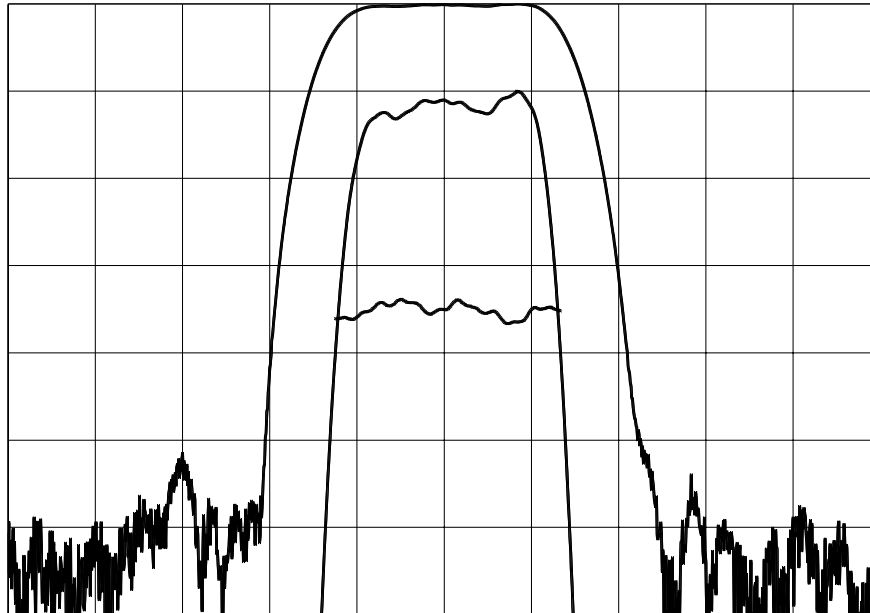

Horizontal: 1.0 MHz/div Vertical (from top):
 Magnitude 10 dB/div
 Magnitude 1 dB/div
 Phase 5 deg/div

SPECIFICATION


Parameter	Min.	Typ.	Max.	Units.
Center Frequency (Fc) ¹	69.92	70.0	70.08	MHz
Insertion Loss at Fc		23	25	dB
1 dB Bandwidth	2.1	2.2		MHz
3 dB Bandwidth	2.5	2.6		MHz
40 dB Bandwidth		4.1	4.4	MHz
Passband Ripple		0.3	0.7	dB
Phase Ripple		2	4	deg p-p
Group Delay Ripple		45	100	ns p-p
Absolute Delay		2.3		us
Ultimate Rejection	50	55		dB
Substrate Material	Quartz			
Ambient Temperature		25		deg C

Notes:

1: Mean Value of 3 dB points

Micro Networks

PACKAGE OUTLINE

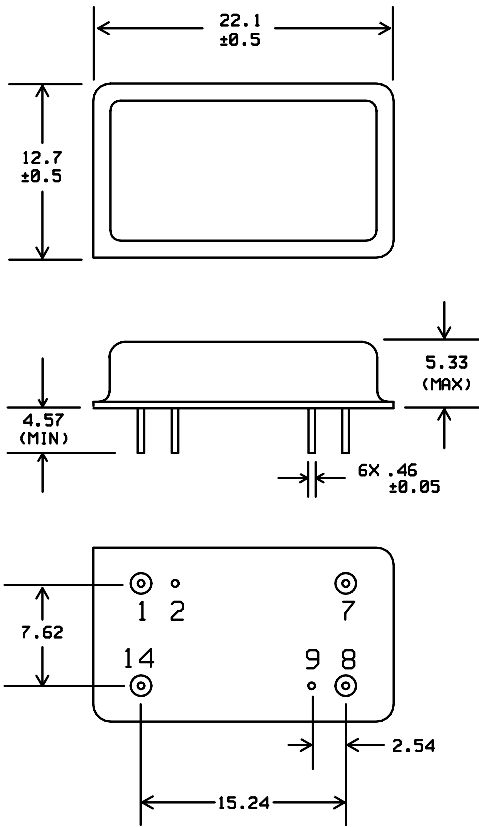


Units: mm

Pin Configuration:

Input:	14
Input Return:	1
Output:	8
Output Return:	7
Ground:	2, 9

MATCHING CIRCUIT

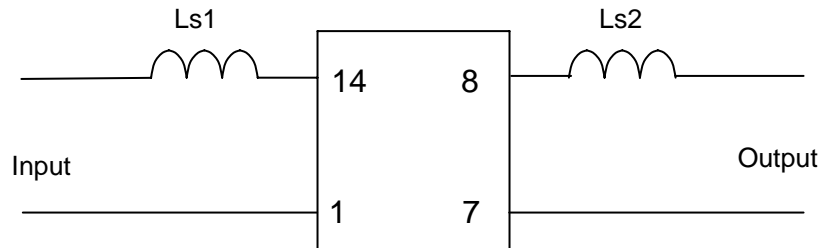

Predicted Component values into 50Ω matching (for guidance only) :

$Ls1 = 510$ nH (Minimum Q = 45)
 $Ls2 = 560$ nH

Notes

1. Recommend use of 2% tolerance components.
2. Component values may vary depending board layout.

ISO 9001
Registered