
Features

- 64-bit, 133 MHz PCI-X Bus
- Automatic-DMA Engine
 - ATA/ATAPI Host Adapters Standard Compliant
 - Native Command Queuing Model
 - Continuous DMA
 - Non-queued and Queued Mode
 - 32 Native Queued Commands
 - 2 ATA Channels, Total 4 ATA/ATAPI Devices
 - 64-bit Physical Address in CPB/APRD Chain and Data Buffers
 - Bus Master to/from Memory Space or I/O Space
 - Options for FPDMA HBA Support
- Host Serial ATA Interface
 - Native Command Queuing DMA Mechanism
 - 48-bit LBA for Hard Drives Larger than 137 GB
 - 4 Ports, Each Connects One Serial ATA Device
 - BIST Function
 - FPDMA Process Function
- Available in a Variety of Packages Depending on Customer Requirements

Description

The AT78C5051 is a 4-port serial ATA II host controller that provides a 64-bit PCI-X bus interface with an automatic DMA engine.

The PCI-X to Serial ATA ADMA Host Bus Adapter is a single-chip solution for a PCI-X to serial ATA controller. It accepts host transaction requests through the PCI-X bus, processes them and transmits them to one of four serial ATA devices. The AT78C5051 supports serial ATA speeds of 1.5/3.0 Gbits/s of 8/10bit-encoded data that is equivalent to 150/300 Mbytes/s of raw data. The AT78C5051 derives its serial ATA clocks from an external source with a reference clock of 75/150 MHz. On the 64-bit PCI-X bus, when run at the maximum frequency of 133 MHz, it supports a maximum burst transfer rate of 1064 Mbytes/s. It embeds four ADMA process engines, two in each ATA channel. The ADMA mechanism drastically increases the performance of systems that use ATA devices. Its major benefit is CPU overhead reduction. The device ADMA engine offloads the host processor by automating the process of sending command requests/retrieving responses for each of the requests and queued responses. The ADMA both reduces the host processor overhead and substantially increases the number of commands that can be loaded into the queue in the device.

The AT78C5051 may be used to build stand-alone PCI-X HBA cards to interface Serial ATA Disk Drives, Serial ATA/ATAPI CD-ROM/DVD ROM or Tape drives. The AT78C5051 is completely software compatible with all existing operating systems which support ATA interfaces: Windows[®], Windows NT[®], Linux, Solaris[™], Unix[®], etc. In PC systems, the AT78C5051 may also be configured to provide basic or additional storage capacity to systems. In non-PC systems, the AT78C5051 may be used as a generic storage controller in servers, RAID subsystems and Network Attached Storage (NAS) systems. The ease-of-use, flexibility, performance and low cost of the AT78C5051 make it an ideal choice for all of these applications.



PCI-X to Serial ATA II Host Controller with ADMA Engine

AT78C5051


Summary

3437AS-NETST-2/04



Note: This is a summary document. A complete document is available under NDA. For more information, please contact your local Atmel sales office.

Figure 1. AT78C5051 Block Diagram

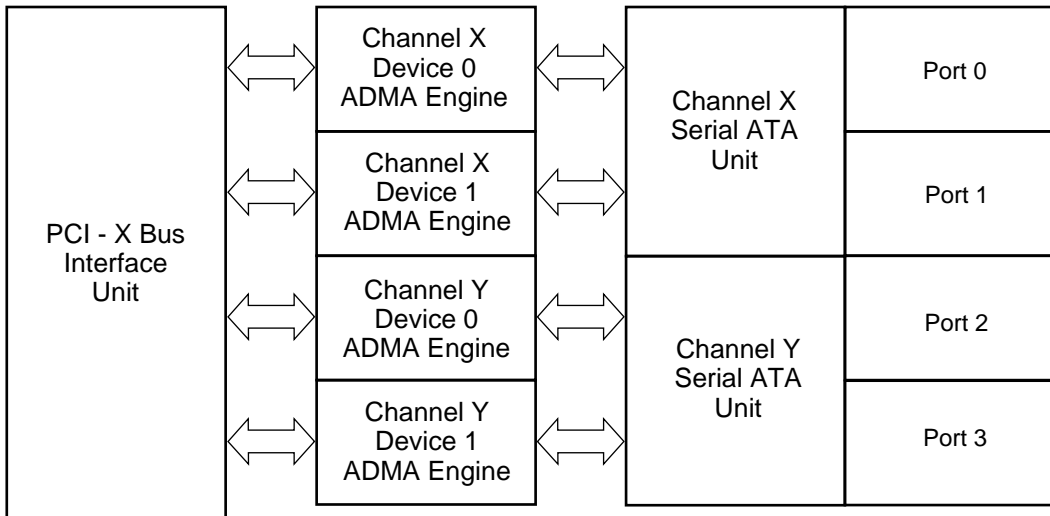



Atmel Corporation

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl
Route des Arsenaux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
Tel: (41) 26-426-5555
Fax: (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimshatsui
East Kowloon
Hong Kong
Tel: (852) 2721-9778
Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
Tel: (81) 3-3523-3551
Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
Tel: (33) 2-40-18-18-18
Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
13106 Rousset Cedex, France
Tel: (33) 4-42-53-60-00
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
Tel: (44) 1355-803-000
Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
Tel: (49) 71-31-67-0
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
Tel: (33) 4-76-58-30-00
Fax: (33) 4-76-58-34-80

Literature Requests

www.atmel.com/literature

Disclaimer: Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© **Atmel Corporation 2004. All rights reserved.** Atmel® and combinations thereof, are the registered trademarks of Atmel Corporation or its subsidiaries. Windows® and Windows NT® are the registered trademarks of Microsoft Corp. Solaris™ is the registered trademarks of Sun Microsystems Corp. Unix® is the registered trademarks of X/Open Company Limited. Other terms and product names may be the trademarks of others.



Printed on recycled paper.

3437AS-NETST-2/04