### **Features:**

- High speed response.
- High reliability and long life.
- Low power consumption.
- Available in red,blue,white ,green, yellow colors.
- Suitable for pulse operation.



w.DataSheet4U.com

## **Descriptions:**

- The LED lamps are available with different colors, intensities, epoxy colors, etc.
- The series specially designed for applications requiring higher brightness.
- Superior performance in outdoor environment.

## **Applications:**


- These lamp are widely used for various application.
- Board for display.
- Indication of all kinds.
- Traffic Signal.

### **Selection Guide:**

Part No.		Long Type		
rart No.	Material	Emitting Color	Lens Type	
LUE50333	AlGaInP	High Super Red	Water Clear	
LUY50333	AlGaInP	High Super Yellow		
LAG50333	AlGaInP	High Super Green	water Clear	
LAM50333	AlGaInP	High Super Amber		

Prepared date: June 2005 http://www.wenrun.com Rev.: 3 Page 1of 5

# **Package Dimensions:**

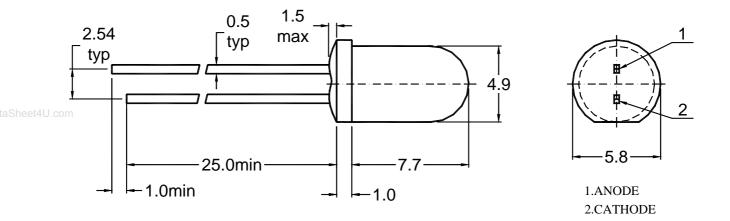

### **NOTES:**

- 1、 All dimensions are in millimetres (mm).
- 2. Tolerance is  $\pm 0.25$ mm(0.01") unless otherwise noted.
- 3、Protruded resin under flange is 1.5mm Max LED.

# Absolute Maximum Rating (Ta=25)

D	Symbol						
Parameter		Red	Yellow	Green	Amber	Unit	
Power Dissipation	$P_d$	70	70	70	70	mW	
Pulse Forward Current	Ţ	80	80	80	80	mA	
(Duty 1/10 @ 1kHz)	$I_{FP}$						
Continuous Forward Current	$I_{\mathrm{F}}$	25	25	25	25	mA	
Reverse Voltage	$V_R$	5	5	5	5	V	
Operating Temperature Range	Topr						
Storage Temperature Range	Tstg						
Soldering Temperature	Tsol						

**Notes:** Soldering time 5 seconds.

L 503

# Electrical Optical Characteristics (Ta=25)

	Symbol	High Super								T4	
Parameter		Red		Yellow		Green		Amber		Unit	Test Condition
		Тур.	Max.	Тур.	Max.	Тур.	Max.	Тур.	Max.		Condition
Luminous Intensity	$I_V$	4500		5000		1500		3000	1	mcd	I <sub>F</sub> =20mA
Forward Voltage	$V_{\mathrm{F}}$	2.0	2.5	2.0	2.5	2.0	2.5	2.0	2.5	V	I <sub>F</sub> =20mA
Reverse Current	$I_R$		50		50		50		50	uA	V <sub>R</sub> =5V
Dominant Wavelength	d	625		590		570		605		nm	I <sub>F</sub> =20mA
Peak Emission Wavelength	P	633		593		575		609	-1	nm	I <sub>F</sub> =20mA
Spectral Line Half Width		30		30		30		30		nm	I <sub>F</sub> =20mA
Viewing Angle	2 1/2	15		15		15		15		deg	I <sub>F</sub> =20mA


# **Reliability Test Items and Conditions**


NO	Test Item	Test Conditions	Duration	Sample	Ac/Re
1	Temperature Cycle	-40 ~ 25 ~ 100 ~ 25 30min 5min 30min 5min	50clycles	100	0/1
2	High Temp. Storage	Ta=100	1000hours	100	0/1
3	Temp.& Humidity Test	Ta=85 RH=85%	1000hours	100	0/1
4	Low Temp. Storage	Ta=-40	1000hours	100	0/1
5	Operating Life Test	Ta=25 ± 5 DC IF=20mA	1000hours	100	0/1
6	Solder Heat	Tsol= $260 \pm 5$ , 10s	1times	20	0/1


Prepared date: June 2005 http://www.wenrun.com Rev.: 3 Page 3of 5


503


# **Typical Electro-Optical Characteristics Curves:**













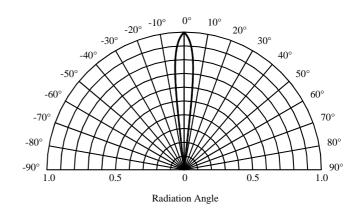

Prepared date: June 2005 http://www.wenrun.com Rev.: 3 Page 4of 5

503

### **Label Form Specification**

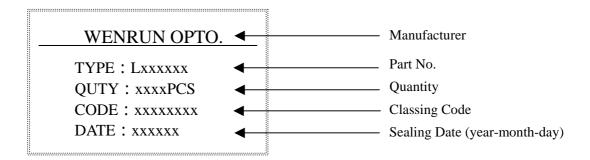

ww.DataShoot4LL.com

### **Precautions In Use**

### A, Soldering Conditions

- 1. When soldering, leave the minimum clearance between the bottom of the resin and the soldering point.
- 2, Maximum allowable soldering conditions are.

Solder dipping: 260 max., 5 seconds max., one time.

Soldering iron: 350 max., 5 seconds max., one time.

- 3. Contact between molten solder and the resin must be avoided.
- 4. In soldering, do not put any stress on the lead frame, particularly when heated.

#### B, Lead frame Forming and Use

- 1. When forming leads ,the leads should be bent at a point at least 3mm from the base of epoxy. Lead forming should be done before soldering.
- 2. Do not apply any bending stress to the base of the lead. The stress to the base may damage the LEDs characteristics.
- 3. When mounting the LEDs onto a printed circuit board ,the holes on the circuit board should be exactly aligned with the leads of the LEDs.
- 4. Please avoid conditions which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration may cause difficulty during soldering operations. It is recommended that the LEDs be used as soon as possible.
- 5. Please avoid rapid transitions in ambient temperature, especially, in high humidity environments.

### **Notes:**

- 1. Above specification may be changed without notice. We will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for the specification sheets. We assume no responsibility for any damage resulting from use of the product which does not comply with the instructions included in the specification sheets.

Prepared date: June 2005 http://www.wenrun.com Rev.: 3 Page 5of 5