

FEATURES

- dual channel signal processing
- 2nd (4th) order state variable filter
- adjustable crossover frequency
- adjustable compression ratio from 1:1 to 4:1
- independent compression ratio adjustment for low and high frequency band
- adjustable AGC threshold levels
- unique twin average detectors
- handles high input levels
- low THD and IMD distortion
- drives Class D Integrated Receivers
- MPO range externally adjustable

STANDARD PACKAGING

Hybrid Typical Dimensions

0.250 in x 0.115 in x 0.080 in)
(6.35 mm x 2.91 mm x 2.03 mm)

DEVICE DESCRIPTION

The DynamEQ® II hybrid family is a second generation Wide Dynamic Range Compression (WDRC) system.

GS3031 (GS3032) hybrid incorporates 12 dB/oct (24 dB/oct) filtering. All capacitors necessary for operation are included on the hybrid.


The gain and frequency response is dependant on the user's environment.

Twin Averaging Detector circuits are optimized for sound quality during normal listening without sacrificing comfort during sudden loud inputs.

All input signals to DynamEQ® II, are processed by 2:1 compression before subsequent band splitting.

The 12 dB/oct (24 dB/oct) band split filter ahead of the expander/compressor circuits allows for independent compression ratio adjustment (1:1 to 4:1) in high and low frequency channels.

The gain setting stage is followed by a class D Integrated Receiver preamplifier stage. Symmetrical peak clipping is used to achieve MPO adjustment.

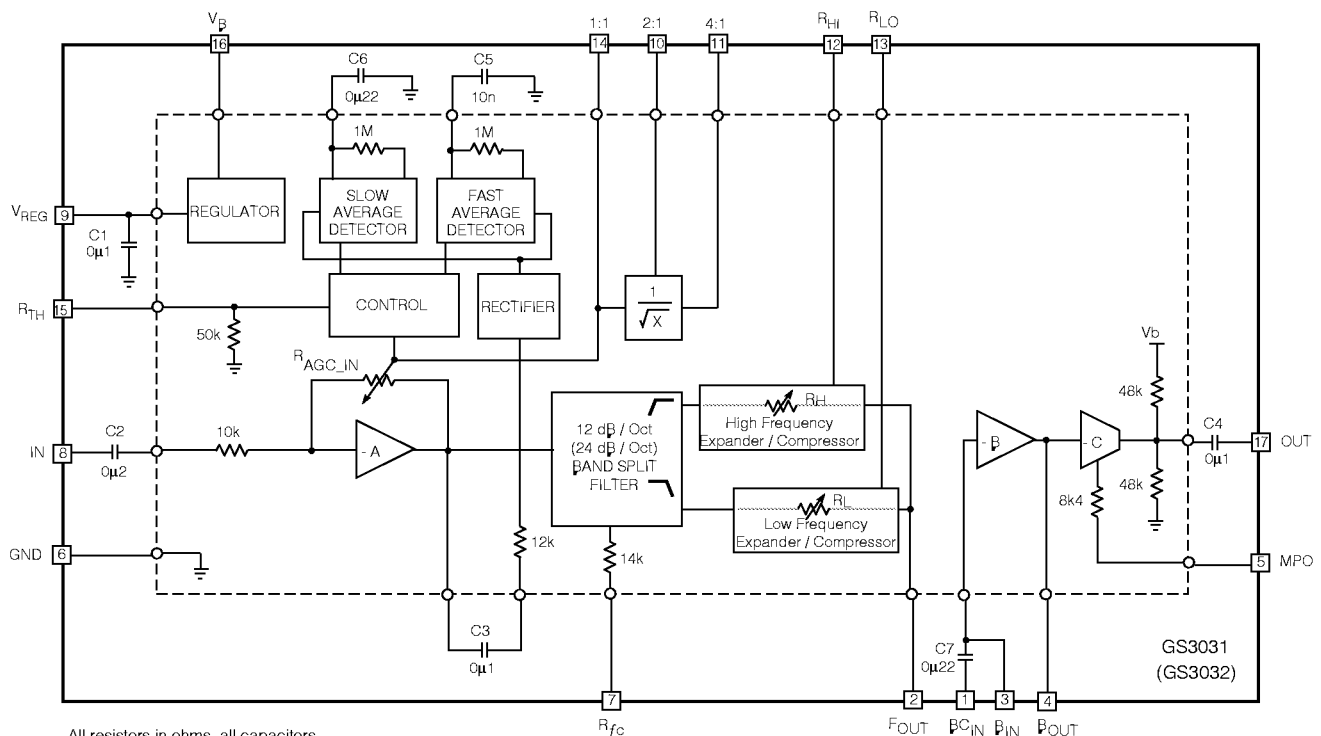

All resistors in ohms, all capacitors
in microfarads, unless otherwise stated
Patent Pending

FUNCTIONAL BLOCK DIAGRAM


ABSOLUTE MAXIMUM RATINGS

PARAMETER	VALUE / UNITS
Supply Voltage	3 VDC
Power Dissipation	25 mW
Operating Temperature Range	-10° C to 40° C
Storage Temperature Range	-20° C to 70° C

CAUTION
CLASS 1 ESD SENSITIVITY



PAD CONNECTION

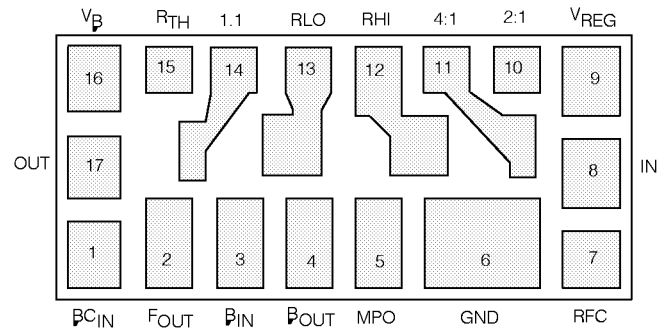

ELECTRICAL CHARACTERISTICS

Conditions: Supply Voltage $V_b = 1.3$ V, Frequency = 1 kHz, Temperature = 25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Hybrid Current	I_{AMP}		-	370	530	μA
Minimum Voltage	V_b		1.1	-	-	V
Total Harmonic Distortion	THD	$V_{IN} = -40dBV$ at 1kHz	-	0.2	1.0	%
THD with Maximum Allowable Input	THD _M	$V_{IN} = -23dBV$, $R_{vc} = 47k\Omega$	-	2	10	%
Input Referred Noise	IRN	Aweight	-	3.0	-	μV_{RMS}
Total System Gain	A_V	$V_{IN} = -90dBV$	46	49	52	dB
Regulator Voltage	V_{REG}	$I_{LOAD} = 30\mu A$	890	930	1000	mV
AGC						
Lower Threshold	TH _{LO}		-91	-87	-83	dBV
Upper Threshold	TH _{HI}		-36	-32	-28	dBV
Compression Gain Range	ΔA	Gain(-90dBV _{IN}) - Gain(-30dBV _{IN})	37.5	40.5	43.5	dB
System Gain in Compression	A_{60}	$V_{IN} = -60dBV$	26	29	32	dB
Min. Compression Ratio	CMP _{1:1}	$V_{IN} = 3kHz$, -60dBV to -40dBV, Rhp=1:1 Rlp=1:1	0.9	1.0	1.1	Ratio
Max. Comp. Ratio	CMP _{4:1}	$V_{IN} = 3kHz$, -60dBV to -40dBV, Rhp=4:1, Rlp=4:1	3.6	4.0	4.3	Ratio
Fast Detector Time Constant	τ_{FAST}		-	10	-	ms
Slow Detector Time Constant	τ_{SLOW}		-	220	-	ms
FILTER						
Maximum Cross-over Frequency	$f_{c,0}$	$R_{fc} = 0\Omega$	3.0	3.9	-	kHz
Nominal Cross-over Frequency	$f_{c,22}$	$R_{fc} = 22k\Omega$	1.5	1.9	2.3	kHz
Minimum Cross-over Frequency	$f_{c,220}$	$R_{fc} = 220k\Omega$	-	0.9	1.4	kHz
Filter Rolloff Rate (GS3027)			-	12	-	dB/oct
(GS3028)			-	24	-	dB/oct
STAGE A and B						
Open Loop Gain (B)	$A_{OL,B}$		-	52	-	dB
Input Impedance (A)	R_{IN}		9	11	13	k Ω
OUTPUT STAGE						
Stage Gain	A_C	$V_{IN} = -30dBV$	7	9	11	dB
Max Output Level	MPO	$R_{VC} = 220k\Omega$, $V_{IN} = -25dBV$	-14.5	-12.5	-10.5	dBV
MPO Range	ΔMPO	$R_{MPO} = 0\Omega$ to $50k\Omega$	13	15	17	dB
Output Resistance	R_{OUT}		-	24	-	k Ω

All conditions and parameters remain as shown in Test Circuit unless otherwise stated in "Conditions" column.

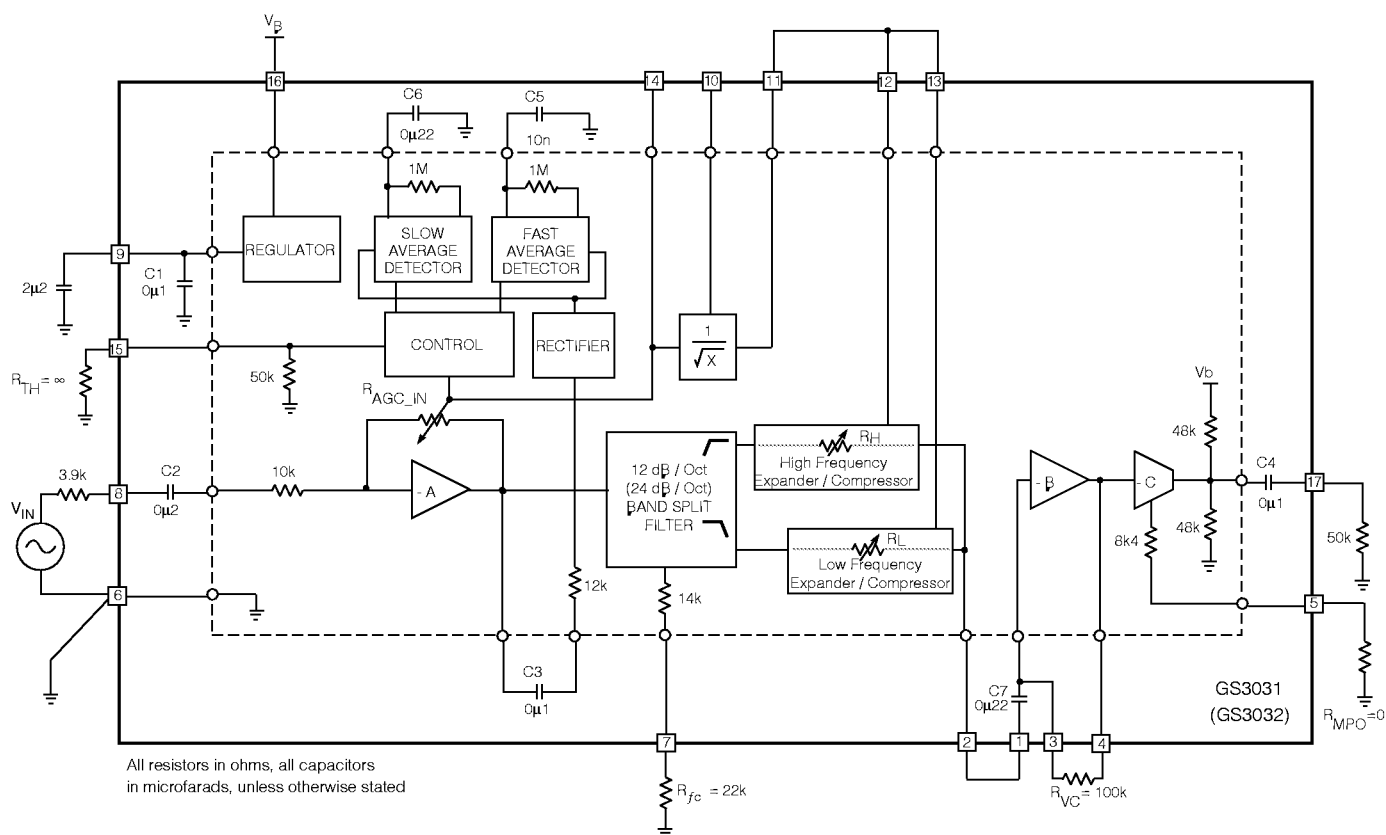


Fig. 1 Production Test Circuit

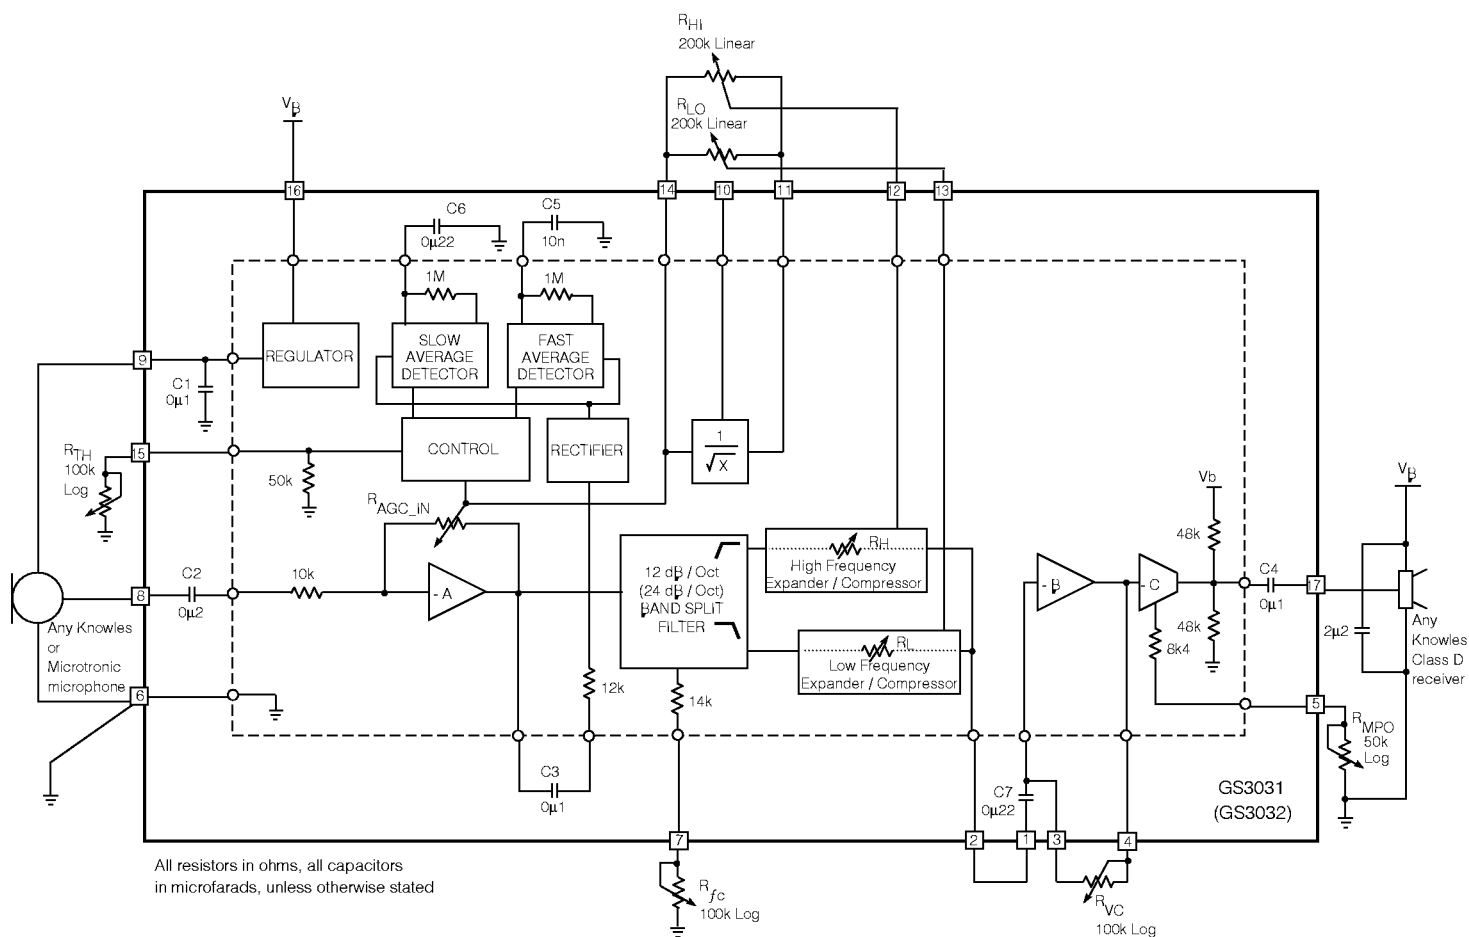


Fig. 2 Maximum Flexibility Hearing Instrument Application

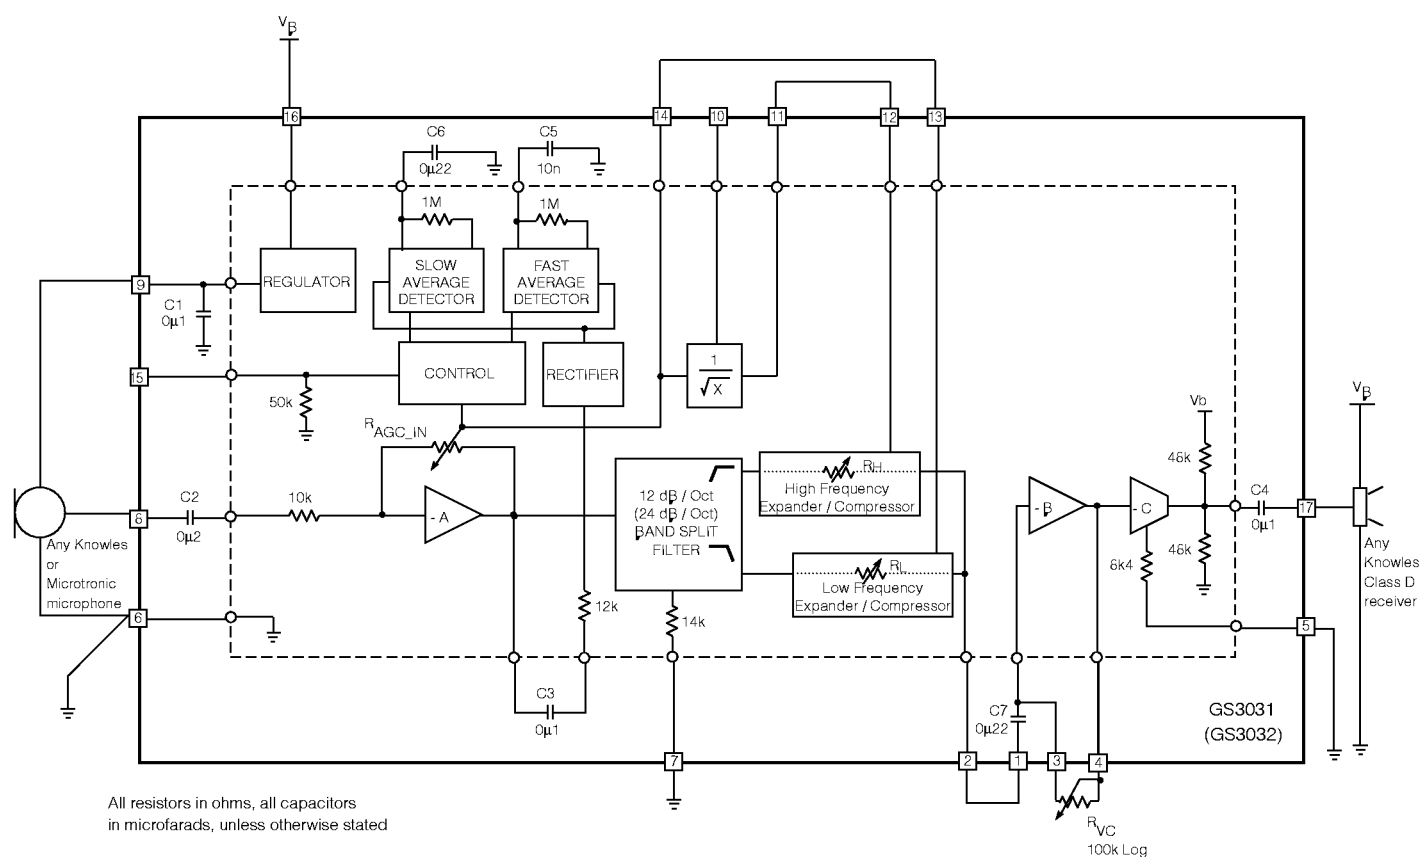


Fig. 3 Minimum Component Hearing Instrument Application

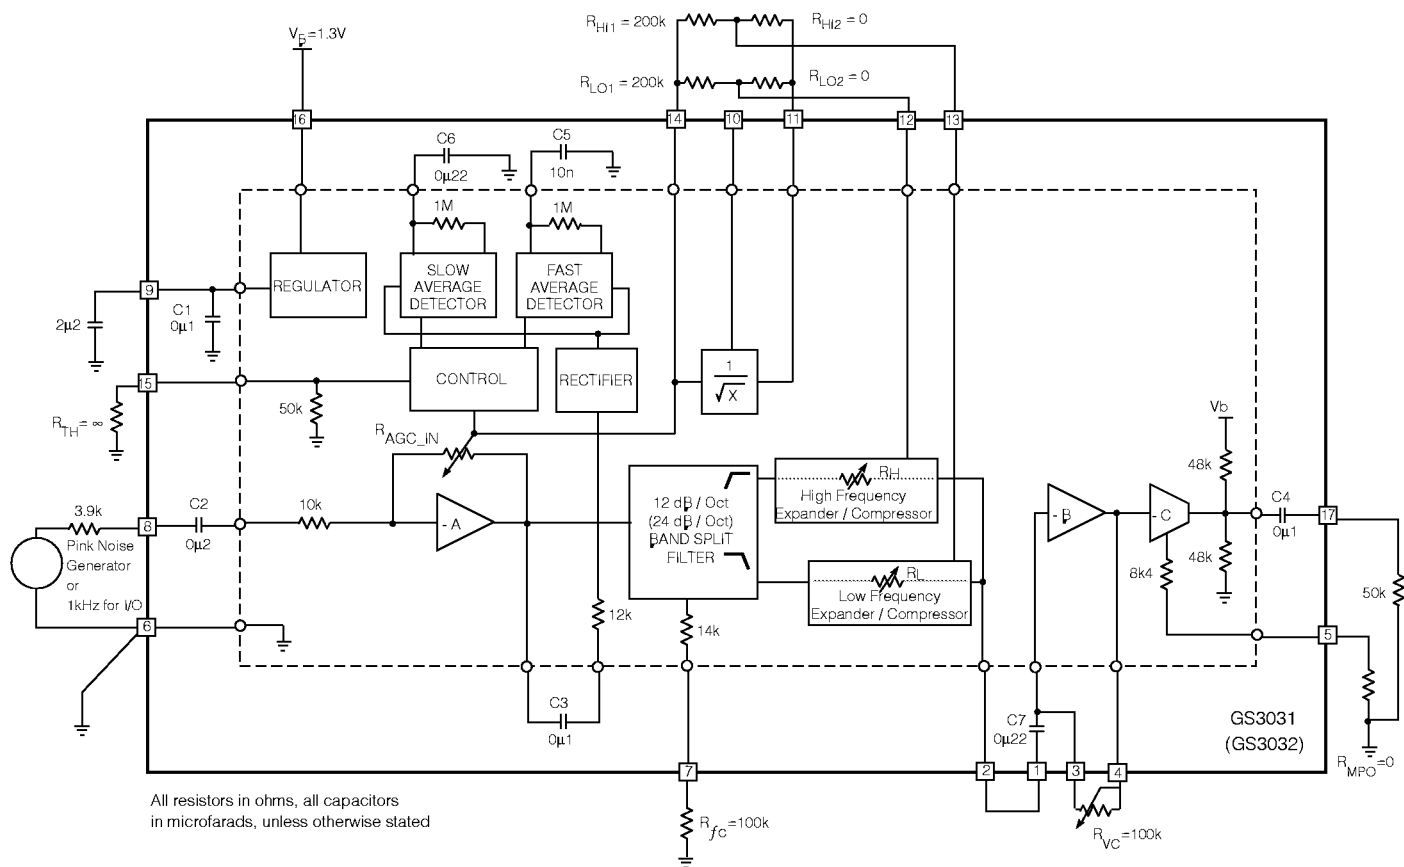


Fig. 4 Characterization Circuit (Used to generate typical curves)

TYPICAL PERFORMANCE CURVES

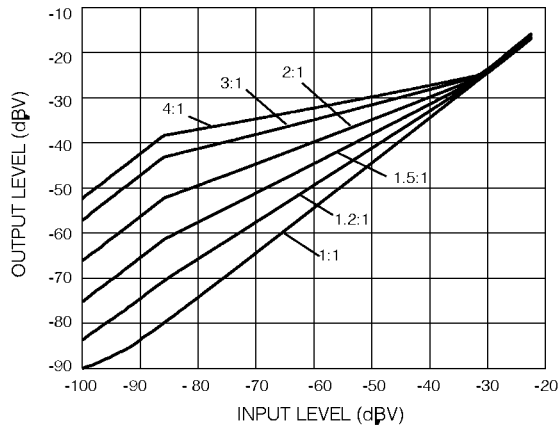


Fig. 5 I/O Transfer function for Different Compression Ratios

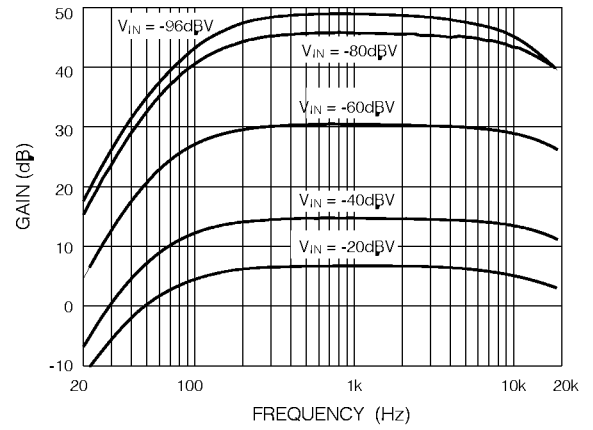


Fig. 6 Frequency Response for Different Input Levels

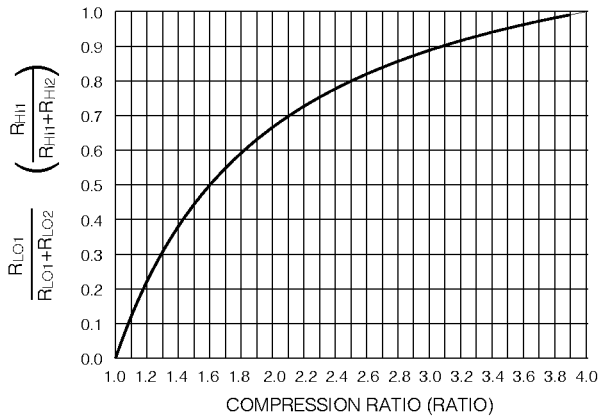


Fig. 7 Compression Settings Resistor Ratio for High Pass Channel (R_{H11} & R_{H12}) and Low Pass Channel (R_{L01} & R_{L02})

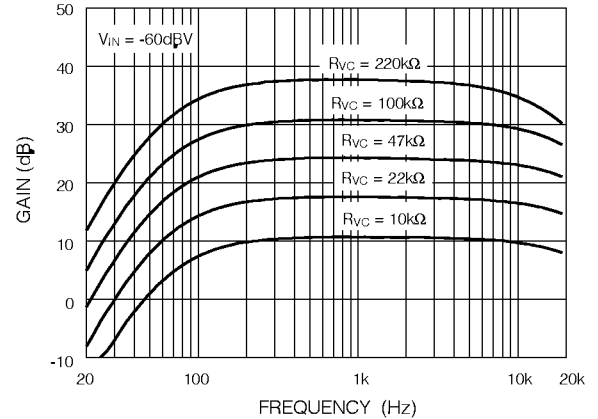


Fig. 8 Frequency Response for Different R_{VC} Values

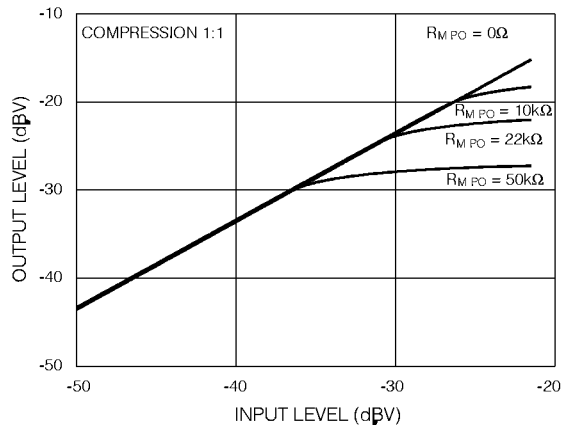


Fig. 9 I/O Transfer Function for Different R_{MPO} Resistors

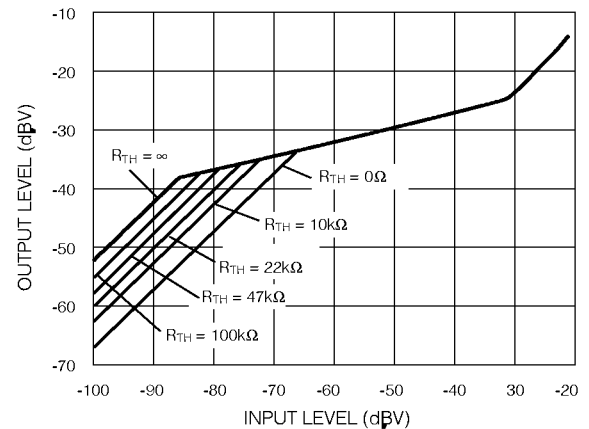
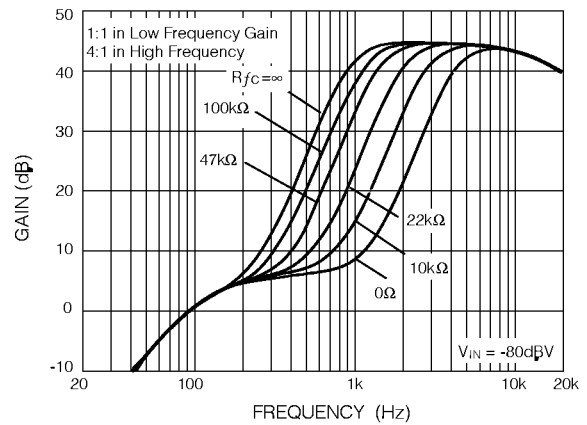
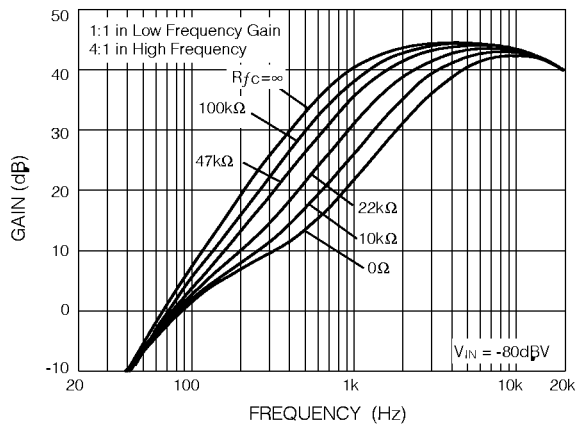
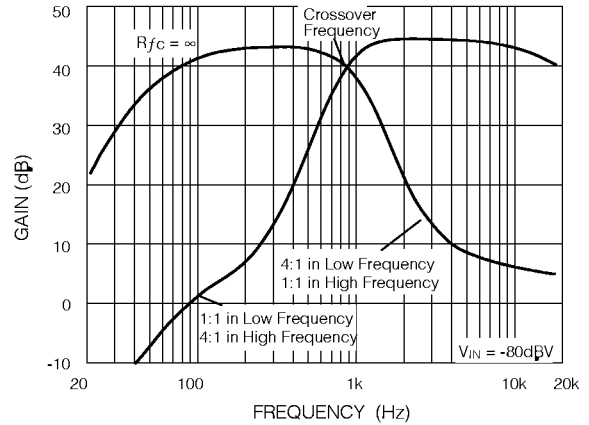
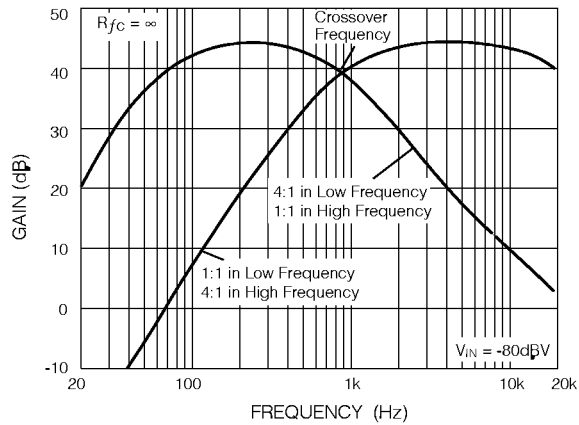
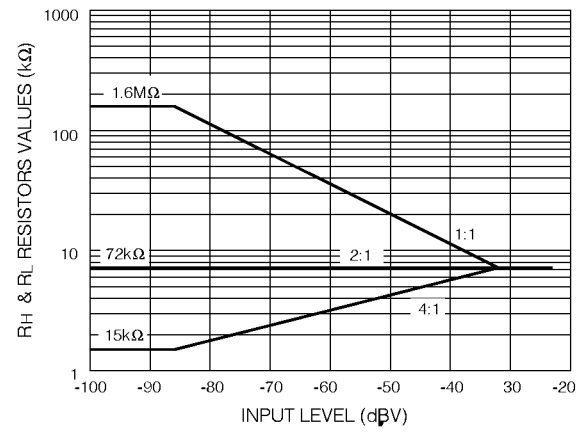
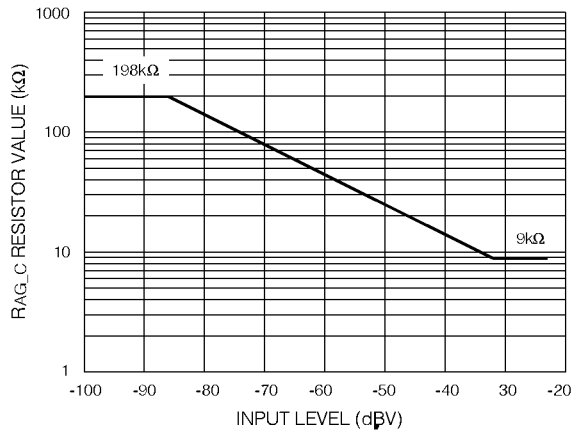


Fig. 10 I/O Transfer Function for Different R_{TH} Resistors



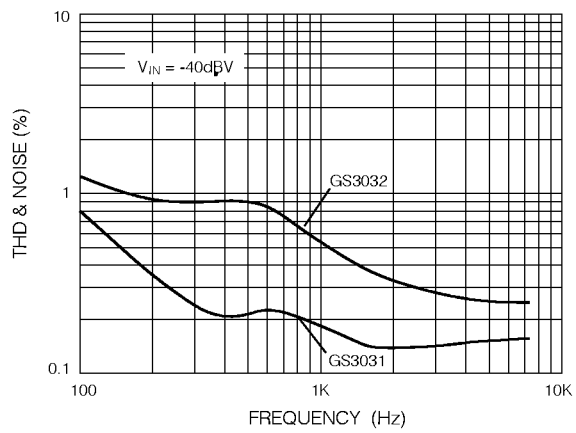


Fig. 17 THD and Noise vs Frequency

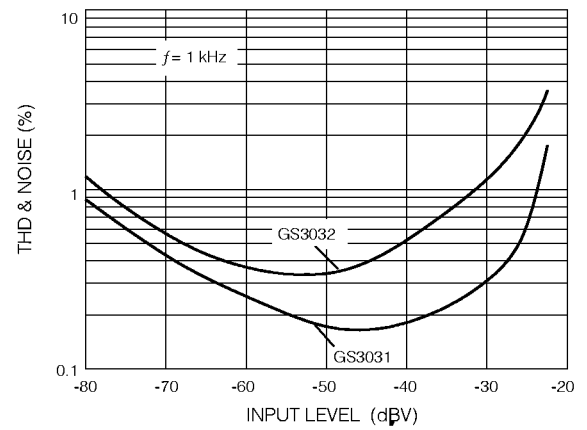


Fig. 18 THD and Noise vs Input Level

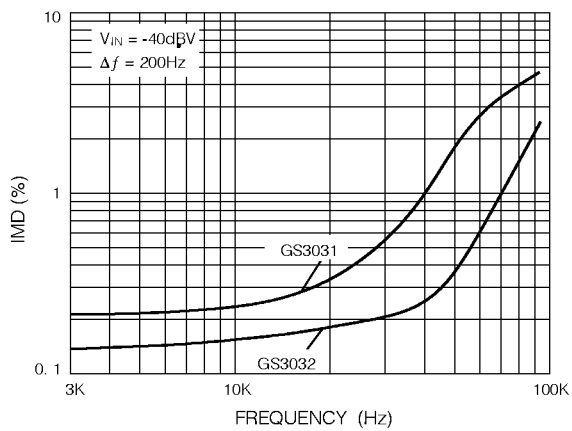


Fig. 19 Intermodulation Distortion (CCIF) vs Frequency


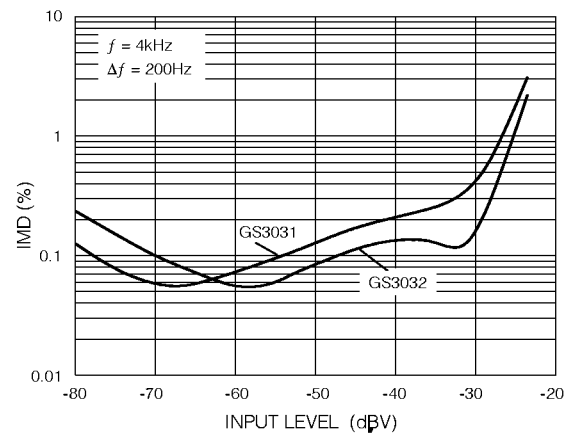


Fig. 20 Intermodulation Distortion (CCIF) vs Input Level

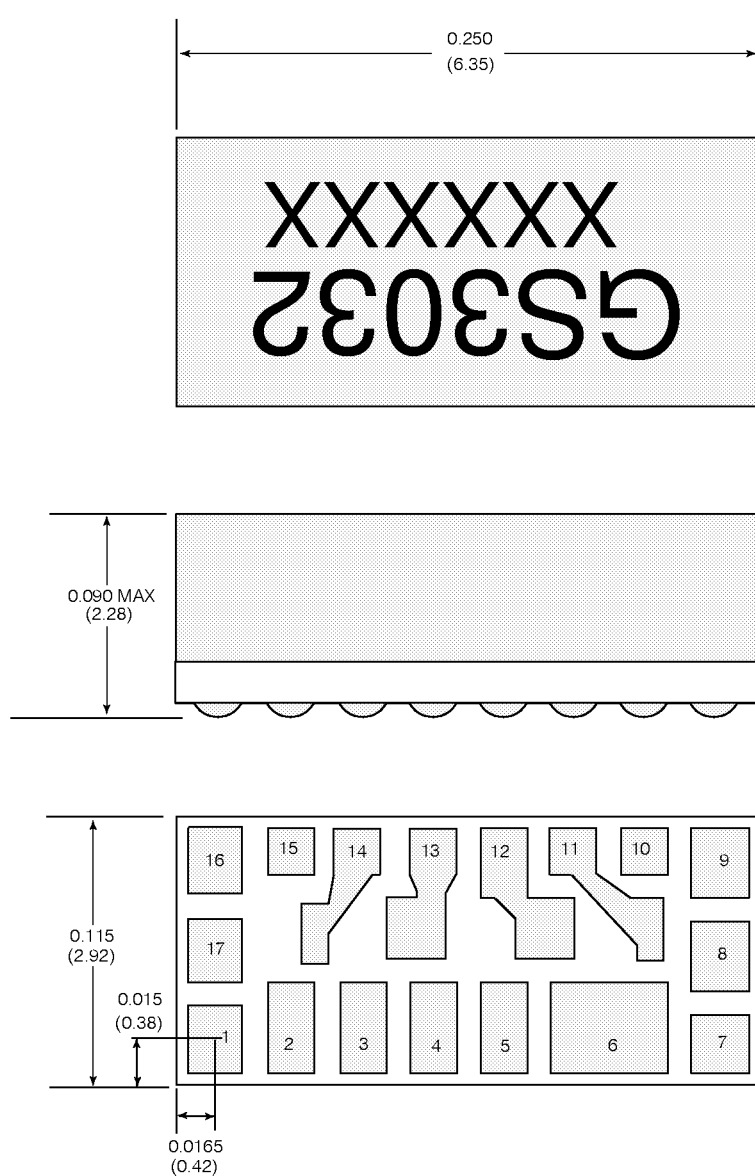

Dimension units are in inches.
Dimensions in parenthesis are in millimetres converted from inches and include minor rounding errors.
1.0000 inches = 25.400 mm.
Dimension ± 0.003 (± 0.08) unless otherwise stated.
XXXXXX - work order number.
Component name - either GS3031 or GS3032
This hybrid is designed for point to point soldering.
Contact Gennum Representative for pad layout in electronic format.

Fig. 21 Hybrid Layout & Dimensions

DOCUMENT IDENTIFICATION: DATA SHEET

The product is in production. Gennum reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.

REVISION NOTES:

Updated to Data sheet