

# HM63021 Series

2048-Word x 8-Bit Line Memory



■ DESCRIPTION

HM63021 is a 2048-word x 8-bit static Serial Access Memory (SAM) with separate data inputs and outputs. Since it has an internal address counter, no external address signal is required and internal addresses are scanned serially. Using five different address scan modes, it is applicable to FIFO memories, double-speed conversions, 1H delay lines and 1H/2H delay lines for digital TV signals. Its minimum cycle times are 28 ns and 34 ns each corresponding to 8 fsc of PAL TV signals and NTSC TV signals. All inputs and outputs are TTL-compatible. This device is packaged in a 300 mil dual-in-line plastic package.

■ FEATURES

- Five Modes for Various Applications
- Corresponds to Digital TV System with 4 fsc Sampling (PAL, NTSC)
- Decoder Signal Output Pin; Fewer External Circuits
- Asynchronous Read/Write Operation;  
    Separate Address Counter for Read/Write  
    No Address Input Required
- High Speed; Cycle Time ..... 28 ns/34 ns/45 ns (min)
- Completely Static Memory; No Refresh Required
- 8-bit SAM with Separate I/O
- Low Power ..... 250 mW typ. Active
- Single 5V Supply
- TTL Compatible

■ PIN OUT

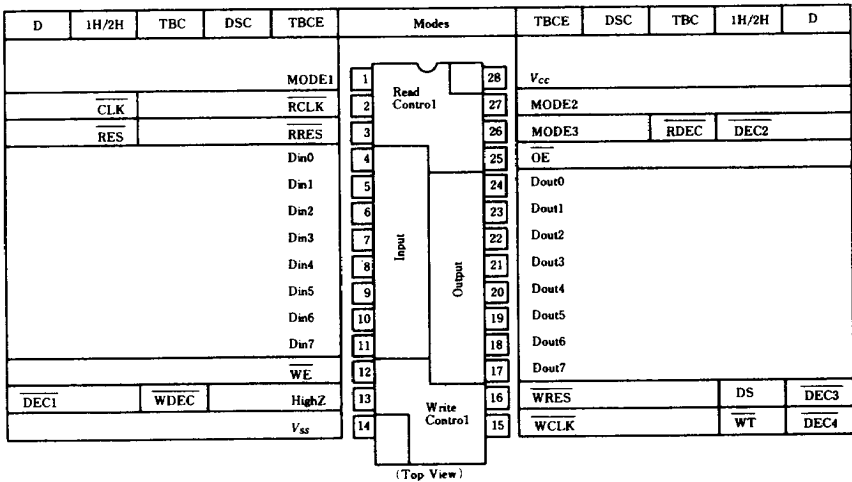

■ ORDERING INFORMATION

Part No.	Access Time	Package
HM63021P-28	28 ns	300 mil 28-pin
HM63021P-34	34 ns	Plastic DIP
HM63021P-45	45 ns	(DP-28N)



Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300

## ■ PIN DESCRIPTION

Pin No.	Pin Name	Function
1	MODE1	Mode Input 1 (All Modes)
1	RCLK/CLK	Read Clock Input (TBCE, DSC, TBC) Clock Input (1H/2H, D)
3	RRES/RES	Read Reset Input (TBCE, DSC, TBC) Reset Input (1H/2H, D)
4–11	D <sub>in0</sub> –D <sub>in7</sub>	Data Input (All Modes)
12	WE	Write Enable Input (All Modes)
13	High Z/WDEC/DEC1	High Impedance (TBCE, DSC) Write Decode Pulse Output (TBC) Decode Pulse Output 1 (1H/2H, D)
14	V <sub>SS</sub>	Ground (All Modes)
15	WCLK/WT/DEC4	Write Clock Input (TBCE, DSC, TBC) Write Timing Input (1H/2H) Decode Pulse Output 4 (D)
16	WRES/DS/DEC3	Write Reset Input (TBCE, DSC, TBC) Delay Select Input (1H/2H) Decode Pulse Output 3 (D)
17–24	D <sub>out0</sub> –D <sub>out7</sub>	Data Outputs (All Modes)
25	OE	Output Enable Input (All Modes)
26	MODE3/RDEC/DEC2	Mode Input 3 (TBCE) Read Decode Pulse Output (TBC) Decode Pulse Output 2 (1H/2H, D)
27	MODE2	Mode Input 2 (All Modes)
28	V <sub>CC</sub>	Power Supply ( + 5V) (All Modes)

## ■ MODE TABLE

Mode Signals			Mode	Application Example	Note
MODE1	MODE2	MODE3			
H	H	H	Time Base Compression/Expansion (TBCE)	Picture in Picture	
H	H	L	Double Speed Conversion (DSC)	Non Interface	
H	L	—	Time Base Correction (TBC)	Time Base Corrector	1
L	H	—	1H/2H Delay (1H/2H)	Vertical Filter	1
L	L	—	Delay Line (D)	Delay Line	1

Note: 1. Decoder Output Signal (RDEC, DEC2).

## ■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit	Notes
Voltage on Any Pin Relative to V <sub>SS</sub>	V <sub>T</sub>	– 0.5 to + 7.0	V	1
Power Dissipation	P <sub>T</sub>	1.0	W	
Operating Temperature	T <sub>opr</sub>	0 to + 70	°C	
Storage Temperature	T <sub>stg</sub>	– 55 to + 125	°C	
Storage Temperature Under Bias	T <sub>bias</sub>	– 10 to + 85	°C	

Note: 1. – 3.5V for pulse width ≤ 10 ns.





Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply Voltage	V <sub>CC</sub>	4.5	5.0	5.5	V	
	V <sub>SS</sub>	0	0	0	V	
Input Voltage	V <sub>IH</sub>	2.4	—	6.0	V	
	V <sub>IL</sub>	−0.5	—	0.8	V	1



949

• DC and Operating Characteristics ( $T_A = 0$  to  $+70^\circ\text{C}$ ,  $V_{CC} = 5\text{V} \pm 10\%$ ,  $V_{SS} = 0\text{V}$ )

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition	Note
Input Leakage Current	$ I_{LI} $	—	—	10	$\mu\text{A}$	$V_{CC} = 5.5\text{V}$ $V_{in} = V_{SS}$ to $V_{CC}$	
Output Leakage Current	$ I_{LO} $	—	—	10	$\mu\text{A}$	$\overline{\text{OE}} = V_{IH}$ $V_{out} = V_{SS}$ to $V_{CC}$	
Operating Power Supply Current	$I_{CC}$	—	50	90	mA	Min. Cycle, $I_{out} = 0\text{mA}$	1
Output Voltage	$V_{OL}$	—	—	0.4	V	$I_{OL} = 8\text{mA}$ , $D_{out0}$ to $D_{out7}$ DEC Output Pin	2
	$V_{OH}$	2.4	—	—	V	$I_{OH} = -4\text{mA}$ , $D_{out0}$ to $D_{out7}$ Pin	
		2.4	—	—	V	$I_{OH} = -1\text{mA}$ , $\overline{\text{DEC}}$ Output Pin	

Notes: 1. Typical values are at  $V_{CC} = 5\text{V}$ ,  $T_A = 25^\circ\text{C}$  and for reference only.  
2.  $I_{OL} = 6\text{mA}$  for 45 ns version.

• Capacitance ( $T_A = 25^\circ\text{C}$ ,  $f = 1.0\text{MHz}$ )

Parameter	Symbol	Min	Typ	Max	Unit	Conditions	Note
Input Capacitance	$C_{in}$	—	—	6	pF	$V_{in} = 0\text{V}$	
Output Capacitance	$C_{out}$	—	—	9	pF	$V_{out} = 0\text{V}$	2




Notes: 1. This parameter is sampled and not 100% tested.  
2. 13, 15–24, 26 pin.

• AC Characteristics ( $V_{CC} = 5\text{V} \pm 10\%$ ,  $T_A = 0$  to  $+70^\circ\text{C}$ , unless otherwise noted.)

AC Test Conditions




Input and Output Timing Reference Levels: 1.5V  
Input Pulse Levels:  $V_{SS}$  to 3V  
Input Rise and Fall Times: 5 ns

HM63021-28/34



Note: \*1. Including scope and jig.

HM63021-45



Note: \*1. Including scope and jig.



## Read Cycle

Parameter	Symbol	HM63021-28		HM63021-34		HM63021-45		Unit
		Min	Max	Min	Max	Min	Max	
Read Cycle Time	t <sub>RC</sub>	28	—	34	—	45	—	ns
Read Clock Width	t <sub>RWL</sub>	10	—	10	—	15	—	ns
	t <sub>RWH</sub>	10	—	10	—	15	—	ns
Access Time	t <sub>AC</sub>	—	20	—	25	—	30	ns
Decode Output Access Time	(Fall) t <sub>DA1</sub>	—	20	—	25	—	30	ns
	(Rise) t <sub>DA2</sub>	—	40	—	50	—	60	ns
Output Hold Time	t <sub>OH</sub>	5	—	5	—	5	—	ns
Decode Output Hold Time	(Fall) t <sub>DOH1</sub>	5	—	5	—	5	—	ns
	(Rise) t <sub>DOH2</sub>	5	—	5	—	5	—	ns
Output Enable Access Time	t <sub>OE</sub>	—	20	—	25	—	30	ns
Output Disable to Output in High Z	t <sub>OHZ</sub>	0	15	0	20	0	25	ns
Output Enable to Output in Low Z	t <sub>OLZ</sub>	5	—	5	—	5	—	ns

## Write Cycle

Parameter	Symbol	HM63021-28		HM63021-34		HM63021-45		Unit
		Min	Max	Min	Max	Min	Max	
Write Cycle Time	t <sub>WC</sub>	28	—	34	—	45	—	ns
	t <sub>WC</sub> (1H/2H Mode)	56	—	68	—	90	—	ns
Write Clock Width	t <sub>WWL</sub>	10	—	10	—	15	—	ns
	t <sub>WWH</sub>	10	—	10	—	15	—	ns
Input Data Setup Time	t <sub>DS</sub>	5	—	5	—	7	—	ns
Input Data Hold Time	t <sub>DH</sub>	5	—	5	—	7	—	ns
WE Setup Time	t <sub>WESL</sub>	5	—	5	—	7	—	ns
	t <sub>WESH</sub>	5	—	5	—	7	—	ns
WE Hold Time	t <sub>WEHL</sub>	5	—	5	—	7	—	ns
	t <sub>WEHH</sub>	5	—	5	—	7	—	ns
WT Setup Time	t <sub>WTSL</sub>	5	—	5	—	7	—	ns
	t <sub>WTSH</sub>	5	—	5	—	7	—	ns
WT Hold Time	t <sub>WTHL</sub>	5	—	5	—	7	—	ns
	t <sub>WTHH</sub>	5	—	5	—	7	—	ns

## Reset Cycle

Parameter	Symbol	HM63021-28		HM63021-34		HM63021-45		Unit
		Min	Max	Min	Max	Min	Max	
Reset Setup Time	t <sub>RES</sub>	8	—	9	—	10	—	ns
Reset Hold Time	t <sub>REH</sub>	5	—	5	—	7	—	ns
Clock Setup Time Before Reset	t <sub>REPS</sub>	8	—	9	—	10	—	ns
Clock Hold Time Before Reset	t <sub>REPH</sub>	5	—	5	—	7	—	ns



## Mode Description

## • Time Base Compression/Expansion Mode

This mode turns HM63021 into a 2048-word x 8-bit FIFO memory with asynchronous input/output. The HM63021 provides 2 clocks ( $\overline{\text{RCLK}}$ ,  $\overline{\text{WCLK}}$ ) and 2 resets ( $\overline{\text{RRES}}$ ,  $\overline{\text{WRES}}$ ), one each for read and write. The internal address counters increment by 1 address clock and are reset to address 0. A write-inhibit function of HM63021 stops writing automatically after the data has been written into all addresses 0 to 2047. The write-inhibit function is released by reset using  $\overline{\text{WRES}}$ , and the HM63021 restarts writing into address 0.

## • Double-Speed Conversion Mode

This mode turns HM63021 into a 1024-word x 8-bit x 2 memory with asynchronous input/output. It is used for generating non-interlaced TV signals. When the original signal and the interpolated signal (1 field delay) of interlaced signals are input to the HM63021, multiplexed per dot, it outputs non-interlaced signals for each line. 8 fsc should be input to  $\overline{\text{RCLK}}$  and  $\overline{\text{WCLK}}$ . A standard H synchronizing signal and a non-interlace H synchronizing signal are input to  $\overline{\text{WRES}}$  and  $\overline{\text{RRES}}$  respectively. A write-inhibit function is provided in this mode, making it applicable to PAL TV, where extra data (1135–1024 = 111 bits) is ignored.

## • TBC Mode

This mode turns HM63021 into 2048-word x 8-bit FIFO memory with asynchronous input/output. The HM63021 provides 2 clocks ( $\overline{\text{RCLK}}$ ,  $\overline{\text{WCLK}}$ ) and 2 resets ( $\overline{\text{RRES}}$ ,  $\overline{\text{WRES}}$ ), one each for read and write. The internal address counters increment by 1 address at each clock and are reset to address 0. The internal address counters return to address 0 after they reach address 2047. The HM63021 outputs a write decode pulse from  $\overline{\text{WDEC}}$ , synchronizing it with address 2047 in the write address counter, and read a decode pulse from  $\overline{\text{RDEC}}$ , synchronizing

with address 2047 in the read address counter. Using these pulses, the memory area can be extended easily (multiple-HM63021s can be used with ease).

## • 1H/2H Delay Mode

This mode turns HM63021 into a 1024-word x 8-bit x 2 delay line with synchronous input/output. Delay time is defined by the reset period of  $\overline{\text{RES}}$ . Since the HM63021 outputs a 901 decode pulse ( $\overline{\text{DEC1}}$ ) and a 910 decode pulse ( $\overline{\text{DEC2}}$ ), connecting  $\overline{\text{DEC2}}$  to  $\overline{\text{RES}}$ , for example, outputs 1H- and 2H- delayed signals alternately at a 8- fsc cycle when the original signal is input at a 4- fsc cycle. A write-inhibit function is provided in this mode, making it applicable to PAL TV, where extra data (1135–1024 = 111 bits) is ignored.


## • Delay Line Mode

This mode turns HM63021 into a 2048-word x 8-bit delay line with synchronous input/output. Delay time (3 to 2048 bits) is defined by the reset period of  $\overline{\text{RES}}$ . The delay is 2048 bits when  $\overline{\text{RES}}$  is fixed High. Signals delayed by 910 bits to 1135 bits for example, can be easily obtained without external circuits by just connecting selected decoded pulses on  $\overline{\text{DEC1}}$ – $\overline{\text{DEC4}}$  to  $\overline{\text{RES}}$ .


## Notes on Using HM63021

- Hitachi recommends that pin 13 (high impedance) should be fixed by pulling up or down with a resistor (of several k $\Omega$ ) in TBC or DSC mode.
- Hitachi recommends that the mode signal input pins and DS pin should be fixed by pulling them up or down with a resistor (of several k $\Omega$ ).
- Data integrity cannot be guaranteed when mode is changed during operation.
- When a read address coincides with a write address in TBCE, TBC or DSC mode, the data is written correctly but it is not always read correctly.

## (1) Read after Write (3 bits delay)

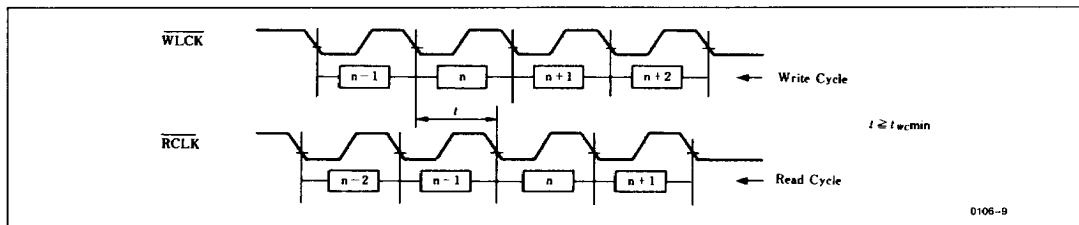


## (2) Write after Read (2048 bits delay)

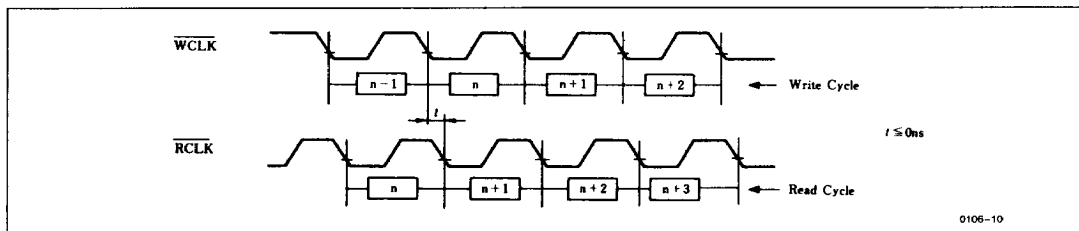

- At power on, the output of the address counter is not defined. Therefore, operations before the system is reset cannot be guaranteed, and decode signal output is not defined until after the first reset cycle.
- The decode signal is latched by a decode output latch circuit at the previous address of the internal counter address and is output synchronized with the next address. For example,  $\overline{WDEC}$  in TBC mode is latched at write address 2046 and is output at write address 2047. If a write reset is performed on address 2047 at this time, the write address becomes 0 and  $\overline{WDEC}$  is output.

The same operation is performed in other modes.


- In the reset cycle, the input levels of  $\overline{WRES}$ ,  $\overline{RRES}$ ,  $\overline{RES}$  are raised to satisfy  $t_{REH}$ , and are fixed high until  $t_{REPH}$  in the next pre-reset cycle is satisfied. The rise timings of the reset signals ( $\overline{RES}$ ,  $\overline{WRES}$ ,  $\overline{RRES}$ ) are optional provided that the  $t_{REPS}$  specification is satisfied. The timings at which  $\overline{RES}$ ,  $\overline{WRES}$ , and  $\overline{RRES}$  fall after preset are also optional, provided that the  $t_{REPH}$  and  $t_{RES}$  specifications are satisfied.

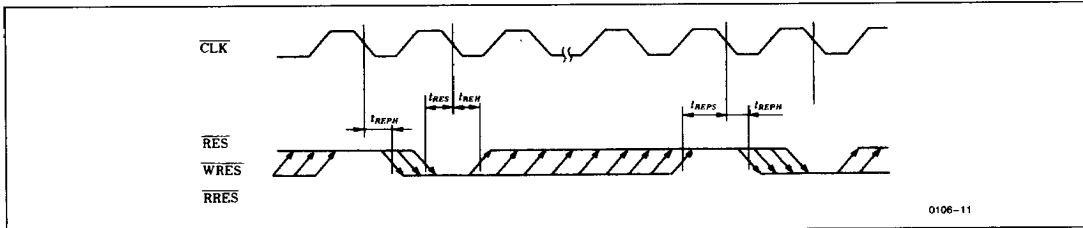


- Hitachi recommends that  $t_m$  (time between mode set and the first cycle (Pre-reset)) should be kept for 2 cycle

time (56 ns/68 ns/90 ns) or more while the power supply is on.

#### (1) TBCE, TBC, DSC and Delay Line Mode

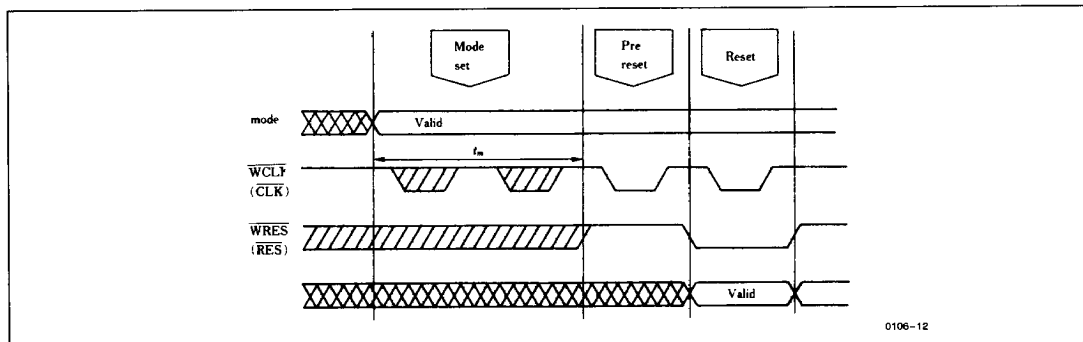

(2) 1H/2H Delay Mode

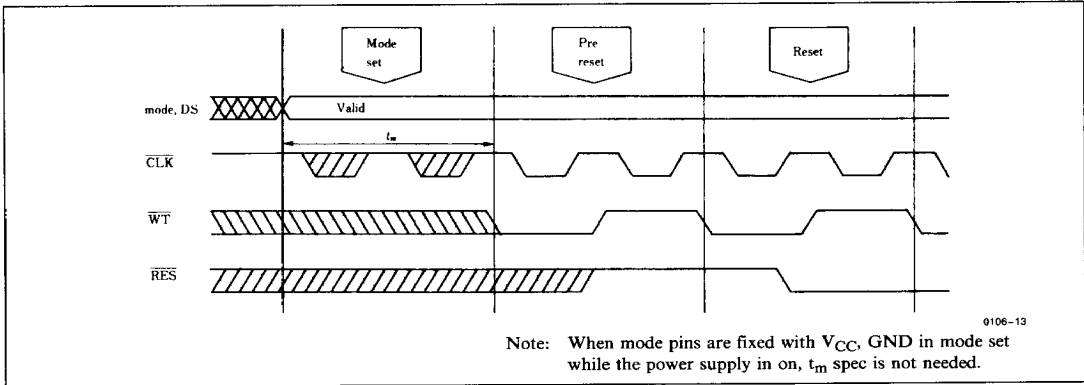

Decode Signal

When internal address counter reaches the specified address as shown below, decode outputs become low.

Mode	Pin No.	Pin Name	Internal Address Counter	Timing of the Output Signal	Operation
TBC	13	$\overline{WDEC}$	Write 2047	After Write 2047	Completion of Writing on all bits is detected.
	26	$\overline{RDEC}$	Read 2047	Output of 2046	Completion of Reading from all bits is detected.
1H/2H	13	$\overline{DEC1}$	Read 900 (2H)	Output of 900 (1H)	By inputting this signal to pin # 3, 901/1802-bit delay output is obtained.
	26	$\overline{DEC2}$	Read 909 (2H)	Output of 909 (1H)	By inputting this signal to pin # 3, 910/1820-bit delay output is obtained.
Delay Line	13	$\overline{DEC1}$	Read 900	Output of 899	By inputting this signal to pin # 3, 901-bit delay output is obtained.
			Read 1810	Output of 1809	By inputting this signal to pin # 3 after the frequency of $\overline{DEC1}$ is divided into two, 1811-bit delay output is obtained.
	26	$\overline{DEC2}$	Read 909	Output of 908	By inputting this signal to pin # 3, 910-bit delay output is obtained.
			Read 1819	Output 1818	By inputting this signal to pin # 3 after the frequency of $\overline{DEC2}$ is divided into two, 1820-bit delay output is obtained.
	16	$\overline{DEC3}$	Read 1134	Output 1133	By inputting this signal to pin # 3, 1135-bit delay output is obtained.
	15	$\overline{DEC4}$	Read 1125	Output 1124	By inputting this signal to pin # 3, 1126-bit delay output is obtained.

Note: 1. When counter is reset by Reset Signal ( $\overline{RRES}$ ,  $\overline{RES}$ ,  $\overline{WRES}$ ), address becomes 0.

Write-Inhibit Function

When internal address counter is as follows, writing is inhibited automatically for the next cycle. the write-inhibit function is cancelled by reset through  $\overline{WRES}$  or  $\overline{RES}$ .


Mode	Write-Inhibit Function (Internal Counter Address)
TBCE	Write-inhibit after address 2047
DSC	Write-inhibit after address 1023 x 2
TBC	No function
1H/2H	Write-inhibit after address 1023
D	No function

Note: When address counter is reset by  $\overline{WRES}$  or  $\overline{RES}$ , address becomes 0.





## Read Reset Cycle (TBCE, TBC Modes)

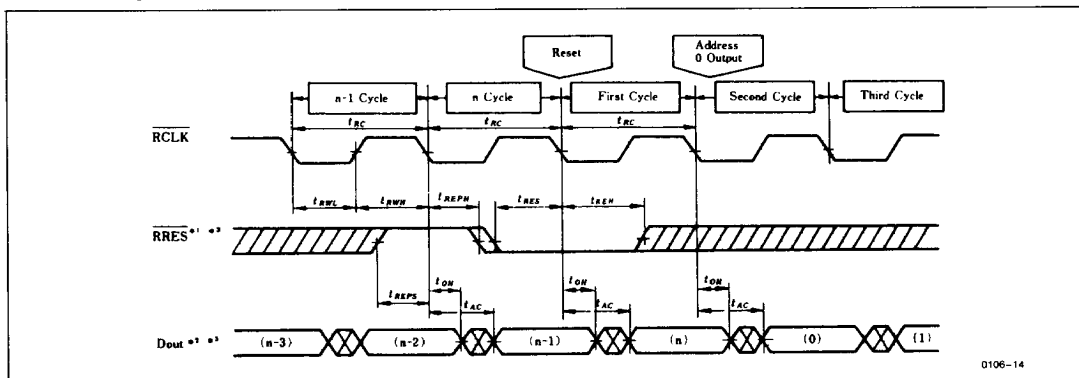


Notes: \*1. The read address counter is reset at the first falling edge of  $\overline{RCLK}$  after  $\overline{RRES}$  falls, meeting the specifications of  $t_{RPS}$  and  $t_{RPH}$ , and it is not reset at the next falling edge of  $\overline{RCLK}$  even if  $\overline{RRES}$  is kept low.

When  $t_{RES}$ ,  $t_{REN}$ ,  $t_{RPS}$ , and  $t_{RPH}$  cannot meet the specifications, the reset operation is not guaranteed.

\*2. Output is from the read address of the previous cycle.

\*3. When  $\overline{RRES}$  is fixed high, the data at the read address counter is reset after the data of address 2047 is output, and the same operation restarts.

## Write Reset Cycle (TBCE, TBC Modes)

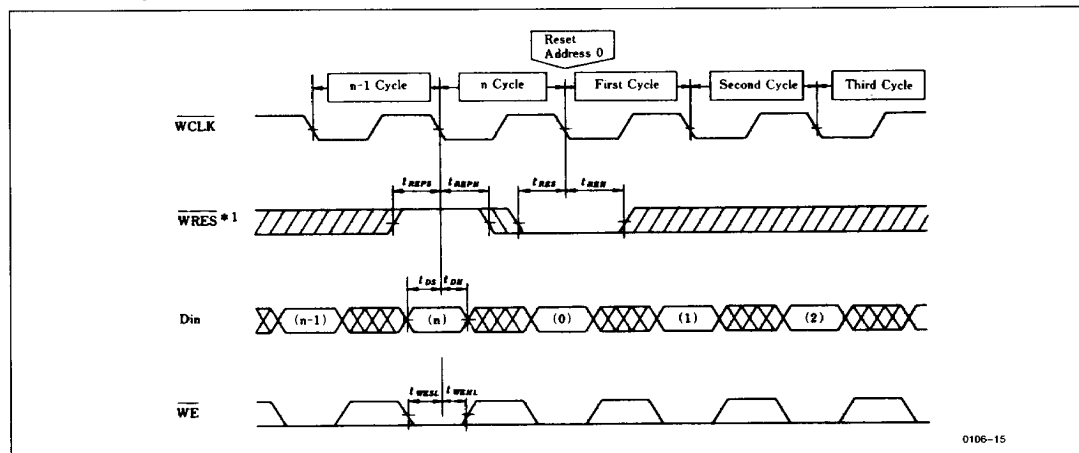


Note: The write address counter is reset at the first falling edge of  $\overline{WCLK}$  after  $\overline{WRES}$  falls, meeting the specifications of  $t_{WPS}$  and  $t_{WPH}$ , and it is not reset at the next falling edge of  $\overline{WCLK}$  even if  $\overline{WRES}$  is kept low.

When  $t_{WRS}$ ,  $t_{WRPH}$ ,  $t_{WPS}$ , and  $t_{WPH}$  cannot meet the specifications, the reset operation is not guaranteed.



## Reset Cycle (DSC Modes)

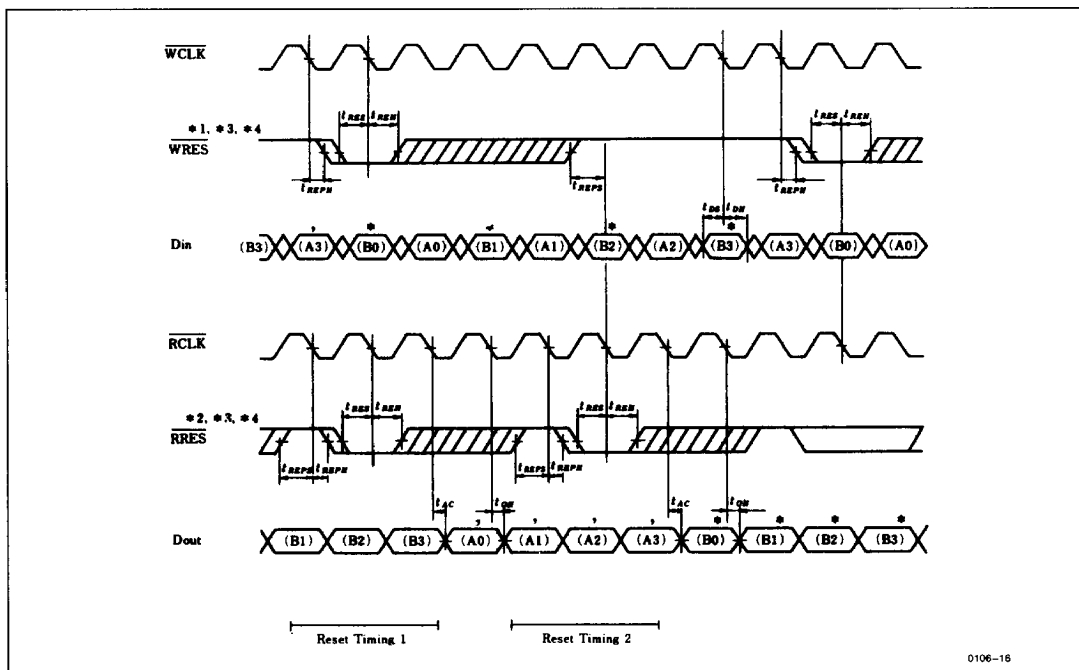


0106-16

- Notes:
- \*1. The write address counter is reset at the first falling edge of  $\overline{WCLK}$  after  $\overline{WRES}$  falls, meeting the specifications of  $t_{REPS}$  and  $t_{REPH}$ , and it is not reset at the next falling edge of  $\overline{WCLK}$  even if  $\overline{WRES}$  is kept low.  
When  $t_{RES}$ ,  $t_{REH}$ ,  $t_{REPS}$ , and  $t_{REPH}$  cannot meet the specifications, the reset operation is not guaranteed.
  - \*2. The read address counter is reset at the first falling edge of  $\overline{RCLK}$  after  $\overline{RRES}$  falls, meeting the specifications of  $t_{REPS}$  and  $t_{REPH}$ , and it is not reset at the next falling edge of  $\overline{RCLK}$  even if  $\overline{RRES}$  is kept low.  
When  $t_{RES}$ ,  $t_{REH}$ ,  $t_{REPS}$ , and  $t_{REPH}$  cannot meet the specifications, the reset operation is not guaranteed.
  - \*3. When  $t_{REPH}$ ,  $t_{RES}$ ,  $t_{REH}$  ( $\overline{WRES}$  to  $\overline{WCLK}$ ), or  $t_{REPS}$ ,  $t_{REPH}$ ,  $t_{RES}$ ,  $t_{REH}$  ( $\overline{PRES}$  to  $\overline{RCLK}$ ) cannot meet the specifications, the output of video signal A is not guaranteed. (Reset Timing I).
  - \*4. When  $t_{REPS}$  ( $\overline{WRES}$  to  $\overline{RCLK}$ ), or  $t_{RES}$ ,  $t_{REH}$ ,  $t_{REPS}$ ,  $t_{REPH}$  ( $\overline{PRES}$  to  $\overline{RCLK}$ ) cannot meet the specifications, the interpolation signal B is not guaranteed. (Reset Timing II).



### Reset Cycle (1H/2H Mode)

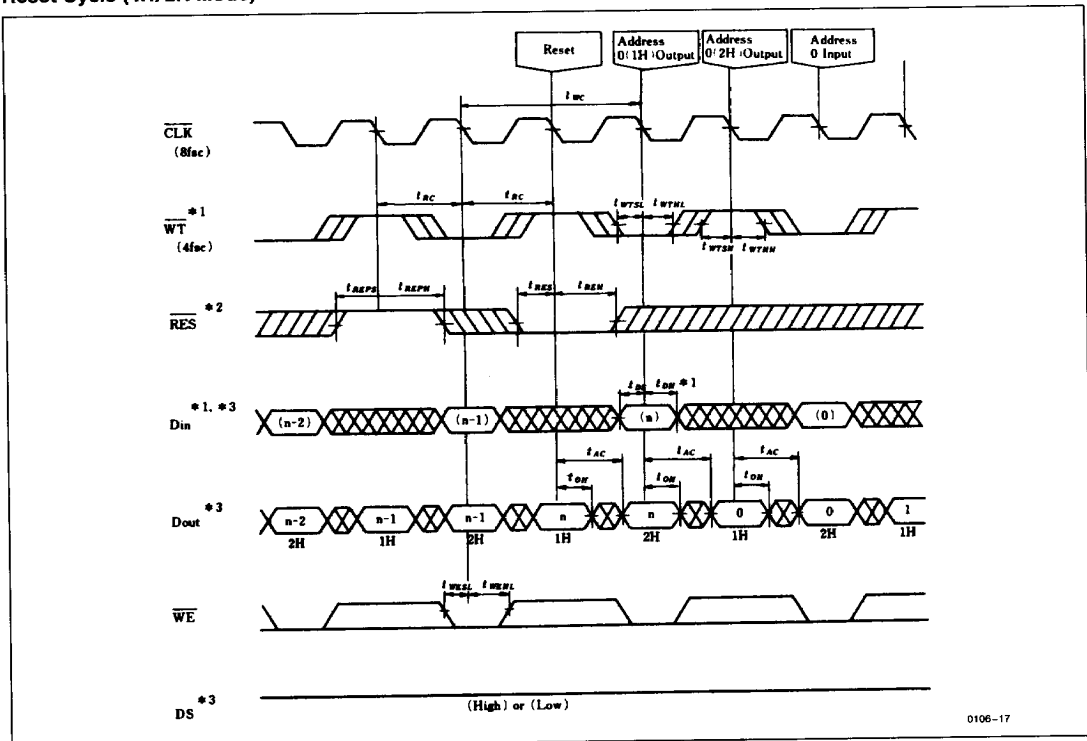


- Notes:
- \*1.  $\overline{WT}$  is the input during half cycle of  $\overline{CLK}$ , meeting the specifications of  $t_{WTSL}$ ,  $t_{WTHL}$ ,  $t_{WTSR}$ , and  $t_{WTHR}$ . Data is written when  $\overline{WT}$  is low. Reset is possible when  $\overline{WT}$  is high.
  - \*2. Read address counter is reset at the first falling edge of  $\overline{CLK}$  after  $\overline{RES}$  falls, meeting the specifications of  $t_{RES}$  and  $t_{REPH}$ ; and it is not reset at the next falling edge of  $\overline{CLK}$  even if  $\overline{RES}$  is kept low.  
When  $t_{RES}$ ,  $t_{REH}$ ,  $t_{REPS}$ , and  $t_{REPH}$  cannot meet the specifications, the reset operation is not guaranteed.
  - \*3. When  $DS$  is fixed high, 1H output data is delayed by  $n$  bits and 2H output data is delayed by  $2n$  bits where  $2n$  is the reset cycle of  $\overline{RES}$ .  
When  $DS$  is fixed low, 1H output data is delayed by  $n - 5$  bits and 2H output data is delayed by  $2n - 5$  bits.



Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300

## Reset Cycle (D Mode)

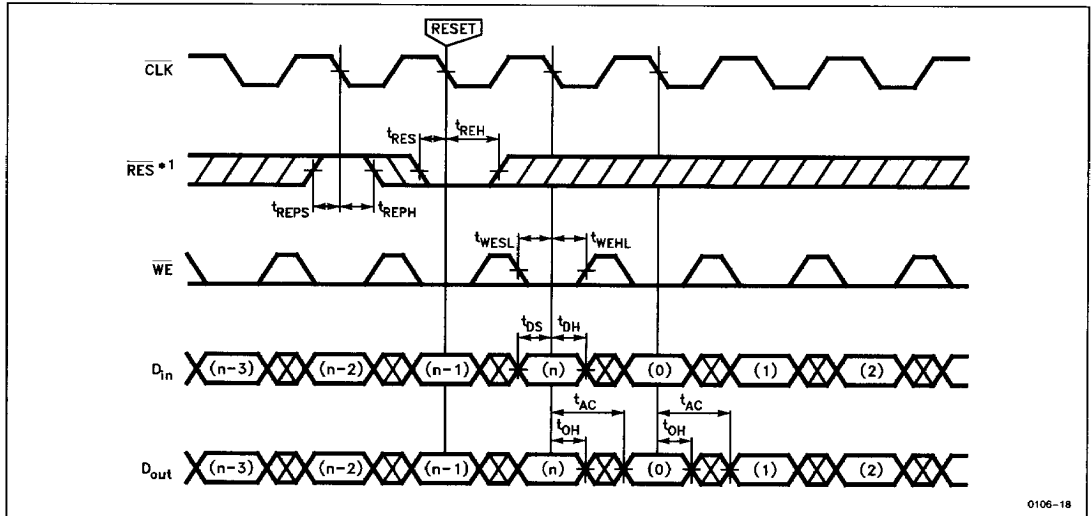


0106-18

Note: \*1. The read address counter is reset at the first falling edge of  $\overline{CLK}$  after  $\overline{RES}$  falls, meeting the specifications of  $t_{REPS}$  and  $t_{REPH}$ , and it is not reset at the next falling edge of  $\overline{CLK}$  even if  $\overline{RES}$  is kept low.

When  $t_{RES}$ ,  $t_{REH}$ ,  $t_{REPS}$ , and  $t_{REPH}$  cannot meet the specifications, the reset operation is not guaranteed.

## Write Enable (TBCE, DSC, TBC, D Modes)

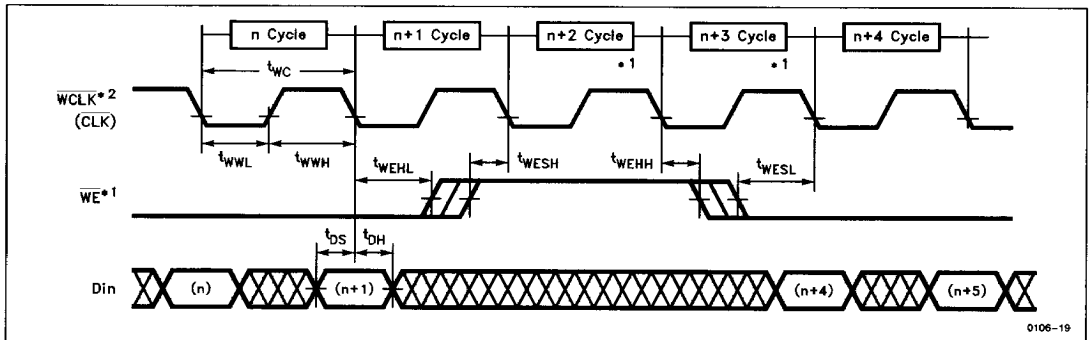


0106-19

Notes: \*1. When  $t_{WEHL}$ ,  $t_{WESH}$ ,  $t_{WEHH}$ , and  $t_{WESL}$  cannot meet the specifications, the write enable operation is not guaranteed.

\*2. In the delay line mode, CLK takes the place of WCLK.




### Write Enable (1H/2H Mode)

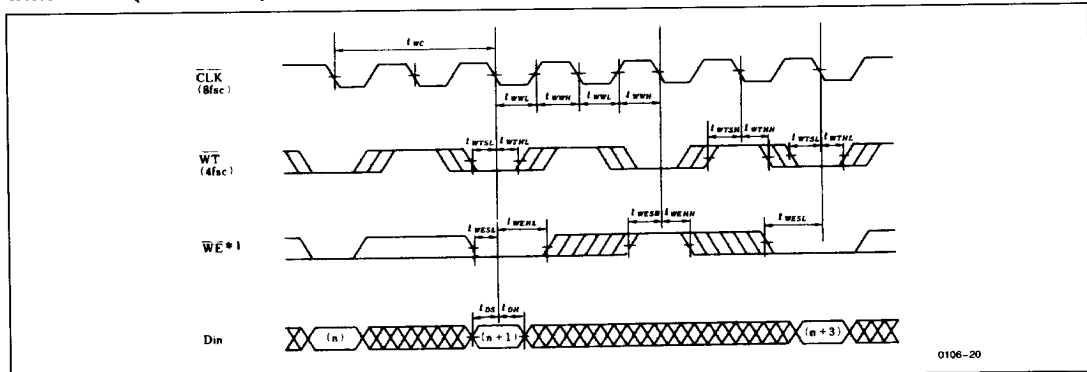

Note: \*1. When  $t_{WTSL}$ ,  $t_{WTHL}$ ,  $t_{WEHL}$ , and  $t_{WEHH}$  cannot meet the specifications, the write enable operation is not guaranteed.


### Decode Output (TBC, D Modes)

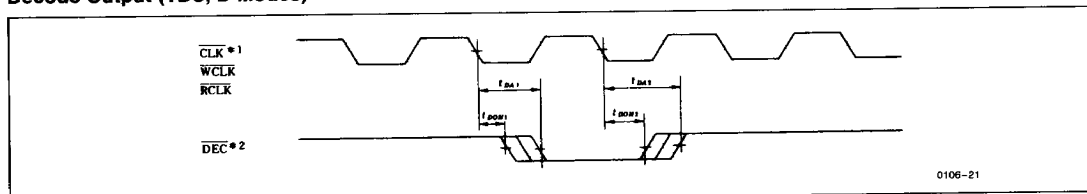

Notes: \*1. In TBC mode,  $\overline{\text{WCLK}}$  or  $\overline{\text{RCLK}}$  takes the place of  $\overline{\text{CLK}}$ .

\*2.  $\overline{\text{DEC}}$  is  $\overline{\text{WDEC}}$  or  $\overline{\text{RDEC}}$  in  $\overline{\text{TBC}}$ ,  $\overline{\text{DEC1}}$ ,  $\overline{\text{DEC2}}$ ,  $\overline{\text{DEC3}}$  or  $\overline{\text{DEC4}}$  in D mode.


### Decode Output (1H/2H Mode)

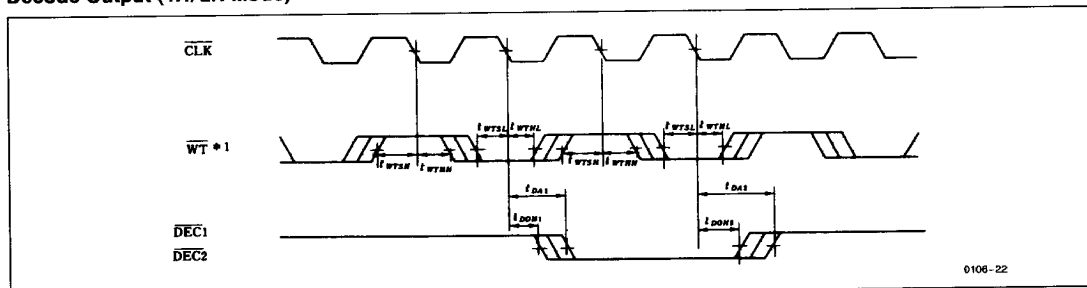

Note: \*1. When  $t_{WTSL}$ ,  $t_{WTHL}$ ,  $t_{WTSH}$ , and  $t_{WTHH}$  cannot meet the specifications, the decode output operation is not guaranteed.



## Output Enable (All Modes)

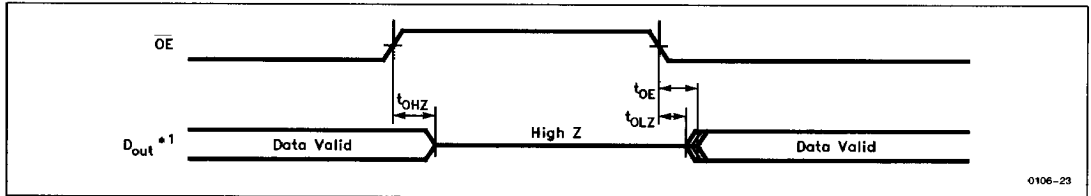

Note: \*1. Transition of  $t_{OHZ}$  and  $t_{WLZ}$  is measured  $\pm 200$  mV from steady state voltage with Output Load B. This parameter is sampled and not 100% tested.

