

PQ05TZ51/PQ05TZ11 Series

Low Power-Loss Voltage Regulators with OFF-state Low Dissipation Current

■ Features

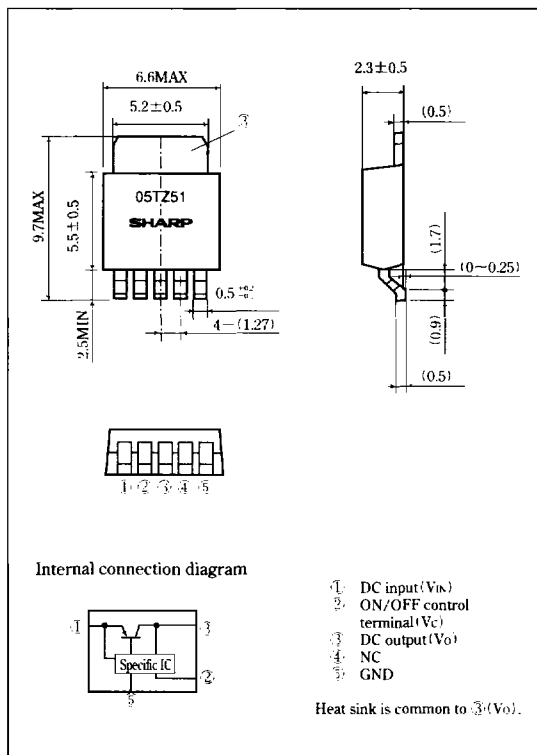
- Low power-loss (Dropout voltage : MAX 0.5V)
- Surface mount type package (Equivalent to EIAJ SC-63)
- Both the 0.5A output PQ05TZ51 series and the 1A output PQ05TZ11 series have high-precision output ($\pm 2.5\%$)
- Low dissipation current at OFF-state (I_{qs} : MAX.5 μ A)
- Built-in ON/OFF control function

■ Model Line-ups

Output voltage		5V Output	9V Output	12V Output
0.5A Output	Output voltage precision: $\pm 2.5\%$	PQ05TZ51	PQ09TZ51	PQ12TZ51
1.0A Output	Output voltage precision: $\pm 2.5\%$	PQ05TZ11	PQ09TZ11	PQ12TZ11

■ Outline Dimensions

(Unit : mm)



■ Absolute Maximum Ratings ($x_x=05,09,12$, $T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating		Unit
		PQxxTZ51	PQxxTZ11	
*1 Input voltage	V_{in}	24		V
*1 Output control voltage	V_c	24		V
Output current	I_o	0.5	1.0	A
*2 Power dissipation	P_D	8		W
*3 Junction temperature	T_j	150		$^\circ\text{C}$
Operating temperature	T_{opr}	-20 to +80		$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +150		$^\circ\text{C}$
Soldering temperature	T_{sol}	260 (For 10s)		$^\circ\text{C}$

*1 All are open except GND and applicable terminals.

*2 With infinite heat sink.

*3 Overheat protection may operate at $125^\circ\text{C} \leq T_j \leq 150^\circ\text{C}$

· Please refer to the chapter "Handling Precautions".

Electrical Characteristics

(Unless otherwise specified, $V_C = 2.7V$, $T_a = 25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	PQ05TZ51/11	V_O *3,*7	4.88	5.0	5.12	V
	PQ09TZ51/11		8.78	9.0	9.22	
	PQ12TZ51/11		11.7	12.0	12.3	
Load regulation	R_{regL}	*3,*4	—	0.2	2.0	%
Line regulation	R_{regI}	$I_O = 5mA$, *8	—	0.1	2.5	%
Temperature coefficient of output voltage	$T_C V_O$	*3, $I_O = 5mA$, $T_J = 0$ to $125^\circ C$	—	± 0.01	—	$\%/^\circ C$
Ripple rejection	RR	Refer to Fig. 2	45	60	—	dB
Dropout voltage	V_{I-O}	*7,*5	—	0.2	0.5	V
ON-state voltage for control	$V_C(ON)$	*3,*6,*7	2.0	—	—	V
ON-state current for control	$I_C(ON)$	*3,*7	—	—	200	μA
OFF-state voltage for control	$V_C(OFF)$	*3	—	—	0.8	V
OFF-state current for control	$I_C(OFF)$	*3, $V_C = 0.4V$	—	—	10	μA
Quiescent current	I_Q	*3, $I_O = 0A$	—	4	10	mA
Output OFF-state dissipation current	I_{QS}	*3, $V_C = 0.4V$, $I_O = 0A$	—	—	5	μA

*3 PQ05TZ51/11: $V_{IN} = 7V$ PQ09TZ51/11: $V_{IN} = 11V$ PQ12TZ51/11: $V_{IN} = 14V$ *4 PQxxTZ51: $I_O = 5mA$ to $0.5A$, PQxxTZ51: $I_O = 5mA$ to $1.0A$

*5 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

*6 In case of opening control terminal ②, output voltage turns off.

*7 PQxxTZ51: $I_O = 0.3A$, PQxxTZ11: $I_O = 0.5A$ *8 PQ05TZ51/11: $V_{IN} = 6V$ to $16V$ PQ09TZ51/11: $V_{IN} = 10V$ to $20V$ PQ12TZ51/11: $V_{IN} = 13V$ to $23V$

Fig. 1 Test Circuit

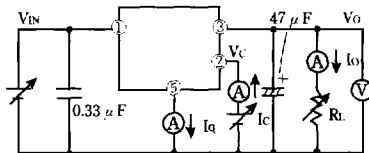


Fig. 2 Test Circuit of Ripple Rejection


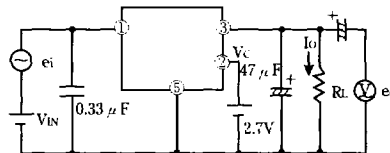
 $f = 120Hz$ (sine wave) $e_i = 0.5V_{rms}$ $V_{IN} = 7V$ (PQ05TZ51/11) $V_{IN} = 11V$ (PQ09TZ51/11) $V_{IN} = 14V$ (PQ12TZ51/11) $I_O = 0.3A$ $RR = 20 \log(e_i/e_o)$

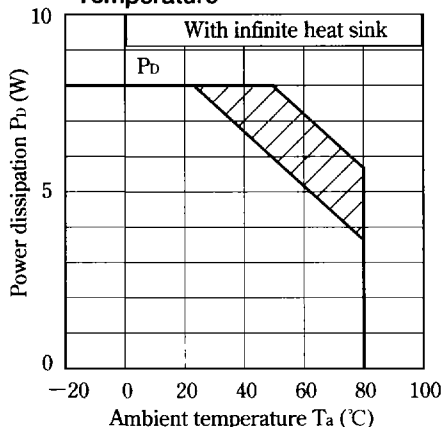Fig. 3 Power Dissipation vs. Ambient Temperature



Note) Oblique line portion : Overheat protection may operate in this area.

Fig. 4 Overcurrent Protection Characteristics (Typical Value) (xx = 05,09,12)

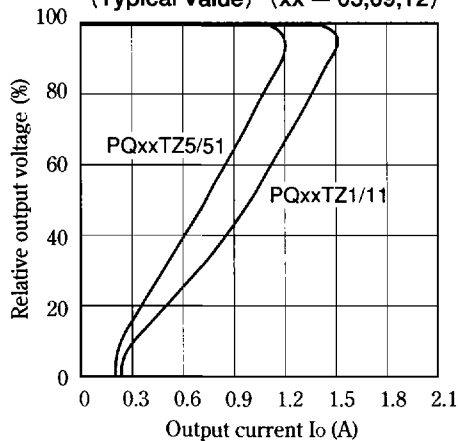


Fig. 5 Output Voltage Deviation vs. Junction Temperature (PQ05TZ51/11)

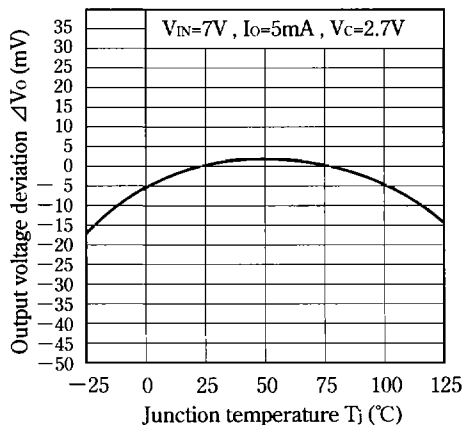


Fig. 6 Output Voltage Deviation vs. Junction Temperature (PQ09TZ51/11)

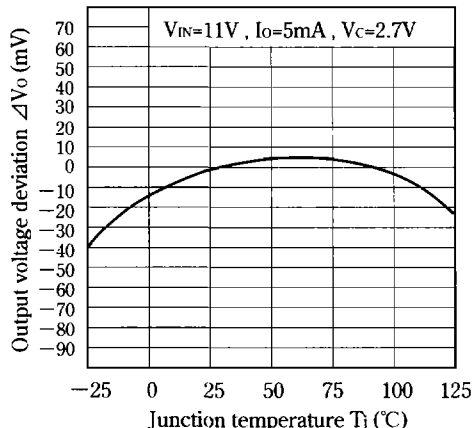


Fig. 7 Output Voltage Deviation vs. Junction Temperature (PQ12TZ51/11)

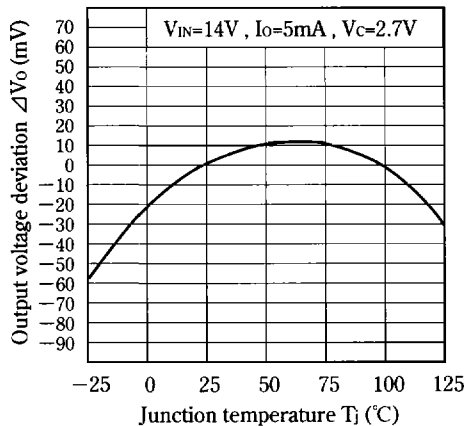


Fig. 8 Output Voltage vs. Input Voltage (PQ05TZ51)

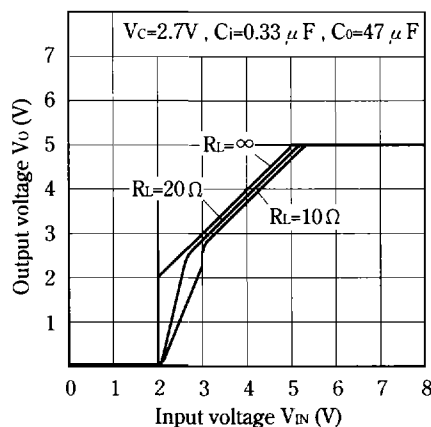


Fig. 9 Output Voltage vs. Input Voltage
(Typical Value) (PQ09TZ51)

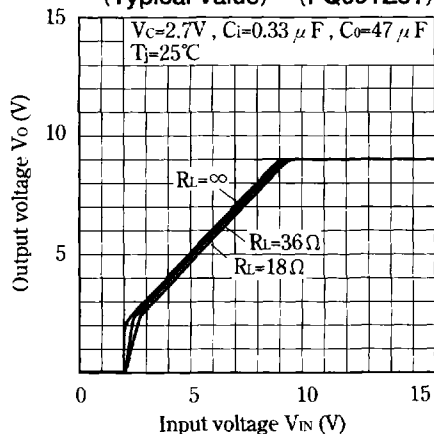


Fig.10 Output Voltage vs. Input Voltage
(Typical Value) (PQ12TZ51)

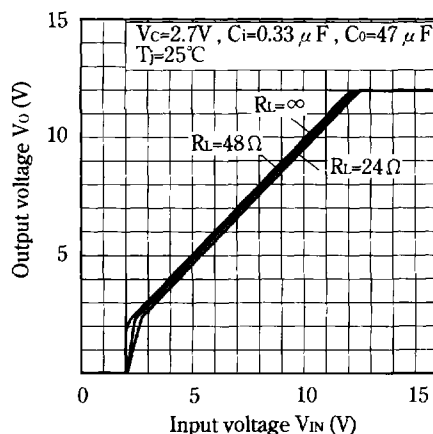


Fig.11 Output Voltage vs. Input Voltage
(Typical Value) (PQ05TZ11)

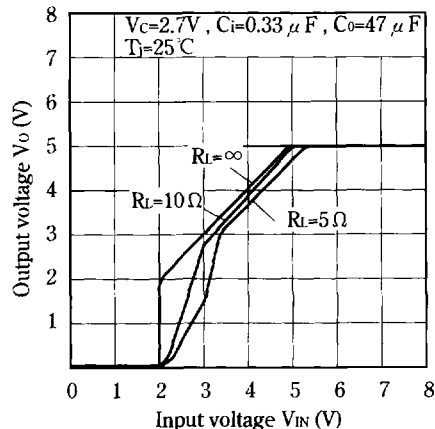


Fig.12 Output Voltage vs. Input Voltage
(PQ09TZ11)

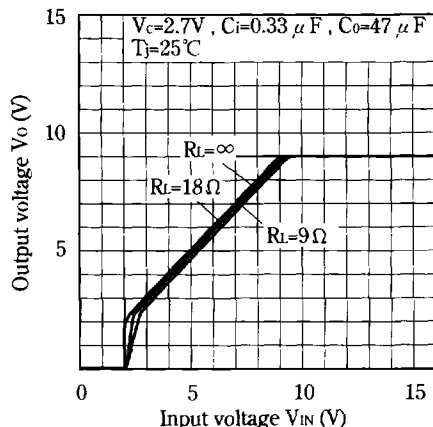


Fig.13 Output Voltage vs. Input Voltage
(PQ12TZ11)

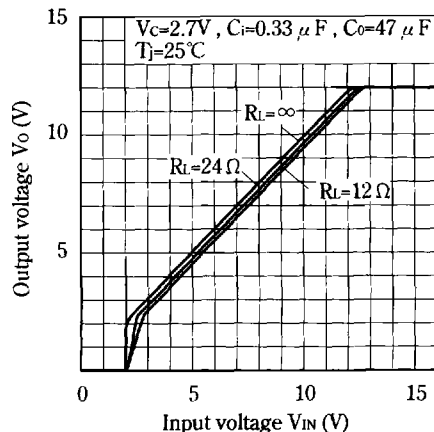


Fig.14 Dropout Voltage vs. Junction Temperature
(PQ05TZ51/PQ09TZ51/PQ12TZ51)

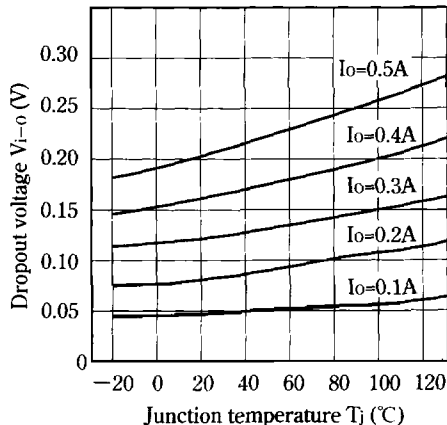


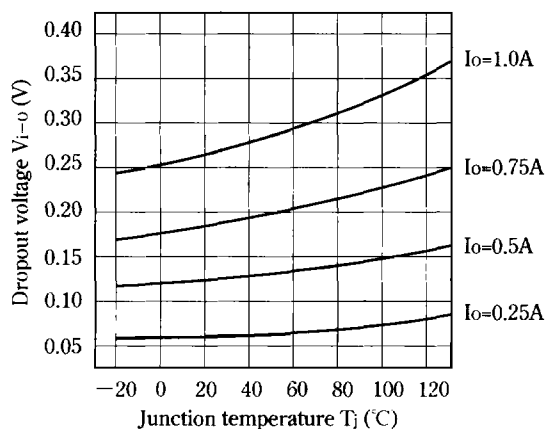
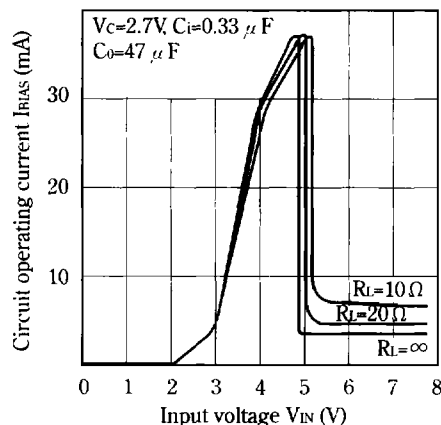
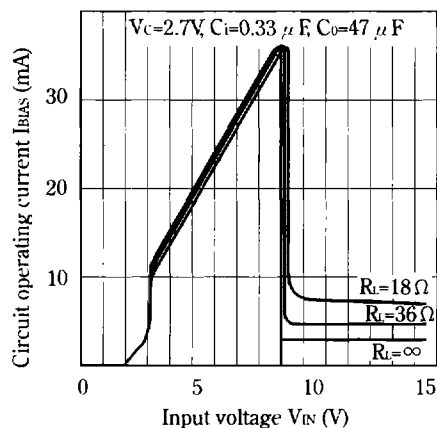
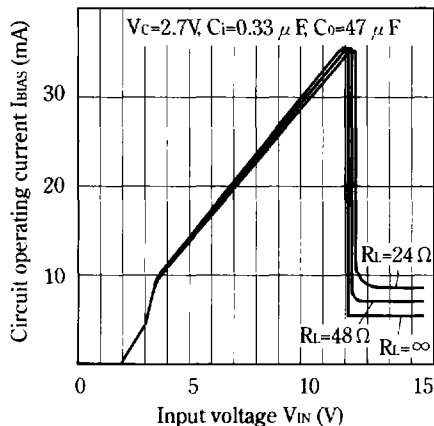
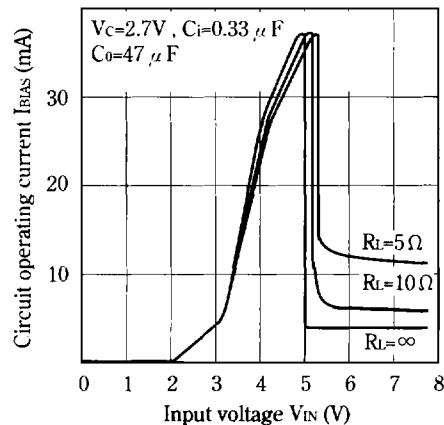
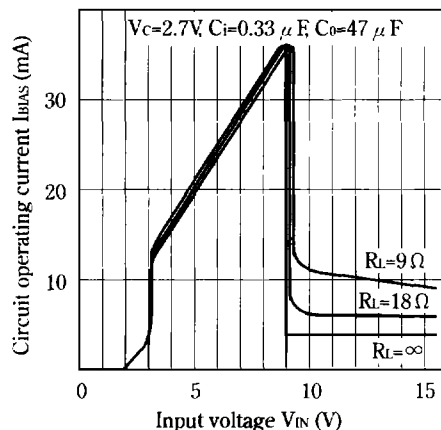
Fig.15 Dropout Voltage vs. Junction Temperature (PQ05TZ11/PQ09TZ11/PQ12TZ11)**Fig.16 Circuit Operating Current vs. Input Voltage (PQ05TZ51)****Fig.17 Circuit Operating Current vs. Input Voltage (PQ09TZ51)****Fig.18 Circuit Operating Current vs. Input Voltage (PQ12TZ51)****Fig.19 Circuit Operating Current vs. Input Voltage (PQ05TZ11)****Fig.20 Circuit Operating Current vs. Input Voltage (PQ09TZ11)**

Fig.21 Circuit Operating Current vs. Input Voltage (PQ12TZ11)

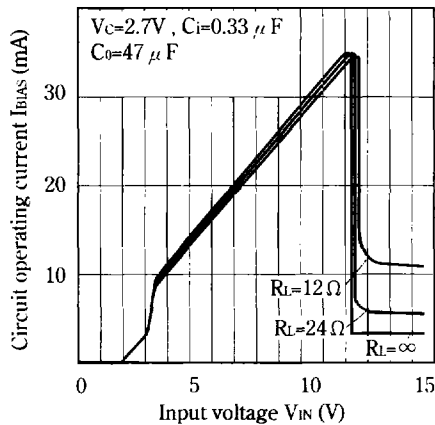


Fig.22 Quiescent Current vs. Junction Temperature

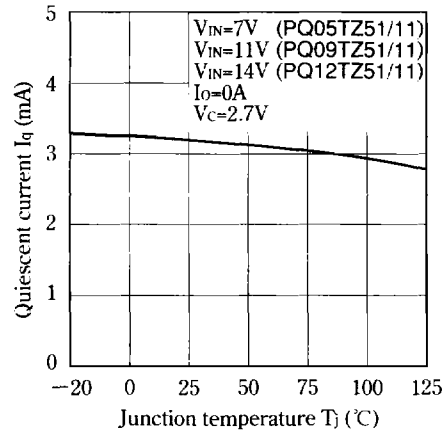


Fig.23 Ripple Rejection vs. Input Ripple Frequency (PQ05TZ51/PQ09TZ51/PQ12TZ51)

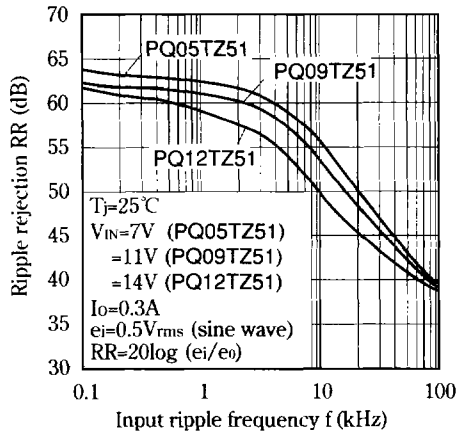


Fig.24 Ripple Rejection vs. Input Ripple Frequency (PQ05TZ11/PQ09TZ11/PQ12TZ11)

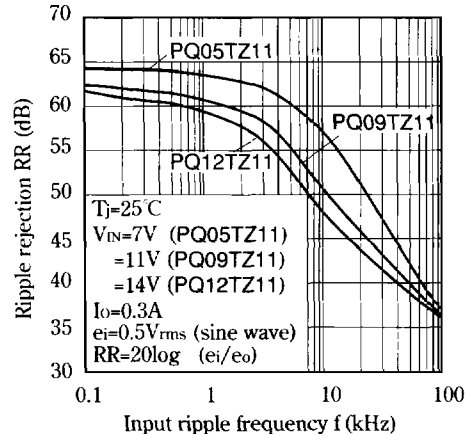


Fig.25 Ripple Rejection vs. Output Current (PQ05TZ51/PQ09TZ51/PQ12TZ51)

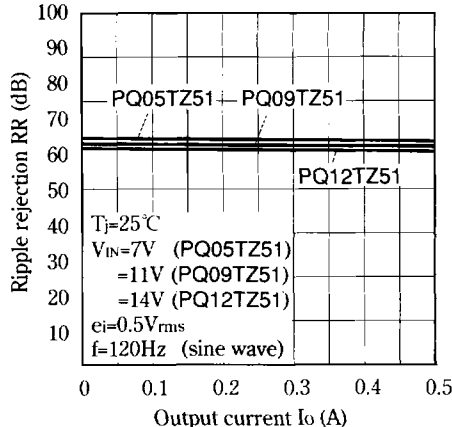


Fig.26 Ripple Rejection vs. Output Current (PQ05TZ11/PQ09TZ11/PQ12TZ11)

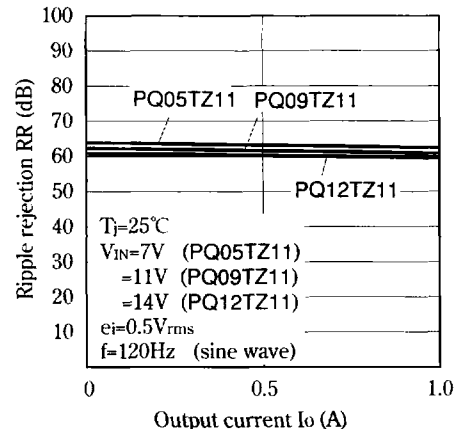


Fig.27 Output Peak Current vs. Dropout Voltage (PQ05TZ51/PQ09TZ51/PQ12TZ51)

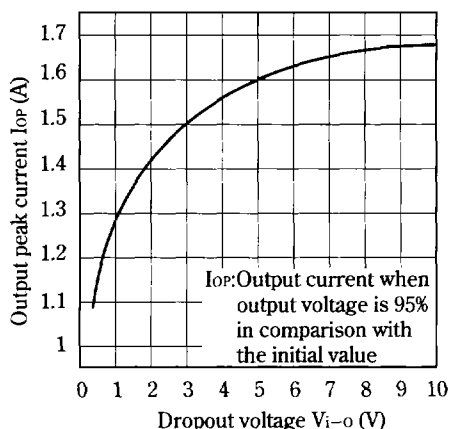


Fig.28 Output Peak Current vs. Dropout Voltage (PQ05TZ11/PQ09TZ11/PQ12TZ11)

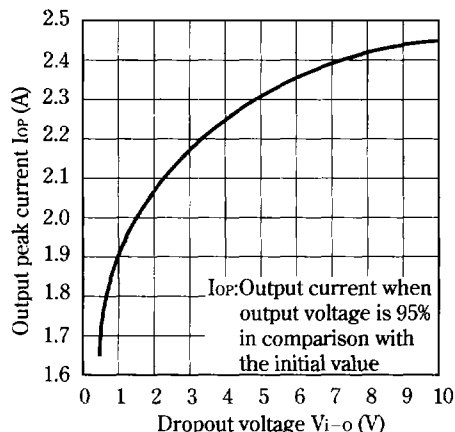


Fig.29 Output Peak Current vs. Junction Temperature (PQ05TZ51/PQ09TZ51/PQ12TZ51)

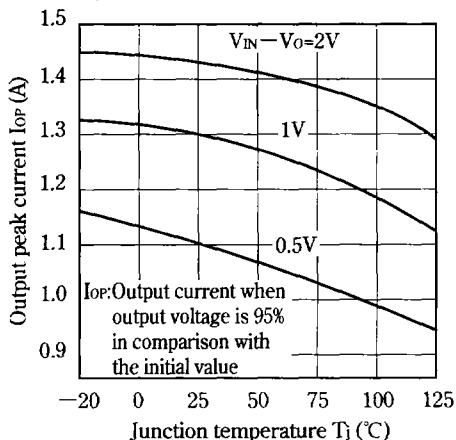


Fig.30 Output Peak Current vs. Junction Temperature (PQ05TZ11/PQ09TZ11/PQ12TZ11)



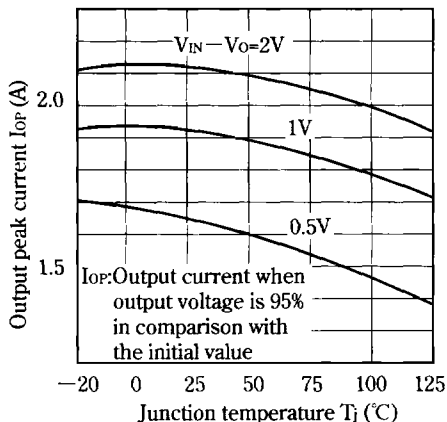


Fig.31 Power Dissipation vs. Ambient Temperature (Typical Value)

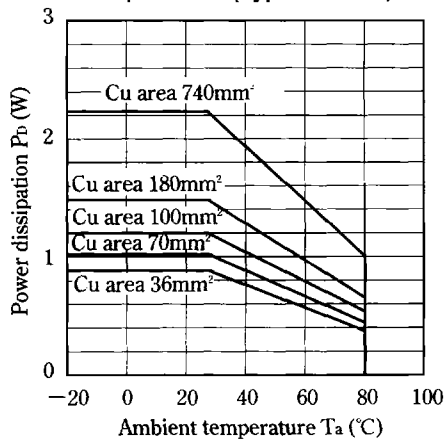


PWB



Material : Glass-cloth epoxy resin
Size : 50×50×1.6mm³
Cu thickness : 35 μ m

■ ON/OFF Operation

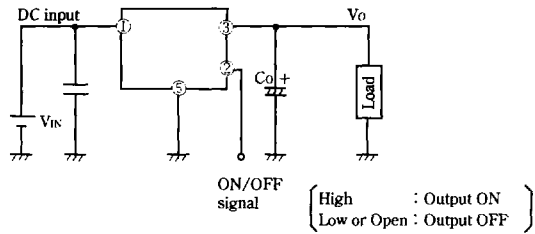As shown in the figure,ON/OFF control function is available.



■ Model Line-ups for Tape-packaged Products

Output current	Sleeve-packaged products		Tape-packaged products	
	Standard type	High-precision output type	Standard type	High-precision output type
0.5A output	—	PQ05TZ51 Series	—	PQ05TZ5U Series
1.0A output	—	PQ05TZ11 Series	—	PQ05TZ1U Series