

## Quadruple Differential Comparators


### DESCRIPTION

The LM339 consists of four independent voltage comparators. These were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. The outputs can be connected to other open-collector outputs to achieve wired-AND relationships.

### FEATURES

- Wide supply voltage range
- Low supply current drain independent of supply voltage.
- Low input biasing current
- Low input offset current
- Low input offset voltage
- Input common-mode voltage range includes GND
- Differential input voltage range equal to the power supply voltage
- Low output saturation voltage
- Output voltage compatible with TTL, MOS and CMOS logic

### PACKAGE INFORMATION

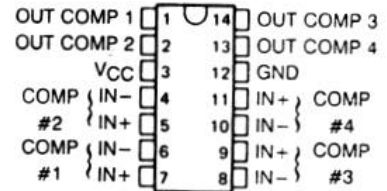

### ELECTRICAL CHARACTERISTICS

at specified free-air temperature,  $V_{CC}=5V$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS*		MIN	TYP	MAX	UNIT
$V_{IO}$ Input offset voltage	$V_{CC}=5V$ to $30V$		25 °C	2	5	mV
	$V_{IC}= V_{ICRmin}$ , $V_O=1.4V$		Full range		9	
$I_{IO}$ Input offset current	$V_O=1.4V$		25 °C	5	50	nA
			Full range		150	
$I_{IB}$ Input bias current	$V_O=1.4V$		25 °C	-25	-250	nA
			Full range		-400	
$V_{ICR}$ Common-mode input voltage range**			25 °C	0 to $V_{CC}-1.5$		V
			Full range	0 to $V_{CC}-2$		
$A_{VD}$ Large-signal differential voltage amplification	$V_{CC}=15V$ , $V_O=1.4V$ to $11.4V$ , $R_L \geq 15k\Omega$ to $V_{CC}$		25 °C	50	200	V/mV
$I_{OH}$ High-level output current	$V_{OH}=5V$ , $V_{ID}=1V$		25 °C	0.1	50	nA
	$V_{OH}=30V$ , $V_{ID}=1V$		Full range		1	
$V_{OL}$ Low-level output voltage	$I_{OL}=4mA$ , $V_{ID}= -1V$		25 °C	150	400	mV
			Full range		700	
$I_{OL}$ Low-level output current	$V_{OL}=1.5V$ , $V_{ID}= -1V$		25 °C	6		mA
$I_{CC}$ Supply current	$R_L= \infty$	$V_{CC}=5V$	25 °C	0.8	2	mA
		$V_{CC}=30V$	Full range		2.5	

\* Full range (MIN to MAX), for the LM339 is 0 °C to 70 °C. All characteristics are measured with zero common-mode input voltage unless otherwise specified.


\*\* The voltage at either input or common-mode should not be allowed to go negative by more than 0.3 V. The upper end of the common-mode voltage range is  $V_{CC} - 1.5 V$ , but either or both inputs can go to 30 V without damage.

### SWITCHING CHARACTERISTICS, $V_{CC}=5V$ , $\theta_A=25$ °C

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Response time	$R_L$ connected to 5V through 5.1k $\Omega$ , $C_L=15pF$ * (See Note 1)	100-mV input step with 5-mV overdrive		1.3		$\mu s$
		TTL-level input step		0.3		

\*  $C_L$  includes probe and jig capacitance.

NOTE 1: The response time specified is the interval between the input step function and the instant when the output crosses 1.4V.

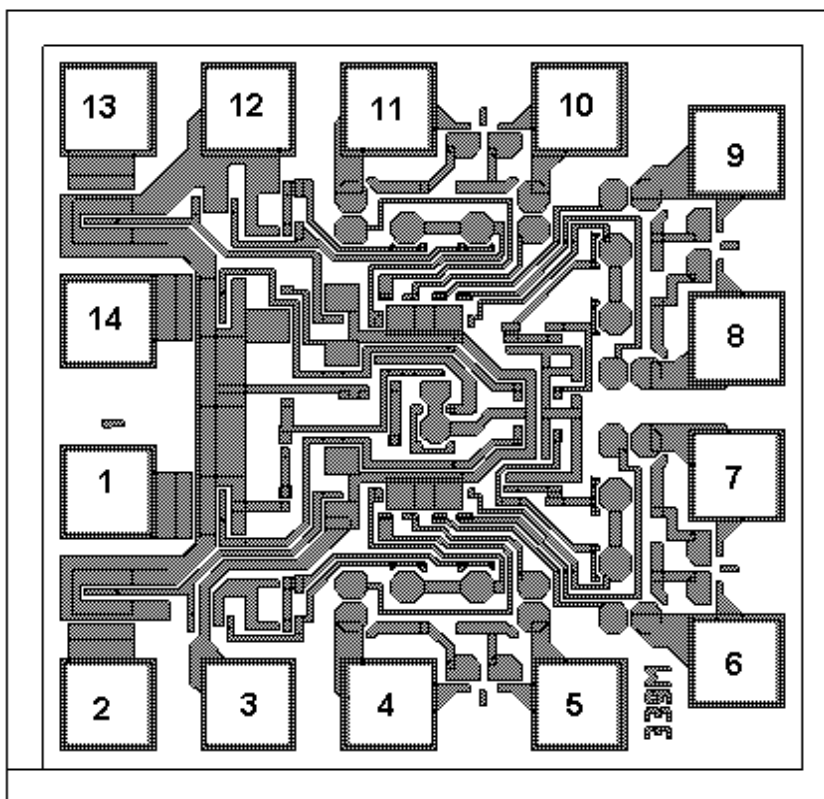**PAD LOCATION LM339M**


Chip Size: 0.92 x 0.90 mm<sup>2</sup>

**PAD LOCATION COORDINATES**

Pad N	Pad Name	Pad size (mm x mm)	Coordinates, mkm	
			X	Y
1	# 1 OUT	95 x 95	112	353
2	# 2 OUT	95 x 95	112	112
3	V <sub>CC</sub>	95 x 95	267	112
4	# 2 IN-	95 x 95	422	112
5	# 2 IN+	95 x 95	633	112
6	# 1 IN-	95 x 95	807	161
7	# 1 IN+	95 x 95	807	372
8	# 3 IN-	95 x 95	807	527
9	# 3 IN+	95 x 95	807	738
10	# 4 IN-	95 x 95	633	787
11	# 4 IN+	95 x 95	422	787
12	GND	95 x 95	267	787
13	# 4 OUT	95 x 95	112	787
14	# 3 OUT	95 x 95	112	546