

# **Technical Data Sheet**

# 0805 Package Chip LED(1.0mm Height)

### Features

LIGHTING

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version

### Descriptions


- The 17-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

### **Device Selection Guide**


Dout No	Chip	Emitted Color	Resin Color	
Part No.	Material	<b>Emitted Color</b>		
17-21/T1D-CP2R1TY/3T	InGaN	Pure White	Yellow Diffused	




17-21/T1D-CP2R1TY/3T




### **Package Outline Dimensions**

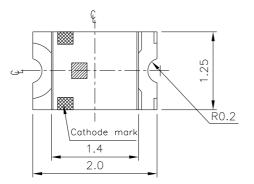





17-21/T1D-CP2R1TY/3T



For reflow soldering (Propose)





**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

E

ÆRLIGHT

## 17-21/T1D-CP2R1TY/3T

### Absolute Maximum Ratings (Ta=25°C)

(1u-20 V)				
Parameter	Symbol	Rating	Unit	
Reverse Voltage	V <sub>R</sub>	5	V	
Forward Current	$I_{\rm F}$	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	$I_{FP}$	100	mA	
Power Dissipation	P <sub>d</sub>	95	mW	
Electrostatic Discharge(HBM)	ESD	150	V	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Soldering Temperature	Tsol	Reflow Soldering : $260 \degree C$ for 10 sec. Hand Soldering : $350 \degree C$ for 3 sec.		

### Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_V$	57.0		140	mcd	
Viewing Angle	2 <del>0</del> 1/2		150		deg	I <sub>F</sub> =5mA
Forward Voltage	$V_{\rm F}$	2.60		3.00	V	
Reverse Current	I <sub>R</sub>			50	$\mu A$	V <sub>R</sub> =5V

Notes:

1.Tolerance of Luminous Intensity  $\pm 11\%$ 

2.Tolerance of Forward Voltage ±0.05V

# 17-21/T1D-CP2R1TY/3T

### **Bin Range Of Luminous Intensity**

ÆRLIGHT

FOREVER

E

LIGHTING

8	Jan State St			
Bin Code	Min.	Max.	Unit	Condition
P2	57.0	72.0		
Q1	72.0	90.0	mcd	I <sub>F</sub> =5mA
Q2	90.0	112		
R1	112	140		

### **Bin Range Of Forward Voltage**

Symbol	Bin Code	Min.	Max.	Unit	Condition
Т	28	2.60	2.70		I <sub>F</sub> =5mA
	29	2.70	2.80	V	
	30	2.80	2.90		
	31	2.90	3.00		

### Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.05V

# 17-21/T1D-CP2R1TY/3T

### **Chromaticity Coordinates Specifications for Bin Grading**

ERLIGH

FOREVER

E

LIGHTING

Group	Bin Code	CIE_x	CIE_y	Condition
		0.274	0.226	
	1	0.274	0.258	
	1	0.294	0.286	
		0.294	0.254	
		0.274	0.258	
	2	0.274	0.291	
		0.294	0.319	
С		0.294	0.286	In Such
C	3	0.294	0.254	IF=5mA
		0.294	0.286	
		0.314	0.315	
		0.314	0.282	
	4	0.294	0.286	
		0.294	0.319	
		0.314	0.347	
		0.314	0.315	

Notes:

1.The C.I.E. 1931 chromaticity diagram ( Tolerance ±0.01).

2. The products are sensitive to static electricity and care must be fully taken when handling products.


# 17-21/T1D-CP2R1TY/3T

## **CIE Chromaticity Diagram**

FOREVER

**EVERLIGHT** 

LIGHTING

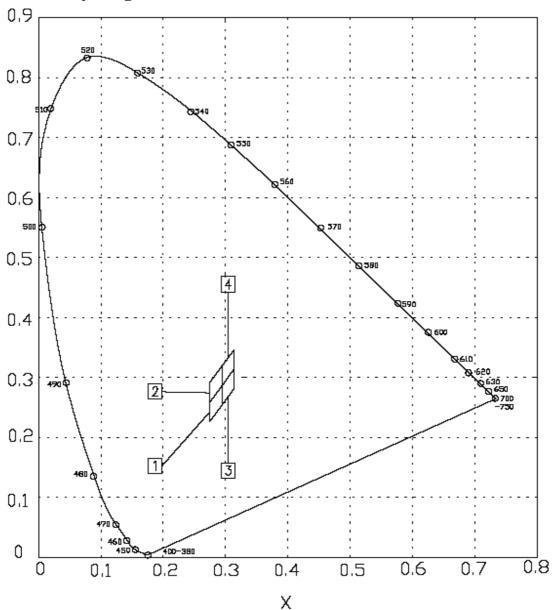

http://www.everlight.com Prepared date: 30-Jun-2011

# 17-21/T1D-CP2R1TY/3T


4.5

# **Typical Electro-Optical Characteristics Curves**

EVERLIGHT

FOREVER

LIGHTING

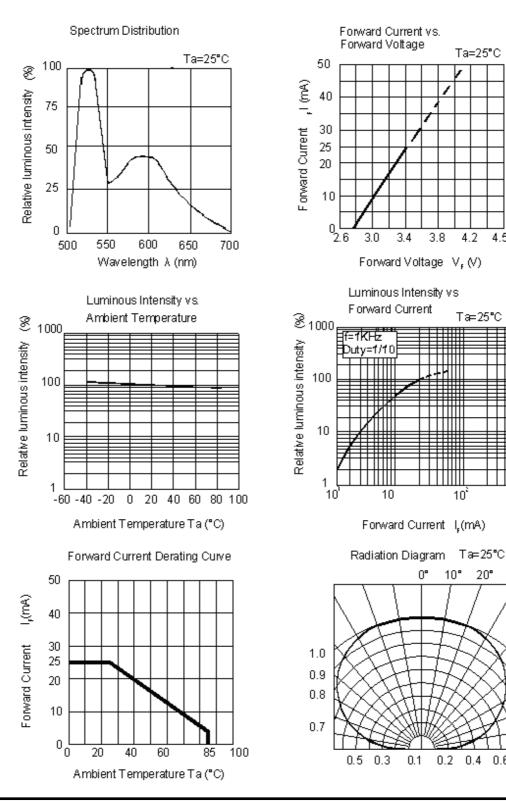

Everlight Electronics Co., Ltd. Device No. : DSE-000

http://www.everlight.com Prepared date: 30-Jun-2011

Rev. 1 Page: 7 of 12 Prepared by : ZhouChen

30°

40°

50°

60°

70°

80°

90°

0.6

# 17-21/T1D-CP2R1TY/3T

### Label explanation

**EVERLIGHT** 

LIGHTING

**CAT: Luminous Intensity Rank** 


FOREVER

**HUE: Chromaticity Coordinates** 

**REF: Forward Voltage Rank** 




### **Reel Dimensions**

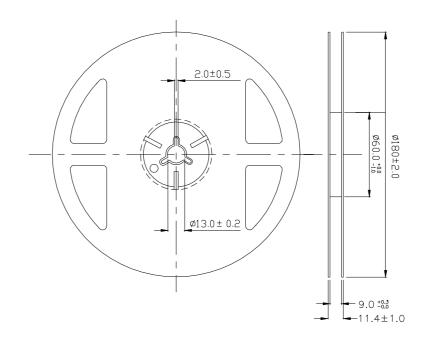

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## <u>17-21/T1D-CP2R1TY/3T</u>

### **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

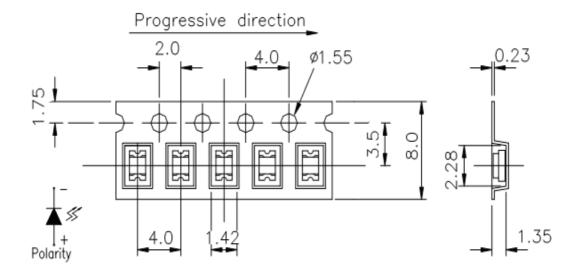


**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

### **Moisture Resistant Packaging**

ÆRLIGHT

FOREVER

LIGHTING

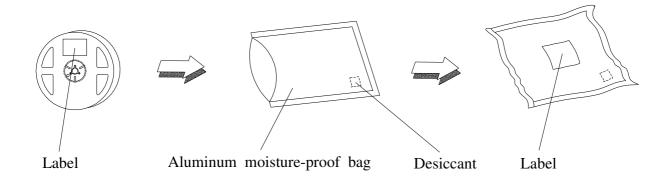

EVERLIGHT

# 17-21/T1D-CP2R1TY/3T

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

# 17-21/T1D-CP2R1TY/3T

### **Precautions For Use**

ERLIGHT


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under  $30^{\circ}$ C or less and 60% RH or less.

If unused LEDs remain, it should be stored in moisture proof packages.

- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5℃ for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

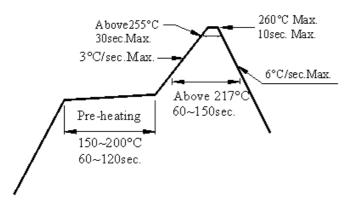

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

# 17-21/T1D-CP2R1TY/3T

#### 4.Soldering Iron

LIGHTING


RLIGHT

FOREVER

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

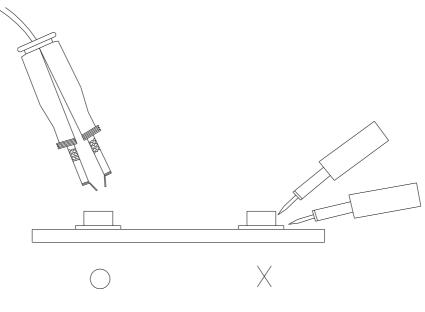

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

*Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

http://www.everlight.com Prepared date: 30-Jun-2011