# FAIRCHILD

SEMICONDUCTOR®

# KSA1175

## Low Frequency Amplifier

- Collector-Base Voltage : V<sub>CBO</sub>= -60V
- Complement to KSC2785



1.Emitter 2. Collector 3. Base

# **PNP Epitaxial Silicon Transistor**

Absolute Maximum Ratings  $T_a=25$  °C unless otherwise noted

Symbol	Parameter	Ratings	Units
V <sub>CBO</sub>	Collector-Base Voltage	-60	V
V <sub>CEO</sub>	Collector-Emitter Voltage	-50	V
V <sub>EBO</sub>	Emitter-Base Voltage	-5	V
c	Collector Current	-150	mA
P <sub>C</sub>	Collector Power Dissipation	250	mW
ТJ	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature	-55 ~ 150	°C


## **Electrical Characteristics** $T_a=25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV <sub>CBO</sub> Collector-Base Breakdown Voltage		I <sub>C</sub> = -100μA, I <sub>E</sub> =0	-60			V
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> = -10mA, I <sub>B</sub> =0	-50			V
BV <sub>EBO</sub> Emitter-Base Breakdown Voltage		I <sub>E</sub> = -10μΑ, I <sub>C</sub> =0	-5			V
I <sub>CBO</sub>	Collector Cut-off Current	V <sub>CB</sub> = -60V, I <sub>E</sub> =0			-0.1	μA
I <sub>EBO</sub> Emitter Cut-off Current		V <sub>EB</sub> = -5V, I <sub>C</sub> =0			-0.1	μA
h <sub>FE</sub>	DC Current Gain	V <sub>CE</sub> = -6V, I <sub>C</sub> = -1mA	40		700	
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> = -100mA, I <sub>B</sub> = -10mA		-0.18	-0.3	V
V <sub>BE</sub> (on) Base-Emitter On Voltage		V <sub>CE</sub> = -6V, I <sub>E</sub> = -1mA	-0.50	-0.62	-0.80	V
f <sub>T</sub> Current Gain Bandwidth Product		V <sub>CE</sub> = -6V, I <sub>C</sub> = -10mA	50	180		MHz
C <sub>ob</sub> Output Capacitance		V <sub>CB</sub> = -10V, I <sub>E</sub> =0, f=1MHz		2.8		pF
NF	Noise Figure	$V_{CE}$ = -6V, I <sub>C</sub> = -0.3mA f=100Hz, R <sub>S</sub> =10K $\Omega$		6.0	20	dB

## h<sub>FE</sub> Classification


Classification	R	0	Y	G	L
h <sub>FE</sub>	40 ~ 80	70 ~ 140	120 ~ 240	200 ~ 400	350 ~ 700

# KSA1175

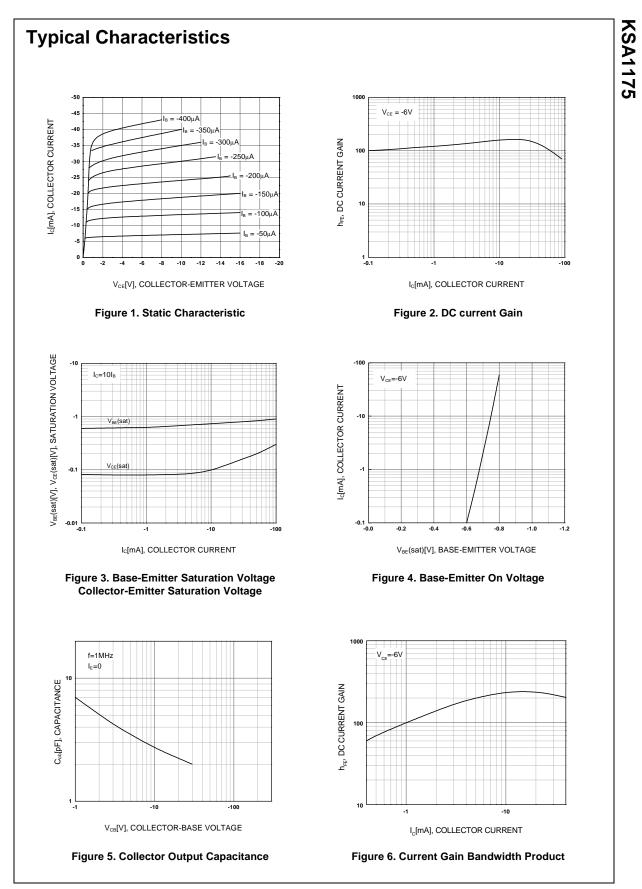

©2001 Fairchild Semiconductor Corporation

Rev. A1, June 2001

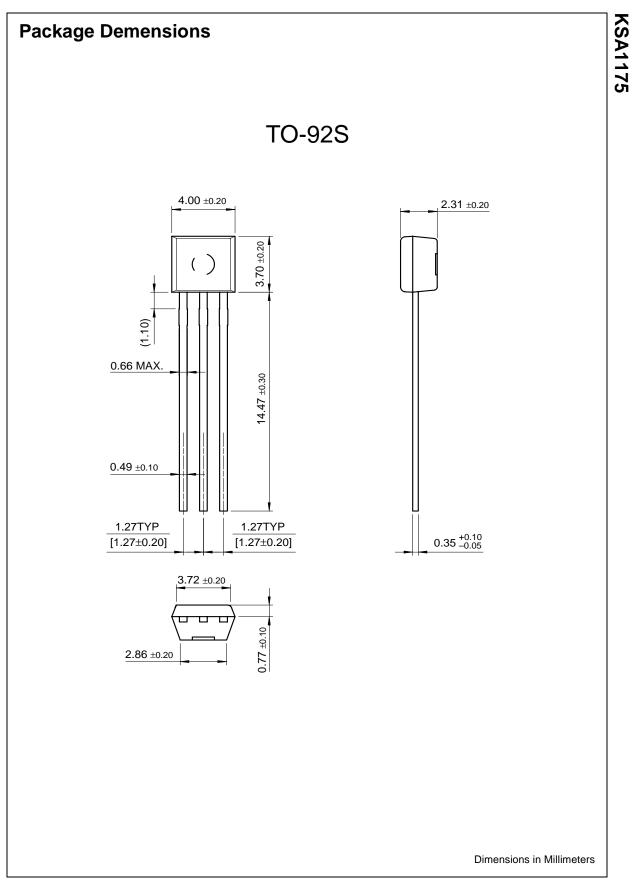

©2001 Fairchild Semiconductor Corporation

#### TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx<sup>TM</sup> Bottomless<sup>TM</sup> CoolFET<sup>TM</sup>  $CROSSVOLT^{TM}$ DenseTrench<sup>TM</sup> DOME<sup>TM</sup> EcoSPARK<sup>TM</sup>  $E^2CMOS^{TM}$ EnSigna<sup>TM</sup> FACT<sup>TM</sup> FACT Quiet Series<sup>TM</sup> FAST<sup>®</sup> FASTr<sup>™</sup> FRFET<sup>™</sup> GlobalOptoisolator<sup>™</sup> GTO<sup>™</sup> HiSeC<sup>™</sup> ISOPLANAR<sup>™</sup> LittleFET<sup>™</sup> MicroFET<sup>™</sup> MICROWIRE<sup>™</sup> OPTOLOGIC<sup>™</sup>

OPTOPLANAR™ PACMAN™ POP™ Power247™ PowerTrench<sup>®</sup> QFET™ QS™ QT Optoelectronics™ Quiet Series™ SLIENT SWITCHER<sup>®</sup> SMART START™ STAR\*POWER<sup>™</sup> Stealth<sup>™</sup> SuperSOT<sup>™</sup>-3 SuperSOT<sup>™</sup>-6 SuperSOT<sup>™</sup>-8 SyncFET<sup>™</sup> TruTranslation<sup>™</sup> TinyLogic<sup>™</sup> UHC<sup>™</sup> UltraFET<sup>®</sup> VCX<sup>™</sup>

STAR\*POWER is used under license

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Fairchild Semiconductor		sSEARCH   <u>Parametric</u>   <u>Cross Reference</u>		
		space Produc	et Folders and Applica	
find products	Home >> Find products >>			
Products groups	KSA1175 PNP Epitaxial Silicon Transistor		Related Links	
<u>Analog and Mixed</u> <u>Signal</u> <u>Discrete</u> <u>Interface</u>	Contents Features   Product status/pricing/packaging	Datasheet Download this datasheet	Request samples Dotted line How to order products Dotted line Dotted line	
<u>Logic</u> <u>Microcontrollers</u> <u>Non-Volatile</u>	Features	PDF	Product Change Notices (PCNs) Dotted line Support	
<u>Memory</u> <u>Optoelectronics</u> <u>Markets and</u>	Low Noise Amplifier	<u>e-mail this datasheet</u> • <u>[E-</u>	Distributor and field sales representatives	
applications New products Product selection and	<ul> <li>Collector,Base Voltage : V<sub>CBO</sub>=-60V</li> <li>Complement to KSC2785</li> </ul>	This page <u>Print version</u>	Dotted line Quality and reliability Dotted line Design tools	
parametric search Cross-reference	back to top			

back to top

search

buy products

my Fairchild

company

technical support

technical information

Product status/pricing/packaging

f	Product	Product status	Pricing*	Package type	Leads	Packing method
Ţ						
	KSA1175YTA	Full Production	\$0.058	<u>TO-92S</u>	3	TAPE REEL
ł	KSA1175OBU	Full Production	\$0.058	<u>TO-92S</u>	3	BULK
Ţ	KSA1175OTA	Full Production	\$0.058	TO-92S	3	TAPE REEL
		E-11 Dec. best in a				
4	KSA1175GTA	Full Production	\$0.058	<u>TO-92S</u>	3	TAPE REEL
	KSA1175GBU	Full Production	\$0.058	<u>TO-92S</u>	3	BULK
	KSA1175YBU	Full Production	\$0.058	TO-92S	3	BULK
			<u> </u>			
	KSA1175LTA	Full Production	\$0.058	<u>TO-92S</u>	3	TAPE REEL
	KSA1175RTA	Full Production	\$0.045	<u>TO-92S</u>	3	TAPE REEL

\* 1,000 piece Budgetary Pricing

#### back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor