

STANDARD RECOVERY DIODES

Hockey Puk Version

Features

- Wide current range
- High voltage ratings up to 2400V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style B-44 (R-PUK)


Typical Applications

- Converters
- Power supplies
- High power drives
- Auxiliary system supplies for traction applications

Major Ratings and Characteristics

Parameters	SD6000C..R	Units	
$I_{F(AV)}$	6690	A	
@ T_{hs}	55	°C	
$I_{F(RMS)}$	11150	A	
@ T_{hs}	25	°C	
I_{FSM}	@ 50Hz	76400	A
	@ 60Hz	80000	A
I^2t	@ 50Hz	29200	KA ² s
	@ 60Hz	26650	KA ² s
V_{RRM} range	1200 to 2400	V	
T_J	- 40 to 175	°C	

6690A



case style B-44 (R-PUK)

SD6000C..R Series

Bulletin I2035 rev. B 04/00

International
IRF Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} : maximum repetitive peak reverse voltage V	V_{RSM} : maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ $T_J = 175^\circ\text{C}$ mA
SD6000C..R	12	1200	1300	100
	16	1600	1700	
	20	2000	2100	
	24	2400	2500	

Forward Conduction

Parameter	SD6000C..R	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Heatsink temperature	6690 (3520)	A	180° conduction, half sine wave
	55 (85)	°C	Double side (single side) cooled
$I_{F(RMS)}$ Max. RMS forward current	11150	A	@ 25°C heatsink temperature double side cooled
I_{FSM} Max. peak, one-cycle forward, non-repetitive surge current	76400	A	t = 10ms No voltage reappplied
	80000		t = 8.3ms reappplied
	64250		t = 10ms 100% V_{RRM} reappplied
	67280		t = 8.3ms reappplied
I^2t Maximum I^2t for fusing	29200	KA ² s	t = 10ms No voltage reappplied
	26650		t = 8.3ms reappplied
	20640		t = 10ms 100% V_{RRM} reappplied
	18850		t = 8.3ms reappplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	292000	KA ² √s	t = 0.1 to 10ms, no voltage reappplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.727	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ max.
$V_{F(TO)2}$ High level value of threshold voltage	1.350		$(I > \pi \times I_{F(AV)})$, $T_J = T_J$ max.
r_{f1} Low level value of forward slope resistance	0.055	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ max.
r_{f2} High level value of forward slope resistance	0.027		$(I > \pi \times I_{F(AV)})$, $T_J = T_J$ max.
V_{FM} Max. forward voltage drop	1.22	V	$I_{pk} = 9000\text{A}$, $T_J = T_J$ max, $t_p = 10\text{ms}$ sinusoidal wave

Thermal and Mechanical Specifications

Parameter	SD600C..R	Units	Conditions
T _J Max. junction operating temperature range	-40 to 175	°C	
T _{stg} Max. storage temperature range	-55 to 200		
R _{thJ-hs} Max. thermal resistance, junction to heatsink	0.02 0.01	K/W	DC operation single side cooled DC operation double side cooled
F Mounting force, ± 10%	39200 (4000)	N (Kg)	
wt Approximate weight	1590	g	
Case style	B-44 (R-PUK)		See Outline Table

ΔR_{thJ-hs} Conduction

(The following table shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.0009	0.0010	0.0006	0.0006	K/W	T _J = T _J max.
120°	0.0010	0.0011	0.0010	0.0010		
90°	0.0013	0.0013	0.0014	0.0014		
60°	0.0019	0.0019	0.0020	0.0020		
30°	0.0033	0.0033	0.0034	0.0034		

Ordering Information Table

Device Code	<table border="1" style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 5px;">SD</td> <td style="padding: 5px;">600</td> <td style="padding: 5px;">0</td> <td style="padding: 5px;">C</td> <td style="padding: 5px;">24</td> <td style="padding: 5px;">R</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> </tr> </table>	SD	600	0	C	24	R	①	②	③	④	⑤	⑥
SD	600	0	C	24	R								
①	②	③	④	⑤	⑥								
<table style="border: none;"> <tr> <td style="padding-right: 5px;">1</td> <td>- Diode</td> </tr> <tr> <td style="padding-right: 5px;">2</td> <td>- Essential part number</td> </tr> <tr> <td style="padding-right: 5px;">3</td> <td>- 0 = Standard recovery</td> </tr> <tr> <td style="padding-right: 5px;">4</td> <td>- C = Ceramic Puk</td> </tr> <tr> <td style="padding-right: 5px;">5</td> <td>- Voltage code: code x 100 = V_{RRM} (see Voltage Ratings Table)</td> </tr> <tr> <td style="padding-right: 5px;">6</td> <td>- R = Puk Case B-44 (R-PUK)</td> </tr> </table>	1	- Diode	2	- Essential part number	3	- 0 = Standard recovery	4	- C = Ceramic Puk	5	- Voltage code: code x 100 = V _{RRM} (see Voltage Ratings Table)	6	- R = Puk Case B-44 (R-PUK)	
1	- Diode												
2	- Essential part number												
3	- 0 = Standard recovery												
4	- C = Ceramic Puk												
5	- Voltage code: code x 100 = V _{RRM} (see Voltage Ratings Table)												
6	- R = Puk Case B-44 (R-PUK)												

SD6000C..R Series

Bulletin I2035 rev. B 04/00

International
IRF Rectifier

Outline Table

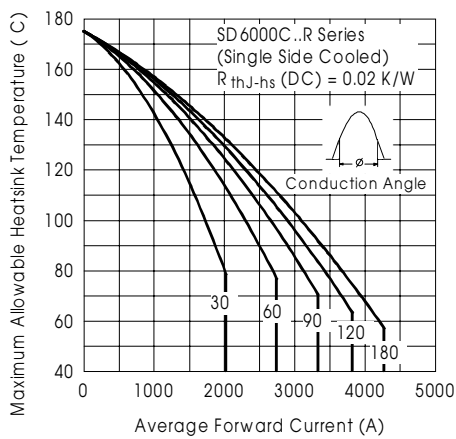
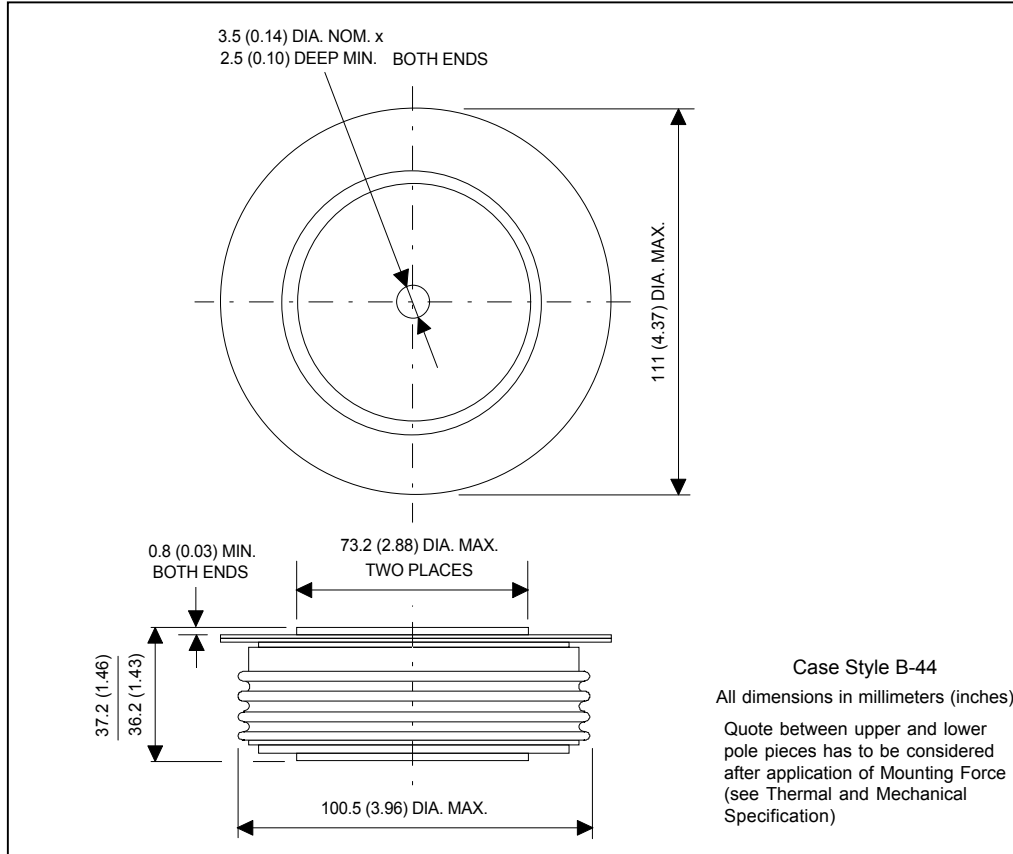


Fig. 1 - Current Ratings Characteristics

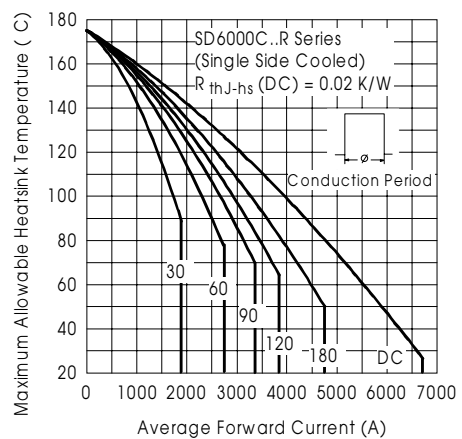


Fig. 2 - Current Ratings Characteristics

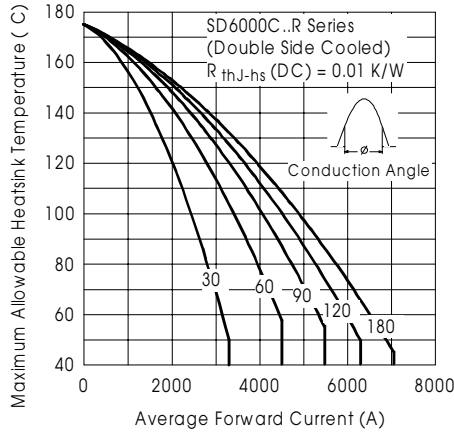


Fig. 3 - Current Ratings Characteristics

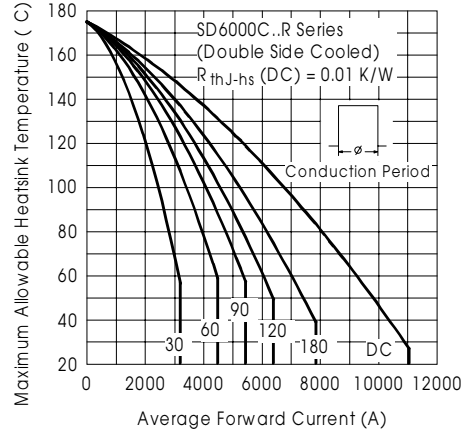


Fig. 4 - Current Ratings Characteristics

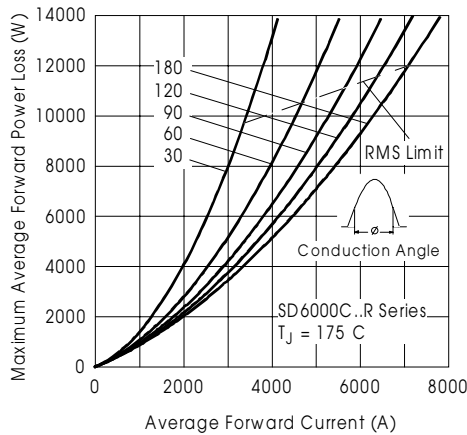


Fig. 5 - Forward Power Loss Characteristics

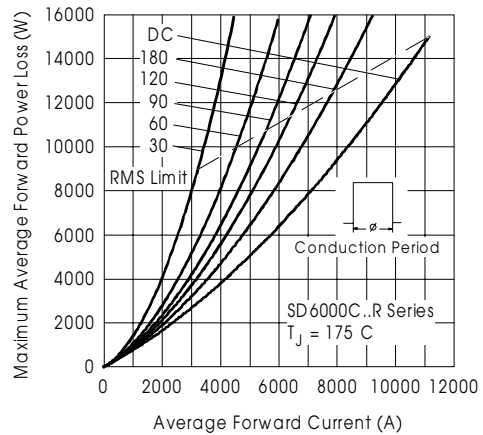


Fig. 6 - Forward Power Loss Characteristics

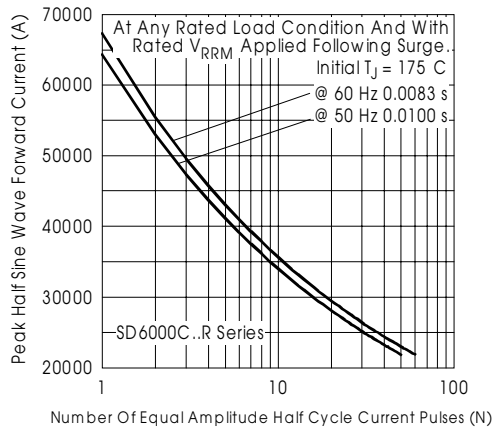


Fig. 7 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

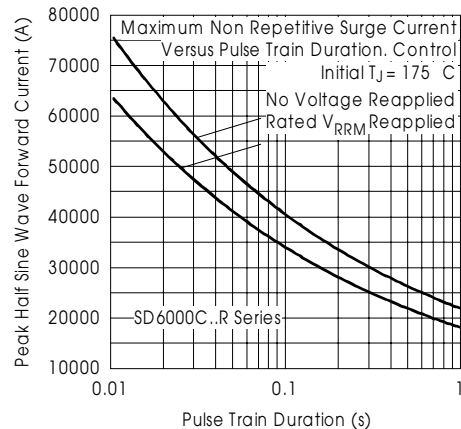


Fig. 8 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

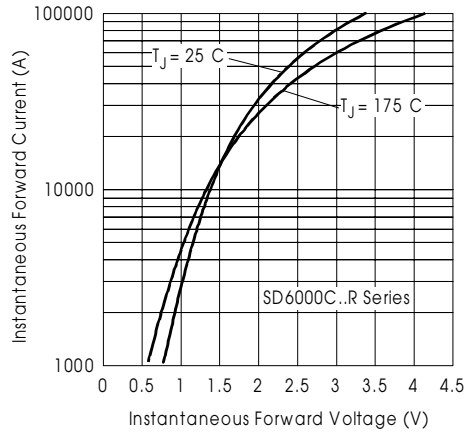


Fig. 9 - Forward Voltage Drop Characteristics

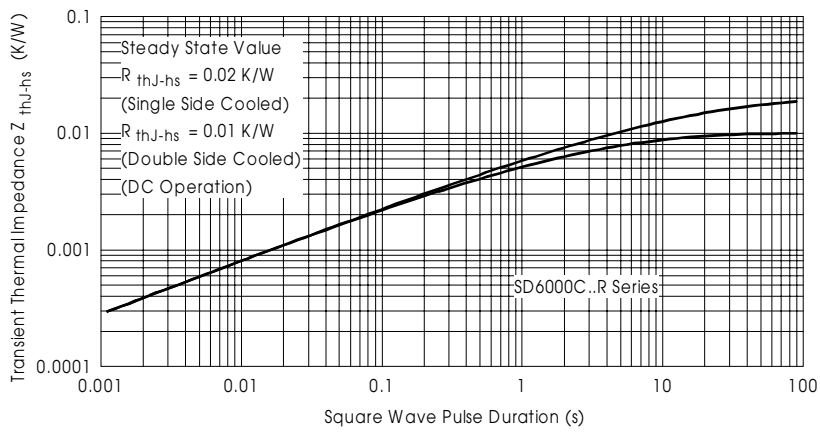


Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics