

### STANDARD RECOVERY DIODES

### Stud Version

#### Features

- Wide current range
- High voltage ratings up to 3200V
- High surge current capabilities
- Stud cathode and stud anode version
- Standard JEDEC types


380A

#### Typical Applications

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

#### Major Ratings and Characteristics

Parameters	SD300N/R		Units
	04 to 20	25 to 32	
$I_{F(AV)}$	380	380	A
@ $T_C$	100	70	°C
$I_{F(RMS)}$	595	425	A
$I_{FSM}$ @ 50Hz	6050	6050	A
@ 60Hz	6335	6335	A
$I^2t$ @ 50Hz	183	183	KA <sup>2</sup> s
@ 60Hz	167	167	KA <sup>2</sup> s
$V_{RRM}$ range	400 to 2000	2500 to 3200	V
$T_J$	- 40 to 180	- 40 to 150	°C

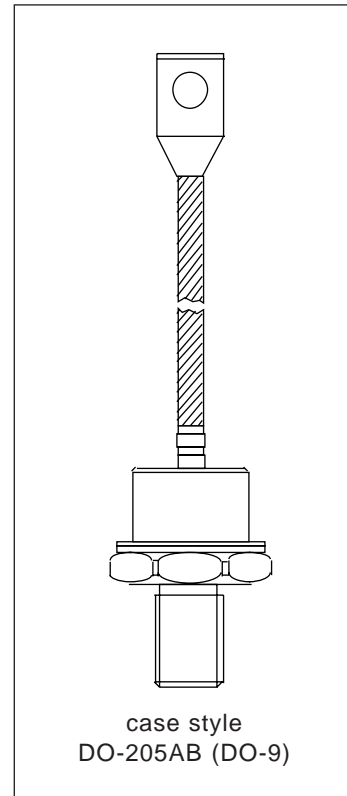

**ELECTRICAL SPECIFICATIONS**

## Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J = T_J$ max. mA
SD300N/R	04	400	500	15
	08	800	900	
	12	1200	1300	
	16	1600	1700	
	20	2000	2100	
	25	2500	2600	
	28	2800	2900	
	32	3200	3300	

## Forward Conduction

Parameter	SD300N/R		Units	Conditions		
	04 to 20	25 to 32				
$I_{F(AV)}$ Max. average forward current @ Case temperature	380	270	A	180° conduction, half sine wave		
	100	100	°C			
$I_{F(AV)}$ Max. average forward current @ Case temperature	300	380	A	180° conduction, half sine wave		
	125	70	°C			
$I_{F(RMS)}$ Max. RMS forward current	595	425	A	DC @ $T_C = 88^\circ\text{C}$ (02 to 24), $T_C = 91^\circ\text{C}$ (25 to 32)		
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	6050	6050	A	t = 10ms	No voltage	Sinusoidal half wave, Initial $T_J = T_J$ max.
	6335	6335		t = 8.3ms	reapplied	
	5090	5090		t = 10ms	100% $V_{RRM}$	
	5330	5330		t = 8.3ms	reapplied	
$I^2t$ Maximum $I^2t$ for fusing	183	183	KA <sup>2</sup> s	t = 10ms	No voltage	
	167	167		t = 8.3ms	reapplied	
	129	129		t = 10ms	100% $V_{RRM}$	
	118	118		t = 8.3ms	reapplied	
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	1830	1830	KA <sup>2</sup> /s	t = 0.1 to 10ms, no voltage reapplied		
$V_{F(TO)1}$ Low level value of threshold voltage	0.95	0.95	V	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), $T_J = T_J$ max.		
$V_{F(TO)2}$ High level value of threshold voltage	1.05	1.05		(I $> \pi \times I_{F(AV)}$ ), $T_J = T_J$ max.		
$r_{f1}$ Low level value of forward slope resistance	0.75	0.75	m $\Omega$	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), $T_J = T_J$ max.		
$r_{f2}$ High level value of forward slope resistance	0.66	0.66		(I $> \pi \times I_{F(AV)}$ ), $T_J = T_J$ max.		
$V_{FM}$ Max. forward voltage drop	1.83	1.83	V	$I_{pk} = 1180\text{A}$ , $T_J = T_J$ max, $t_p = 10\text{ms}$ sinusoidal wave		

**Thermal and Mechanical Specifications**

Parameter	SD300N/R		Units	Conditions
	04 to 20	25 to 32		
T <sub>J</sub> Max. junction operating temperature range	-40 to 180	-40 to 150	°C	
T <sub>stg</sub> Max. storage temperature range	-55 to 200	-55 to 200		
R <sub>thJC</sub> Max. thermal resistance, junction to case	0.11		K/W	DC operation
R <sub>thCS</sub> Max. thermal resistance, case to heatsink	0.04			Mounting surface, smooth, flat and greased
T Max. allowed mounting torque ±10%	27		Nm	Not lubricated threads
wt Approximate weight	250		g	
Case style	DO-205AB (DO-9)			See Outline Table

**ΔR<sub>thJC</sub> Conduction**

(The following table shows the increment of thermal resistance R<sub>thJC</sub> when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	04 to 20	25 to 32	04 to 20	25 to 32		
180°	0.019	0.019	0.013	0.013	K/W	T <sub>J</sub> = T <sub>J</sub> max.
120°	0.023	0.023	0.023	0.023		
90°	0.028	0.028	0.030	0.030		
60°	0.042	0.042	0.044	0.044		
30°	0.073	0.073	0.074	0.074		

**Ordering Information Table**

**Device Code**


SD	30	0	N	32	P	B	C
①	②	③	④	⑤	⑥	⑦	⑧

- 1** - Diode
- 2** - Essential part number
- 3** - 0 = Standard recovery
- 4** - N = Stud Normal Polarity (Cathode to Stud)  
R = Stud Reverse Polarity (Anode to Stud)
- 5** - Voltage code: Code x 100 = V<sub>RRM</sub> (See Voltage Ratings table)
- 6** - P = Stud base DO-205AB (DO-9) 3/4" 16UNF-2A  
M = Stud base DO-205AB (DO-9) M16 X 1.5
- 7** - B = Flag top terminal (for Cathode/ Anode Leads)  
S = Isolated lead with silicone sleeve  
(Red = Reverse Polarity; Blue = Normal Polarity)  
None = Non isolated lead
- 8** - C = Ceramic Housing (over 1600V)  
V = Glass-metal seal (only up to 1600V)


**SD300N/R Series**

Bulletin I2081 rev. A 08/94

Outline Table

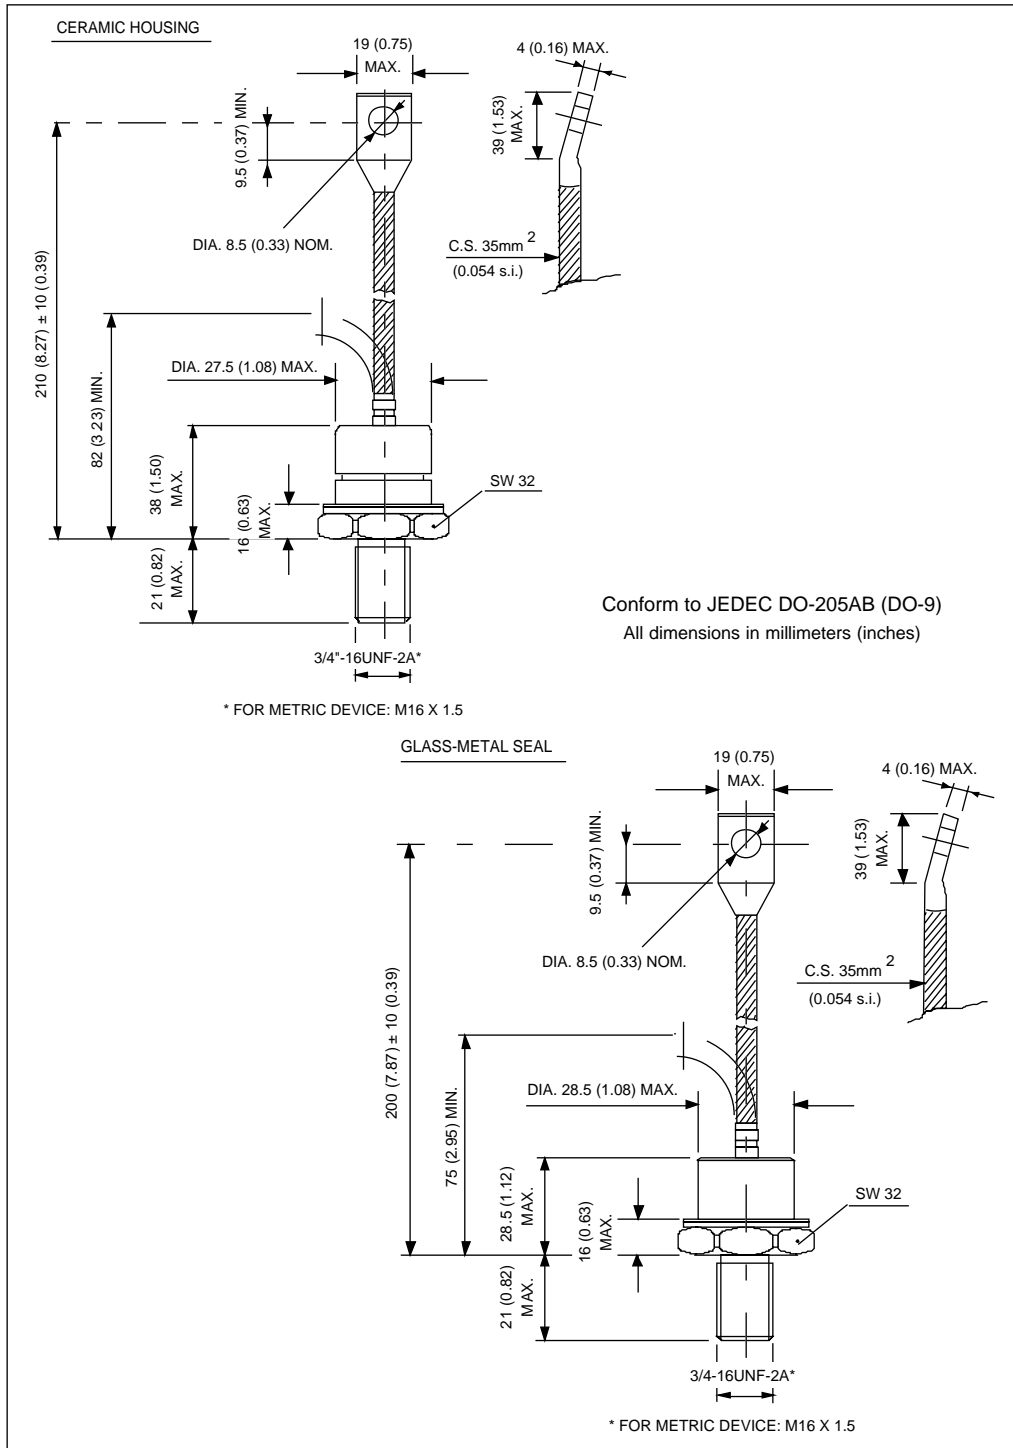

Outline Table

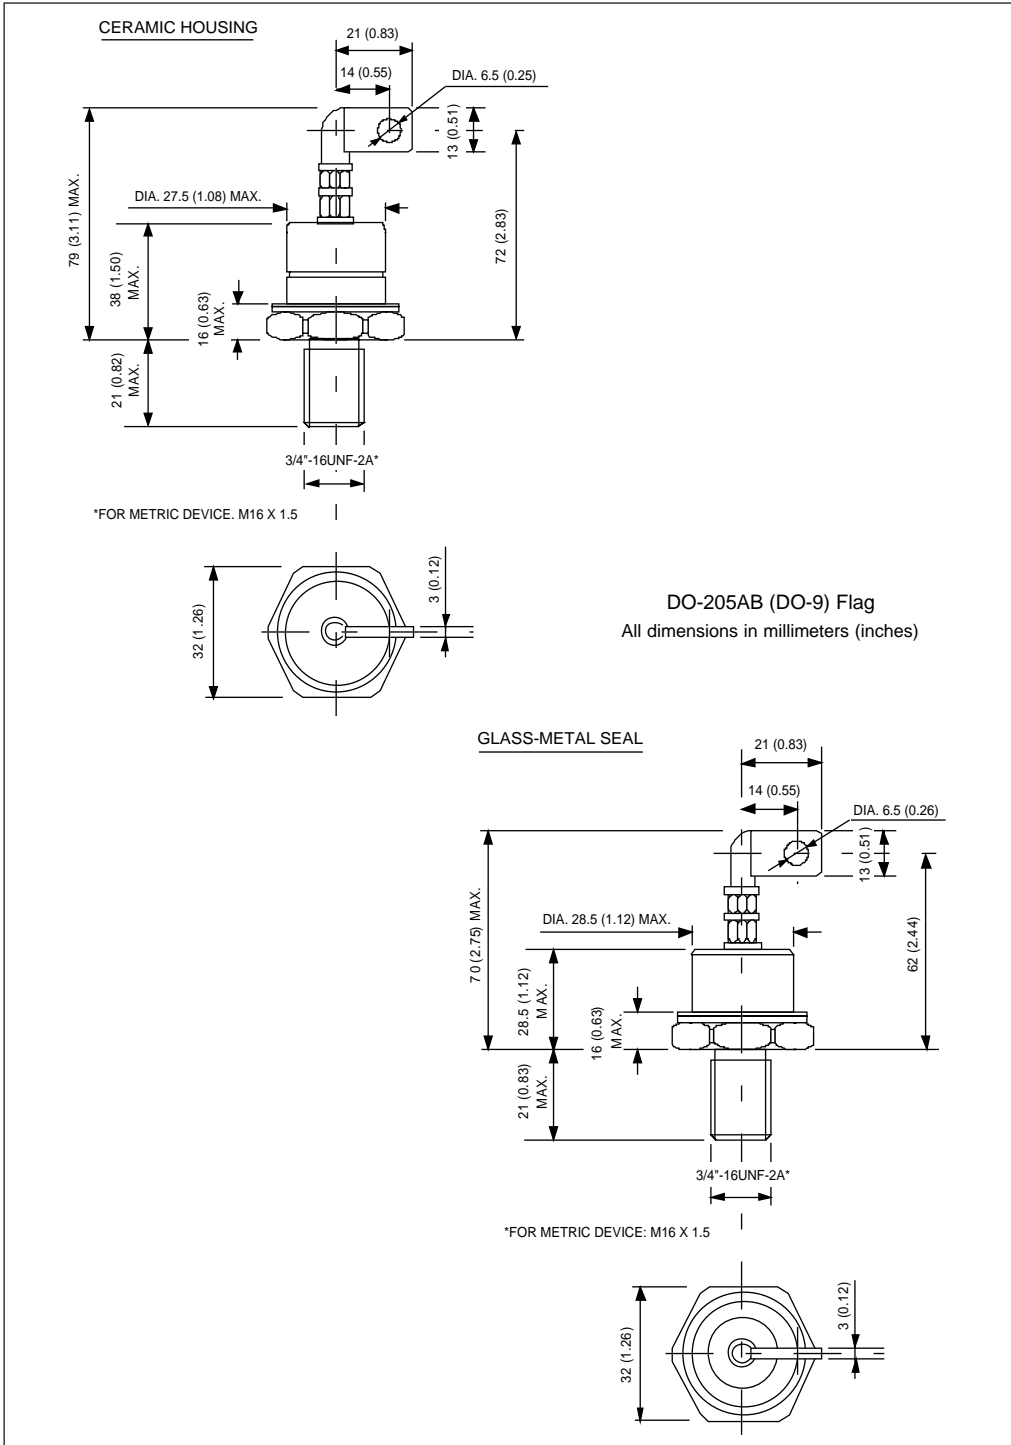

# SD300N/R Series

Bulletin I2081 rev. A 08/94

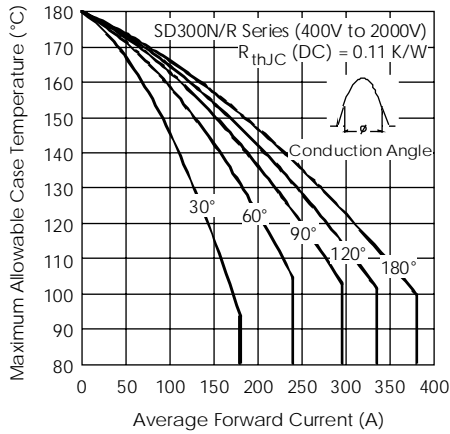


Fig. 1 - Current Ratings Characteristics

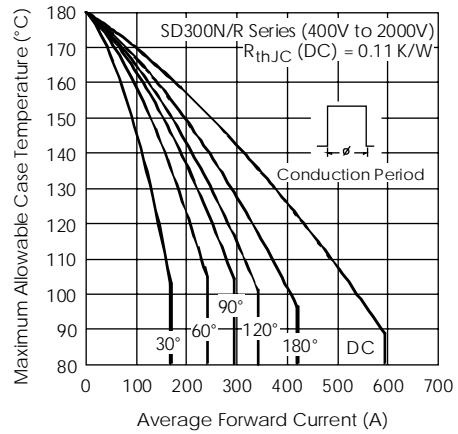


Fig. 2 - Current Ratings Characteristics

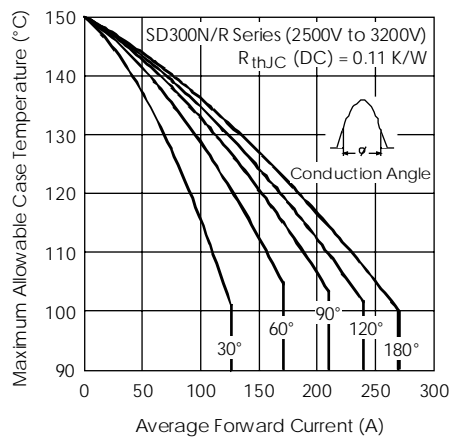


Fig. 3 - Current Ratings Characteristics

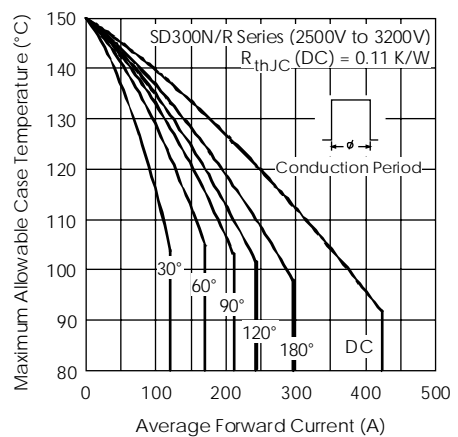


Fig. 4 - Current Ratings Characteristics

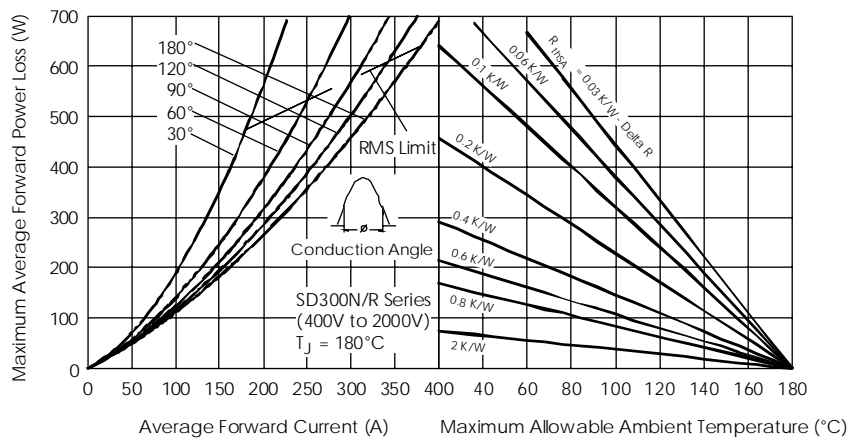


Fig. 5 - Forward Power Loss Characteristics

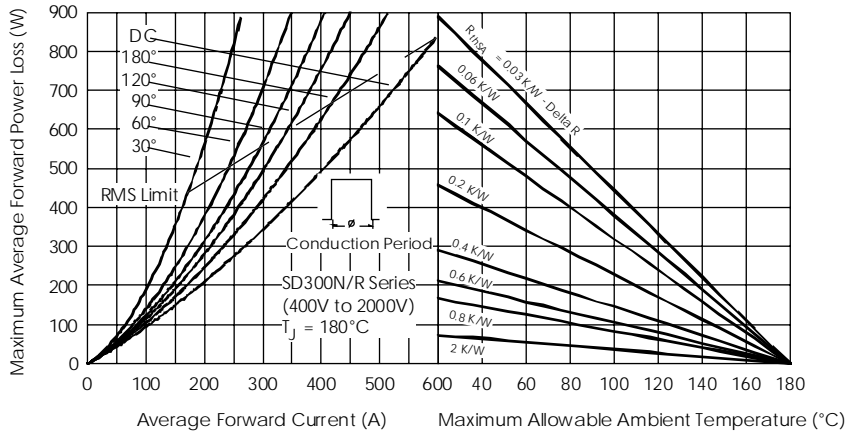


Fig. 6 - Forward Power Loss Characteristics

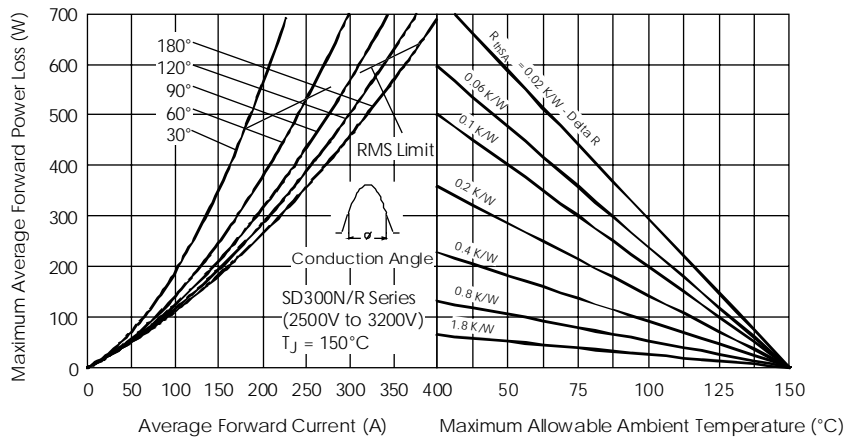


Fig. 7 - Forward Power Loss Characteristics

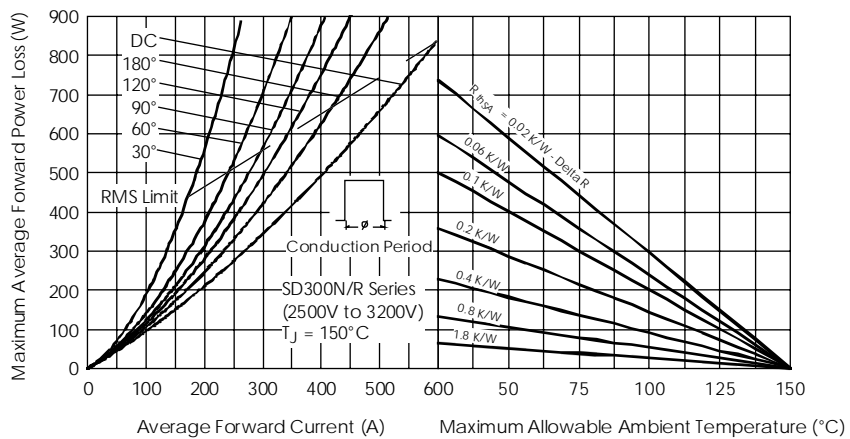


Fig. 8 - Forward Power Loss Characteristics

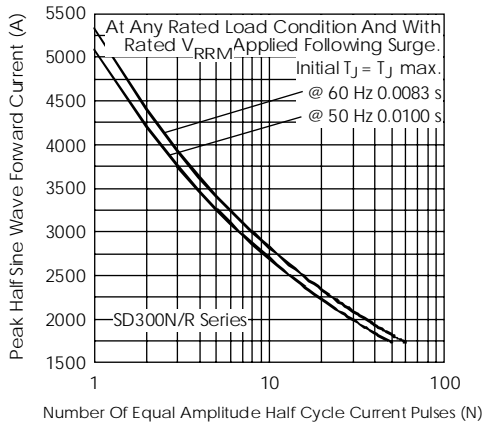


Fig. 9 - Maximum Non-Repetitive Surge Current

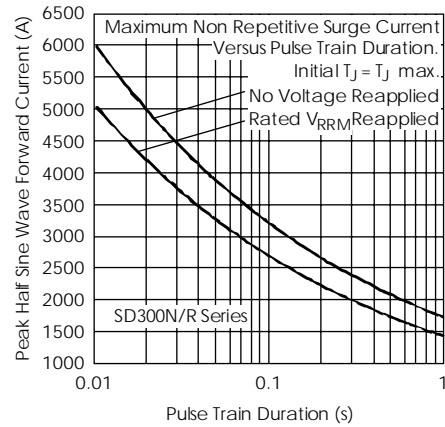


Fig. 10 - Maximum Non-Repetitive Surge Current

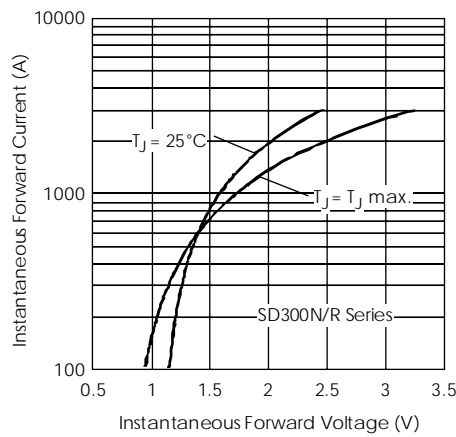


Fig. 11 - Forward Voltage Drop Characteristics

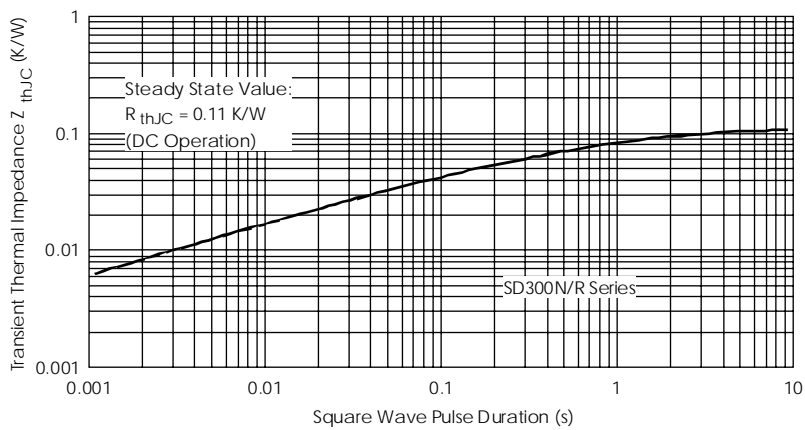


Fig. 12 - Thermal Impedance  $Z_{thJC}$  Characteristics