

Metal Film (Thin Film) Chip Resistors, High Reliability Type 0402, 0603, 0805, 1206

Type: **ERA 2A, 3A, 6A, 8A**

■ Features

- High reliabilityStable at high temperature and humidity
(85 °C 85 %RH rated load, Category temperature range : -55 to +155 °C)
- High accuracySmall resistance tolerance and Temperature Coefficient of Resistance
- High performance.....Low current noise, excellent linearity
- Reference Standard.....IEC 60115-8, JIS C 5201-8, EIAJ RC-2133B
- RoHS compliant

■ Packaging Methods

Please see Pages 40 to 43

■ Recommended Land Pattern

Please see Pages 44 to 45

■ Recommended Soldering Conditions


Please see Page 46

■ Safety Precautions


Please see Page 47

■ Explanation of Part Numbers


● E24 Series

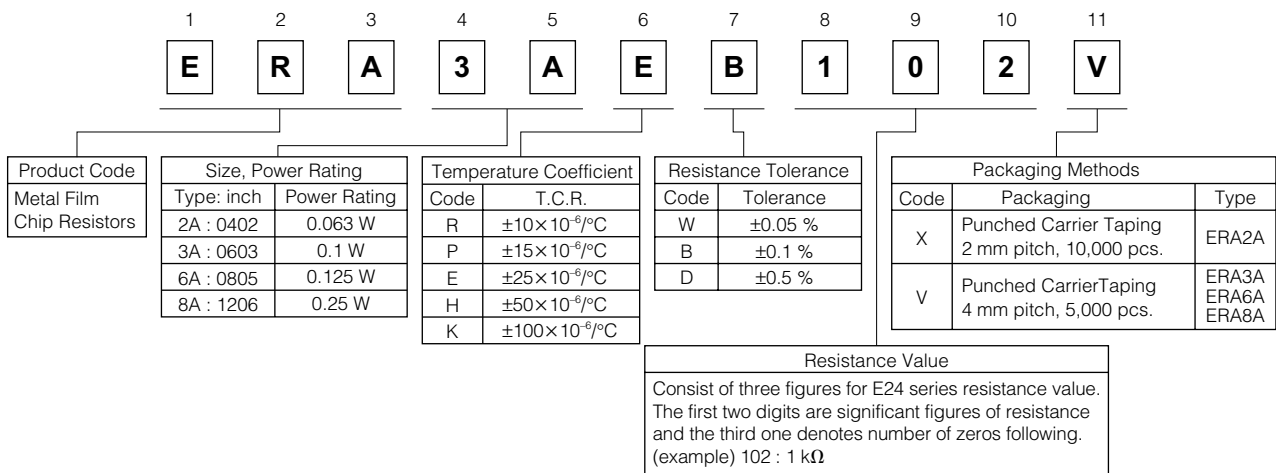


● E96 Series

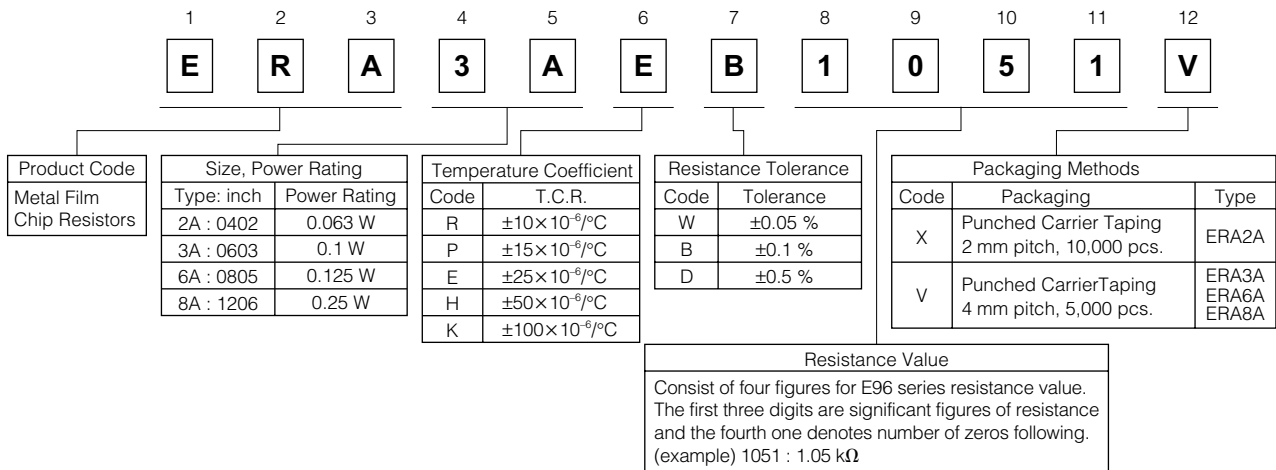

Construction

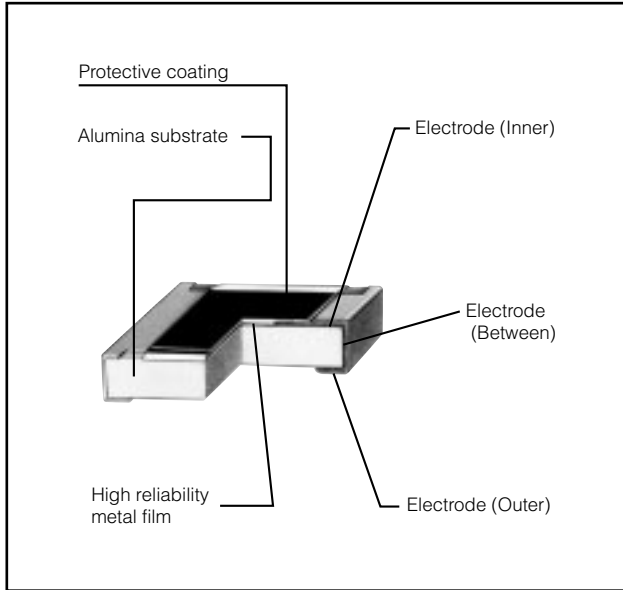

Dimensions in mm (not to scale)

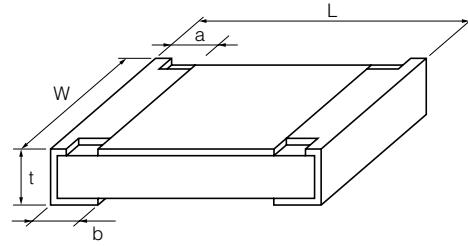

Type (inch size)	Dimensions (mm)					Mass (Weight) [g/1000pcs.]
	L	W	a	b	t	
ERA2A (0402)	1.00 ^{+0.10}	0.50 ^{+0.10/-0.05}	0.15 ^{+0.10}	0.25 ^{+0.10}	0.35 ^{+0.05}	0.6
ERA3A (0603)	1.60 ^{+0.20}	0.80 ^{+0.20}	0.30 ^{+0.20}	0.30 ^{+0.20}	0.45 ^{+0.10}	2
ERA6A (0805)	2.00 ^{+0.20}	1.25 ^{+0.10}	0.40 ^{+0.25}	0.40 ^{+0.25}	0.50 ^{+0.10}	4
ERA8A (1206)	3.20 ^{+0.20}	1.60 ^{+0.05/-0.15}	0.50 ^{+0.25}	0.50 ^{+0.25}	0.60 ^{+0.10}	8

Ratings

Type (inch size)	Power Rating at 85 °C (W)	Limiting Element Voltage ⁽¹⁾ (V)	Maximum Overload Voltage ⁽²⁾ (V)	Type (detail)	Resistance Tolerance (%)	T.C.R. (×10 ⁻⁶ /°C)	Resistance Range ⁽³⁾ (Ω)	Category Temperature Range (°C)
ERA2A (0402)	0.063	25	50	ERA2AKD	±0.5	±100	10 to 46.4 (E24, E96)	-55 to +155
				ERA2AED	±0.5		±25	
				ERA2AEB	±0.1			
ERA3A (0603)	0.1	75	150	ERA3AHD	±0.5	±50	10 to 46.4 (E24, E96)	
				ERA3AED	±0.5		±25	
				ERA3AEB	±0.1	±15	470 to 100 k (E24, E96)	
				ERA3APB	±0.1		1 k to 100 k (E24, E96)	
				ERA3ARB	±0.1	±10	1 k to 100 k (E24, E96)	
				ERA3ARW	±0.05			
ERA6A (0805)	0.125	100	200	ERA6AHD	±0.5	±50	10 to 46.4 (E24, E96)	
				ERA6AED	±0.5		±25	
				ERA6AEB	±0.1	±15	470 to 100 k (E24, E96)	
				ERA6APB	±0.1		1 k to 100 k (E24, E96)	
				ERA6ARB	±0.1	±10	1 k to 100 k (E24, E96)	
				ERA6ARW	±0.05			
ERA8A (1206)	0.25	150	300	ERA8AHD	±0.5	±50	10 to 46.4 (E24, E96)	
				ERA8AED	±0.5		±25	47 to 1 M (E24, E96)
				ERA8AEB	±0.1	±15	470 to 100 k (E24, E96)	
				ERA8APB	±0.1		1 k to 100 k (E24, E96)	
				ERA8ARB	±0.1	±10	1 k to 100 k (E24, E96)	
				ERA8ARW	±0.05			


(1) Rated Continuous Working Voltage (RCWV) shall be determined from $RCWV = \sqrt{\text{Rated Power} \times \text{Resistance Values}}$, or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from $SOTV = 2.5 \times \text{Power Rating}$ or max. Overload Voltage listed above whichever less.

(3) E192 series resistance values are also available. Please contact us for details.

Power Derating Curve

For resistors operated in ambient temperatures above 85 °C, power rating shall be derated in accordance with the figure on the right.

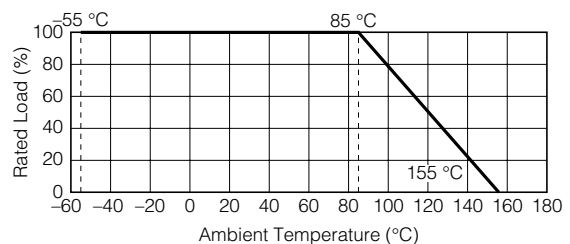

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[ERA-6AEB105V](#) [ERA-6AEB5763V](#) [ERA-2AED101X](#) [ERA-2AED102X](#) [ERA-2AED103X](#) [ERA-2AED104X](#) [ERA-2AED111X](#) [ERA-2AED151X](#) [ERA-2AED222X](#) [ERA-2AED223X](#) [ERA-2AED331X](#) [ERA-2AED332X](#) [ERA-2AED392X](#) [ERA-2AED472X](#) [ERA-2AED563X](#) [ERA-2AED680X](#) [ERA-2AED682X](#) [ERA-3AEB111V](#) [ERA-3AEB121V](#) [ERA-3AEB124V](#) [ERA-3AEB131V](#) [ERA-3AEB1581V](#) [ERA-3AEB161V](#) [ERA-3AEB164V](#) [ERA-3AEB184V](#) [ERA-3AEB2102V](#) [ERA-3AEB2491V](#) [ERA-3AEB274V](#) [ERA-3AEB361V](#) [ERA-3AEB362V](#) [ERA-3AEB3921V](#) [ERA-3AEB431V](#) [ERA-3AEB432V](#) [ERA-3AEB560V](#) [ERA-3AEB561V](#) [ERA-3AEB620V](#) [ERA-3AEB621V](#) [ERA-3AEB7322V](#) [ERA-3AEB751V](#) [ERA-3AEB820V](#) [ERA-3AEB821V](#) [ERA-3AEB911V](#) [ERA-3AEB912V](#) [ERA-3AEB913V](#) [ERA-3AED2213V](#) [ERA-3AED3571V](#) [ERA-3AED4531V](#) [ERA-3AED6042V](#) [ERA-6AEB112V](#) [ERA-6AEB114V](#) [ERA-6AEB121V](#) [ERA-6AEB131V](#) [ERA-6AEB132V](#) [ERA-6AEB134V](#) [ERA-6AEB161V](#) [ERA-6AEB163V](#) [ERA-6AEB164V](#) [ERA-6AEB181V](#) [ERA-6AEB184V](#) [ERA-6AEB204V](#) [ERA-6AEB244V](#) [ERA-6AEB271V](#) [ERA-6AEB274V](#) [ERA-6AEB304V](#) [ERA-6AEB363V](#) [ERA-6AEB394V](#) [ERA-6AEB431V](#) [ERA-6AEB434V](#) [ERA-6AEB510V](#) [ERA-6AEB514V](#) [ERA-6AEB560V](#) [ERA-6AEB563V](#) [ERA-6AEB564V](#) [ERA-6AEB620V](#) [ERA-6AEB753V](#) [ERA-6AEB754V](#) [ERA-6AEB820V](#) [ERA-6AEB824V](#) [ERA-6AEB910V](#) [ERA-6AEB914V](#) [ERA-2AEB49R9X](#) [ERA-3AEB1003V](#) [ERA-3AEB1103V](#) [ERA-3AEB1503V](#) [ERA-3AEB3323V](#) [ERA-3AED3652V](#) [ERA-3AED6491V](#) [ERA-3AHD16R5V](#) [ERA-3AHD24R9V](#) [ERA-3AED222V](#) [ERA-8AED223V](#) [ERA-3AED123V](#) [ERA-3AED243V](#) [ERA-3AED332V](#) [ERA-3AED512V](#) [ERA-3AED8660V](#) [ERA-3APB102V](#) [ERA-3APB103V](#) [ERA-3APB104V](#) [ERA-3APB112V](#)