


2x5mm RECTANGULAR LED LAMPS

FEATURES

- All plastic mold type.
- Low drive current.
- High intensity light emission.

T-41-23

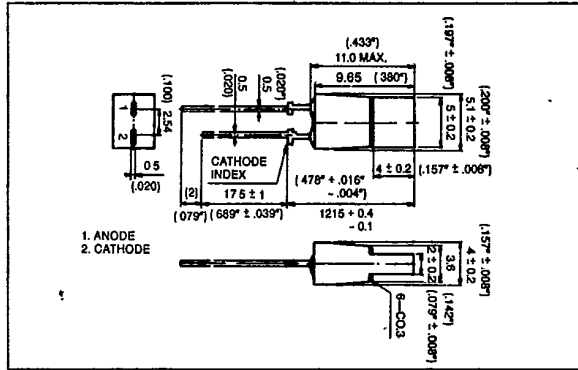

MAXIMUM RATINGS (Ta = 25°C)

PART NO.	FORWARD CURRENT (IF) (mA)	REVERSE VOLTAGE (VR) (V)	POWER DISSIPATION (PD) (mW)	OPERATING TEMPERATURE (Topr) (°C)	STORAGE TEMPERATURE (Tstg) (°C)
MT208-R	20	4	56	-20 ~ 75	-30 ~ 100
MT208-G	25	4	70	-20 ~ 75	-30 ~ 100
MT208-Y	25	4	70	-20 ~ 75	-30 ~ 100
MT208-O	25	4	70	-20 ~ 75	-30 ~ 100
MT208-HR	25	4	70	-20 ~ 75	-30 ~ 100

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

PART NO.	MATERIAL	LENS COLOR	SURFACE SIZE	LUMINOUS INTENSITY (mcd)			FORWARD VOLTAGE (V)			REVERSE CURRENT		PEAK WAVELENGTH (nm)	SPEC. LINE HALF WIDTH (nm)
				min.	typ.	@mA	typ.	max.	@ mA	µA	Vr		
MT208-R	GaP/GaP	Red/Diff	2x5	.3	.5	15	2.1	2.8	20	5	4	700	100
MT208-G	GaP/GaP	Green/Diff	2x5	.5	1.2	15	2.1	2.8	20	5	4	565	25
MT208-Y	GaAsP/GaP	Yellow/Diff	2x5	.4	.9	15	2.1	2.8	20	100	4	585	32
MT208-O	GaAsP/GaP	Orange/Diff	2x5	.5	1.0	15	2.1	2.8	20	100	4	610	35
MT208-HR	GaAsP/GaP	Red/Diff	2x5	.5	1.2	15	2.1	2.8	20	100	4	635	40