



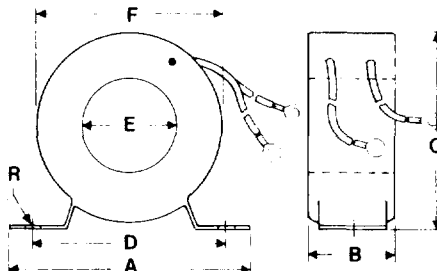

SERIES CT CURRENT TRANSFORMERS INDOOR, TOROIDAL



Features:


- Supplied with 24" insulated secondary leads terminated with crimped ring connectors
- Suitable for use with bare (uninsulated) primary conductor in circuits up to 600V (4KV Hi pot); or at higher voltages when a suitably insulated conductor is used.
- All units have 5 A secondary for use with standard AC ammeters with 5A movement.
- Two hole mtg. bracket on all models.

Current ratio (Pri-to-Sec) is determined by numeric portion of part number to 5. EX: CT50 is 50 to 5 ratio.


Mfr. No.	Accuracy %	Burden VA	Center Dimensions (In.)						Mtg. Slot* (In.)	Price Each
			A	B	C	D	E	F		
CT50	3.2	2	3.75	1.75	3.25	3.00	0.87	2.87	A	\$ 35.95
CT60	2.4	2	3.75	1.75	3.25	3.00	0.87	2.87	A	37.01
CT75	2.0	2	3.75	1.75	3.25	3.00	0.87	2.87	A	38.07
CT100	2.0	2	3.75	1.75	3.25	3.00	1.20	2.87	A	39.75
CT150	1.2	2	3.75	1.75	3.25	3.00	1.20	2.87	A	39.75
CT200	1.2	2	4.75	1.75	4.25	4.00	2.20	3.87	A	42.93
CT250	0.6 1.2	2 5	4.75	1.75	4.25	4.00	2.20	3.87	A	43.73
CT300	0.6 1.2	2 10	4.75	1.75	4.25	4.00	2.20	3.87	A	60.51
CT400	0.6 1.2	2 10	4.75	1.75	4.25	4.00	2.20	3.87	A	63.78
CT500	0.3 1.2	2 20	4.75	1.75	4.25	4.00	2.20	3.87	A	66.60
CT600	0.3 1.2	2 20	6.00	1.75	5.25	5.25	3.50	5.12	B	69.87
CT800	0.3 1.2	5 50	6.00	1.75	5.25	5.25	3.50	5.12	B	85.07
CT1000	0.3 1.2	5 50	7.00	1.75	6.25	6.25	4.50	6.12	B	96.90
CT1200	0.3 1.2	10 50	8.00	1.75	7.25	7.25	5.50	7.12	B	108.03

* Mtg. Slots: A = .22 x .37, B = .28 x .37.


SERIES CL CURRENT TRANSFORMERS INDOOR, CORE/COIL



CL-B



CL-D



Features:

- 50/60 Hz.
- 600 V insulated with 5 A secondaries.
- CL-B series will not exceed 2% ratio error at 5 VA burden.
- CL-D series will not exceed 0.6% ratio error at 2 VA, 1.2% ratio error at 10 VA, and 2% at 25 VA burden. The CL-D have a metering accuracy of 0.6 BO .2 and 1.2 BO .5, but are not approved for revenue metering.
- Rugged open core and coil designs are suitable for mounting in ventilated enclosures.
- Standard screw terminal lugs.

Current ratio (Pri-to-Sec) is determined by numeric portion of part number to 5. EX: CL1B is 1 to 5 ratio.

Mfr. No.	Accuracy %	Burden VA	Overall Dimen. (In.)			Mounting Ctrs (In.)			F (In.)	Price Each
			A	B	C	D	E			
CL1B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		\$40.81
CL2B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		40.81
CL5B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		40.81
CL10B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		40.81
CL15B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		40.81
CL20B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		40.81
CL25B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		40.81
CL50B	2	5	3.00	3.25	2.56	2.50	2.50	3.13		40.81
CL1D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL2D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL5D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL10D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL15D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL20D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL25D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL50D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL75D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL100D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51
CL150D	0.6	2	3.75	4.00	3.13	3.13	2.38	3.13		63.51

Mtg. Slot: .22" x .44"