

3.1/2 DIGIT SINGLE CHIP A/D CONVERTER WITH DISPLAY HOLD


■ GENERAL DESCRIPTION

The NJU9203B/9204B are low-power-consumption, high-performance 3-1/2 digit single chip A/D converters with display hold containing a voltage reference, oscillator, 3-1/2 digits A/D converter, 7-segment decoder, display driver and control circuits.


The NJU9203B is designed for direct LCD driving and the NJU9204B for LED direct driving.

The NJU9203B/9204B can be operated on simple application circuits as they require only few external components, therefore they are most suited for digital multimeter, digital thermometer and other likes.

■ PACKAGE OUTLINE



NJU9203BD/9204BD





NJU9203BM/9204BM

■ FEATURES

- Display Hold Function
- Guaranteed 0 reading for 0 input on all scales
- Polarity detection at 0 point
using a high-accuracy null-detection
- Low Input Current -- 1pA typ.
- True differential input and reference
- Display device direct driving
NJU9203B -- LCD
NJU9204B -- LED
- Reference and Oscillation Circuits incorporated
- Low power consumption
- No external active components required
- Package Outline -- DIP 40 /DMP 42
- C-MOS Technology

■ PIN CONFIGURATION

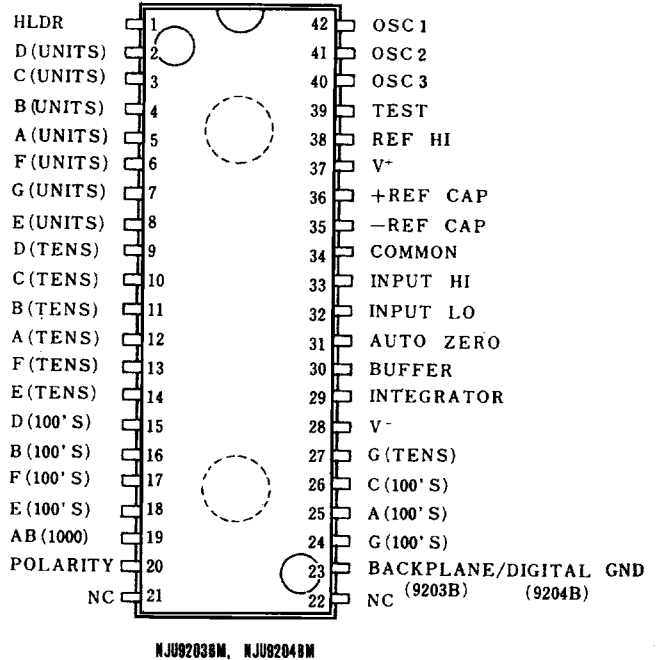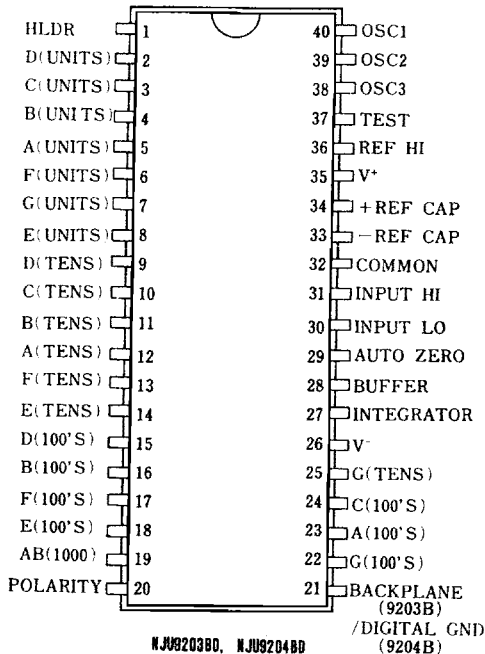

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	DEVICE	SYMBOL	RATINGS	UNIT
Supply Voltage	9203B Only	$V^+ - V^-$	15	V
	9204B Only	V^+	+6	
	9204B Only	V^-	-9	
Analog Input Voltage	9203B/9204B	V_{IN}	$V^+ \sim V^-$	V
Reference Input Voltage	9203B/9204B	Vref	$V^+ \sim V^-$	V
Clock Input	9203B Only	V_{CLK}	Test $\sim V^+$	V
	9204B Only		GND $\sim V^+$	
Power Dissipation	9203B/9204B	P_D	300 / 800	mW
Operating Temperature Range	9203B/9204B	T_{OPR}	0 \sim +75	°C
Storage Temperature Range	9203B/9204B	T_{STG}	-40 \sim +125	°C

 Note 1) The input current is limit by $\pm 100\mu A$ when the input voltage is over supply voltage.

■ ELECTRICAL CHARACTERISTICS

 (Ta=25°C, $V_{DD}=5V$, $V_{REFIN}=10V$, $V_{OUT2}=GND$)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Zero Input Reading	No	$V_{IN}=0.0V$, FS=200.0mV	-000.0	± 000.0	+000.0	Counts
Ratiometric Reading	N1000	$V_{IN}=V_{ref}$, $V_{ref}=100mV$	999	999/1000	1000	
Rollover Error	Err	$-V_{IN}=+V_{IN}-200.0mV$	-1	± 0.5	+1	Counts
Linearity	Lin	Full Scale=200mV	-1	± 0.5	+1	Counts
Common Mode Rejection Ratio	C_{MRR}	$V_{cm}=\pm 1V$, $V_{IN}=0V$, Full Scale=200.0mV		50		$\mu V/V$
Noise(P-P Value)	V_{NI}	$V_{IN}=0V$, FS=200.0mV		30		μV
Leakage Current	I_L	$V_{IN}=0V$	1		10	pA
Zero Reading Drift	Z_D	$V_{IN}=0V$, $0 < T_a < 75^\circ C$		0.2	1	$\mu V/^\circ C$
Scale Factor Temp. Coeff.	Ftemp	$V_{IN}=199.0mV$, $0 < T_a < 75^\circ C$		1	5	ppm/°C
Operating Current	I_{DD}	$V_{IN}=0V$, No Load		0.8	1.8	mA
Analog Common Voltage		25k Ω Between Common and Positive Supply	2.4	3.0	3.2	V
Temp. Coeff.of Analog Common					80	
Seg. Drive Voltage (9203B)		$V_{DD}=9V$	4	5	6	V
BackPlane Drive Volt.(9203B)		$V_{DD}=9V$	4	5	6	
Seg. Sinking Current (9204B)		$V_{DD}=5V$, Seg.V=3V	Except Term.19 Term.19 only	5.0	8.0	mA
Seg. Sinking Current (9204B)						


Note 2) Differential read out value of positive and negative voltage input.

3) Error from the input-output linear characteristics getting from positive and negative full-scale input read out.

4) The peak value of noise must be not over 95% period in the measurement time.

■ APPLICATION CIRCUITS

NJU9203B

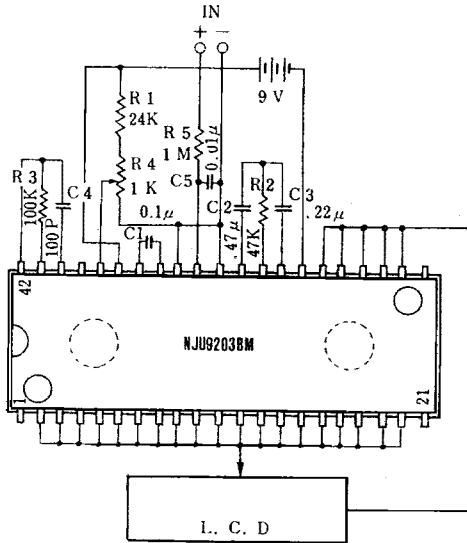

NJU9204B

