

IR2170

OVER CURRENT SENSING IC

Features

- Floating channel up to +600V
- Monolithic integration
- Overcurrent sensing through shunt resistor
- Low IQBS allows the boot strap power supply
- Independent fast overcurrent trip signal
- High common mode noise immunity
- Input overvoltage protection for IGBT short circuit condition
- Open Drain outputs


Description

IR2170 is the monolithic over current sensing IC designed for motor drive applications. It senses the motor phase current through an external shunt resistor, detects overcurrent condition, and transfers the signal to the low side. IR's proprietary high voltage isolation technology is implemented to enable the high bandwidth signal processing. The dedicated overcurrent trip (\overline{OC}) signal facilitates IGBT short circuit protection. The \overline{OC} output pulse width can be programmed by the external resistor and capacitor. The open-drain outputs make easy for any interface from 3.3V to 15V.


Product Summary

V_{OFFSET}	600Vmax
I_{QBS}	1mA
Overcurrent trip signal delay	1.5usec (typ)
Overcurrent trip level	+/-260mV (typ.)

Packages

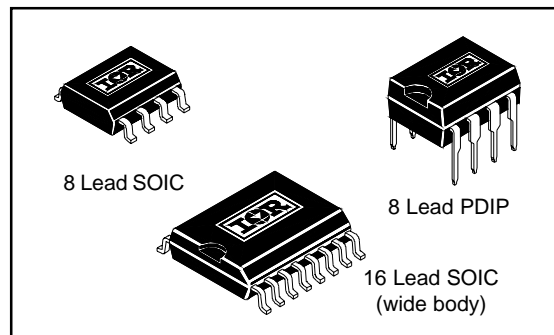

Block Diagram

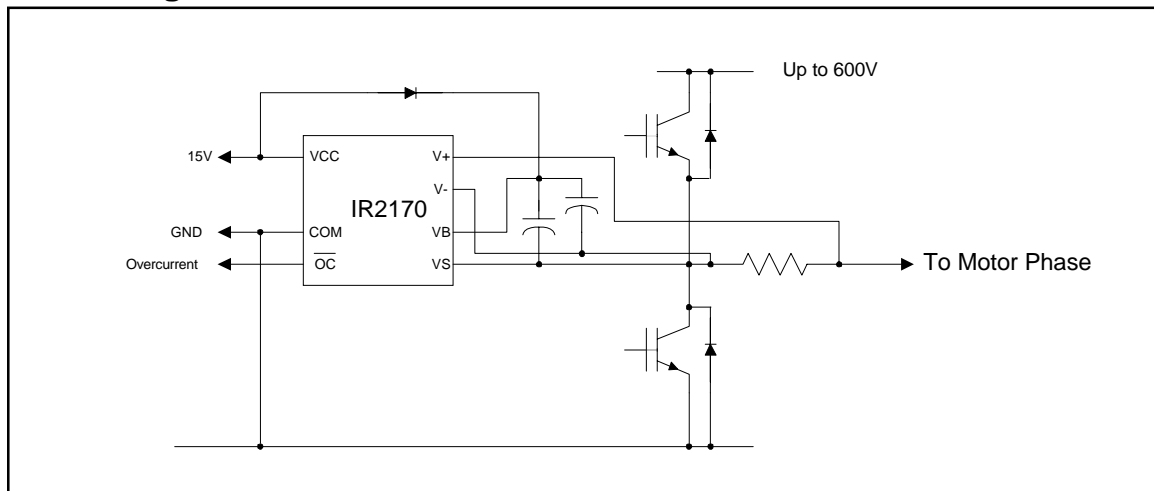

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM, all currents are defined positive into any lead. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units	
V_S	High side offset voltage	-0.3	600	V	
V_{BS}	High side floating supply voltage	-0.3	25		
V_{CC}	Low side and logic fixed supply voltage	-0.3	25		
V_{IN}	Maximum input voltage between V_{IN+} and V_{IN-}	-5	5		
V_{OC}	Overcurrent output voltage	COM -0.3	VCC +0.3		
V_{IN-}	V_{IN-} input voltage (note 1)	$V_S - 5$	$V_{B+} + 0.3$		
dV/dt	Allowable offset voltage slew rate	—	50	V/ns	
P_D	Package power dissipation @ $T_A \leq +25^\circ\text{C}$	8 lead SOIC	—	.625	W
		8 lead PDIP	—	1.0	
		16 lead SOIC	—	1.25	
R_{thJA}	Thermal resistance, junction to ambient	8 lead SOIC	—	200	$^\circ\text{C/W}$
		8 lead PDIP	—	125	
		16 lead SOIC	—	100	
T_J	Junction temperature	—	150	$^\circ\text{C}$	
T_S	Storage temperature	-55	150		
T_L	Lead temperature (soldering, 10 seconds)	—	300		

Note 1: Capacitors are required between V_B and V_{in-} , and between V_B and V_S pins when bootstrap power is used. The external power supply, when used, is required between V_S and V_{in-} , and between V_B and V_S pins.

Recommended Operating Conditions

The output logic timing diagram is shown in figure 1. For proper operation the device should be used within the recommended conditions.

Symbol	Definition	Min.	Max.	Units
V_B	High side floating supply voltage	$V_S + 13.0$	$V_S + 20$	V
V_S	High side floating supply offset voltage	note 2	600	
V_{OC}	Overcurrent output voltage	COM	VCC	
V_{CC}	Low side and logic fixed supply voltage	9.5	20	
V_{IN}	Input voltage between V_{IN+} and V_{IN-}	-260	+260	mV
T_A	Ambient temperature	-40	125	$^\circ\text{C}$

Note 2: Logic operation for V_S of -5 to +600V. Logic state held for V_S of -5V to $-V_{BS}$.

DC Electrical Characteristics

$V_{CC} = V_{BS} = 15V$, unless otherwise specified.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
V_{OC+}	Overcurrent trip positive input voltage	—	260	—	mV	
V_{OC-}	Overcurrent trip negative input voltage	—	-260	—		
I_{LK}	Offset supply leakage current	—	—	50	μA	$V_B = V_S = 600V$
I_{QBS}	Quiescent V_{BS} supply current	—	1	2	mA	$V_S = 0V$
I_{QCC}	Quiescent V_{CC} supply current	—	—	1		$V_O = 1V$
I_{OCC}	OC output sink current	10	—	—		$V_O = 0.1V$
		1	—	—		

AC Electrical Characteristics cont.


$V_{CC} = V_{BS} = 15V$, unless otherwise specified.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
Proagation delay characteristics						
t_{doc}	Propagation delay time of OC	1	1.5	—	μsec	
t_{woc}	Low true pulse width of OC	—	1	—		



Lead Definitions

Symbol	Description
VCC	Low side and logic supply voltage
COM	Low side logic ground
VIN+	Positive sense input
VIN-	Negative sense input
VB	High side supply
VS	High side return
OC	Overcurrent output (negative logic)
N.C.	No connection

Lead Assignments

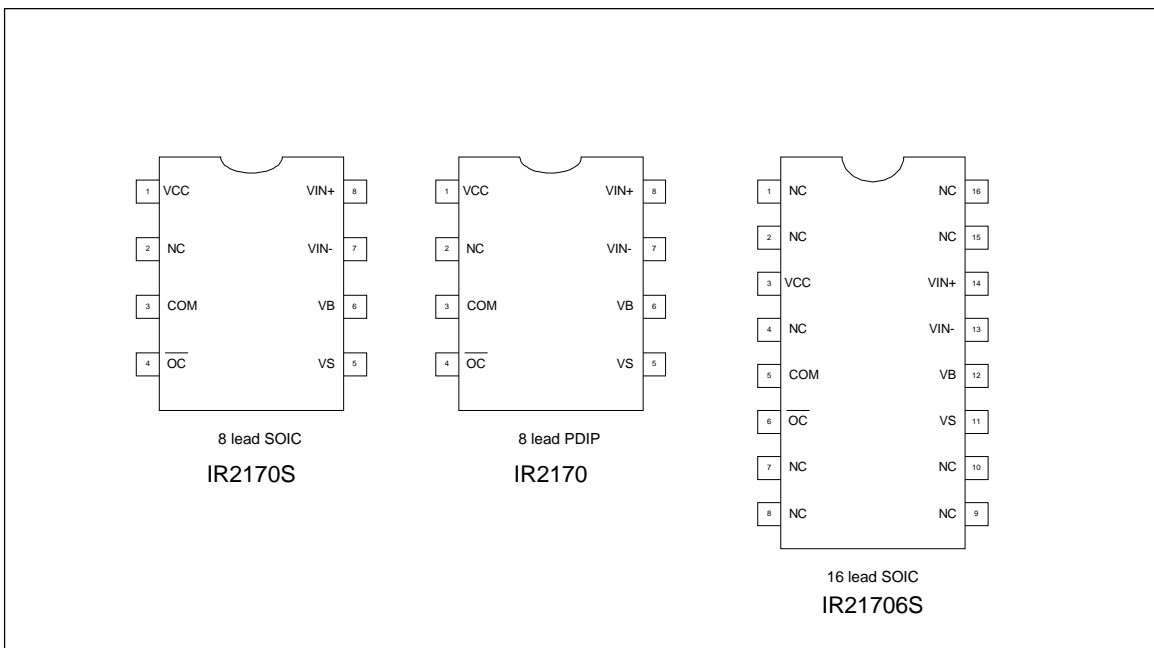


Case Outline - 8 Lead SOIC

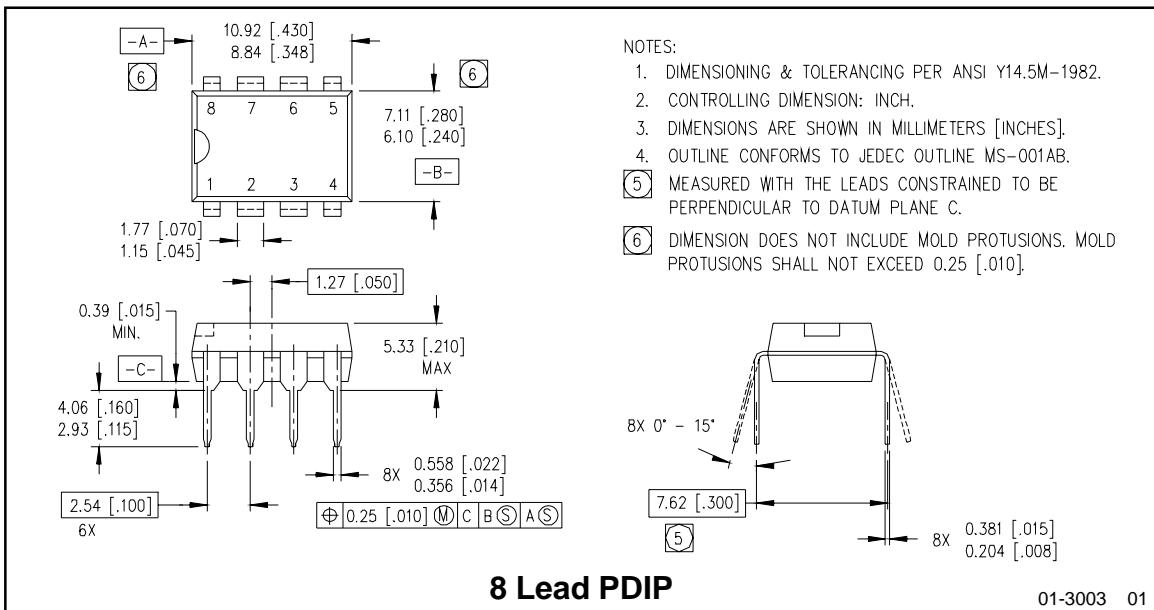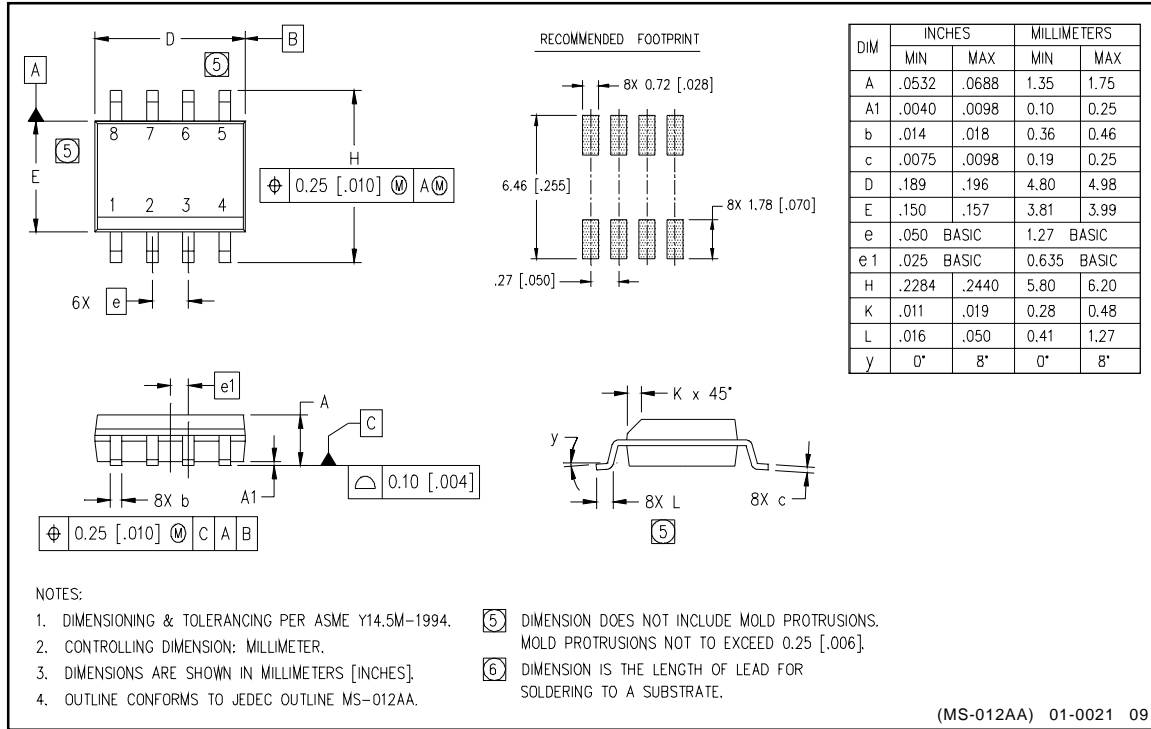

IR2170

ADVANCE INFORMATION

International
IR Rectifier

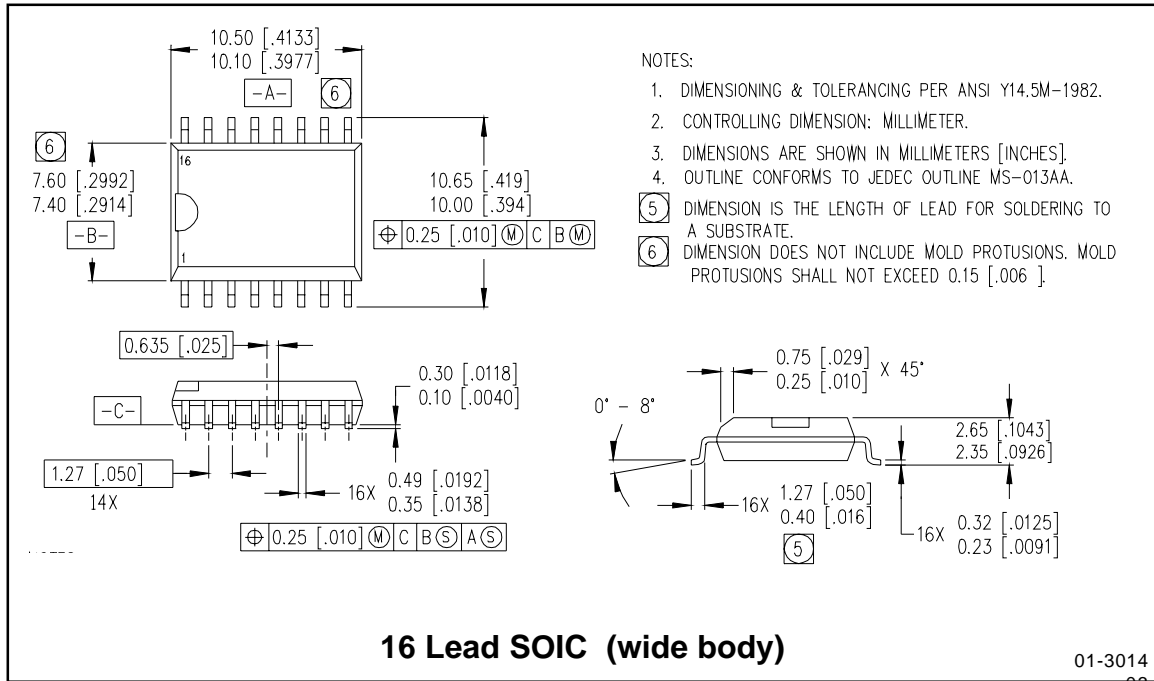

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
IR EUROPEAN REGIONAL CENTRE: 439/445 Godstone Rd., Whyteleafe, Surrey CR3 0BL, United Kingdom
Tel: ++ 44 (0) 20 8645 8000

International
IR Rectifier

Data and specifications subject to change without notice. 11/17/2000

www.irf.com