


Preliminary



SF2001B

**1960 MHz
SAW Filter**



SM3030-6

- **RF Filter for Mobile Communication Applications**
- **No Matching Circuit Required**
- **3.0 x 3.0 x 1.3 mm Package**

Absolute Maximum Ratings

Rating	Value	Units
Maximum Input Power	+20	dBm
DC voltage between Terminals	0	VDC
Case Temperature	-40 to +85	°C

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Nominal Operating Frequency	f_c			1960		MHz
Passband		Insertion Loss across 1930 -1990 MHz		2.9	4.0	dB
		Amplitude Ripple p-p across 1930 -1990 MHz		1.5	2.4	dB
Attenuation		D.C. ~ 1850 MHz	20.0	32.0		dB
		1850 -1910 MHz	10.0	21.0		dB
		2010 -2040 MHz	4.5	10.0		dB
		2040 -2070 MHz	20.0	25.0		dB
		2070 -5000 MHz	22.0	29.0		dB
		5000 -6000 MHz	10.0	15.0		dB
VSWR across 1930 to 1990 MHz				1.8	2.4	
Source impedance	Z_S			50		Ω
Load impedance	Z_L			50		Ω
Operating Temperature	T_A		-30		+85	°C

Case Style	SM3030-6 3 x 3 mm Nominal Footprint
Lid Symbolization (Y=year, WW=week S=shift)	461 YWWS

Electrical Connections

Connection	Terminals
Input	2
Output	5
Ground	All others



Notes:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_c .
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
9. ©Copyright 1999, RF Monolithics Inc.
10. Electrostatic Sensitive Device. Observe precautions for handling.



Frequency Characteristics:

Transfer Function:

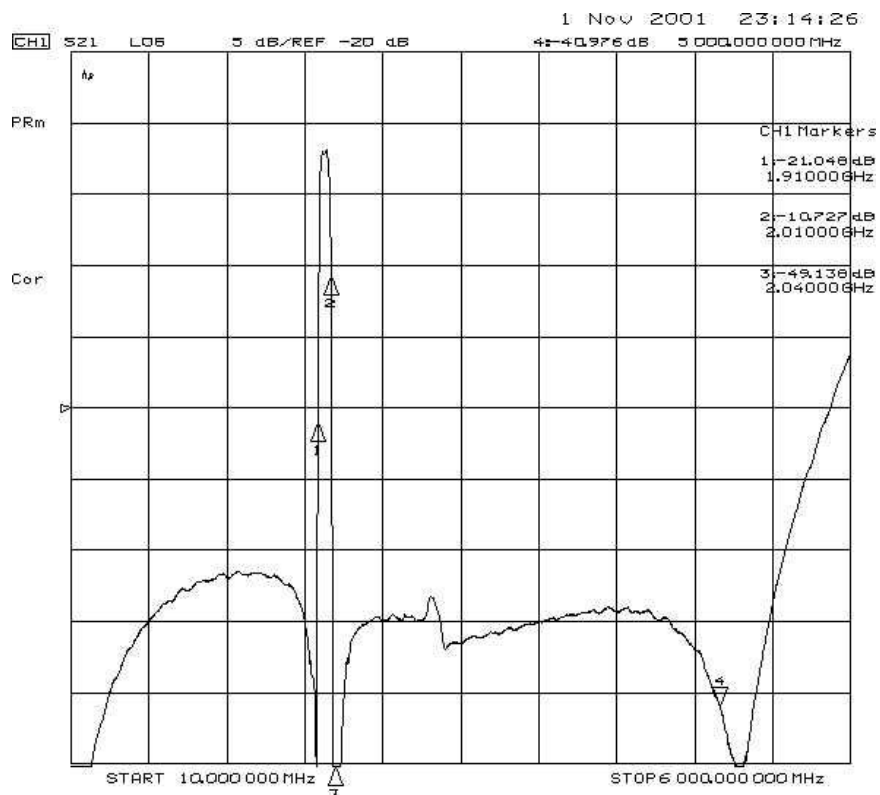
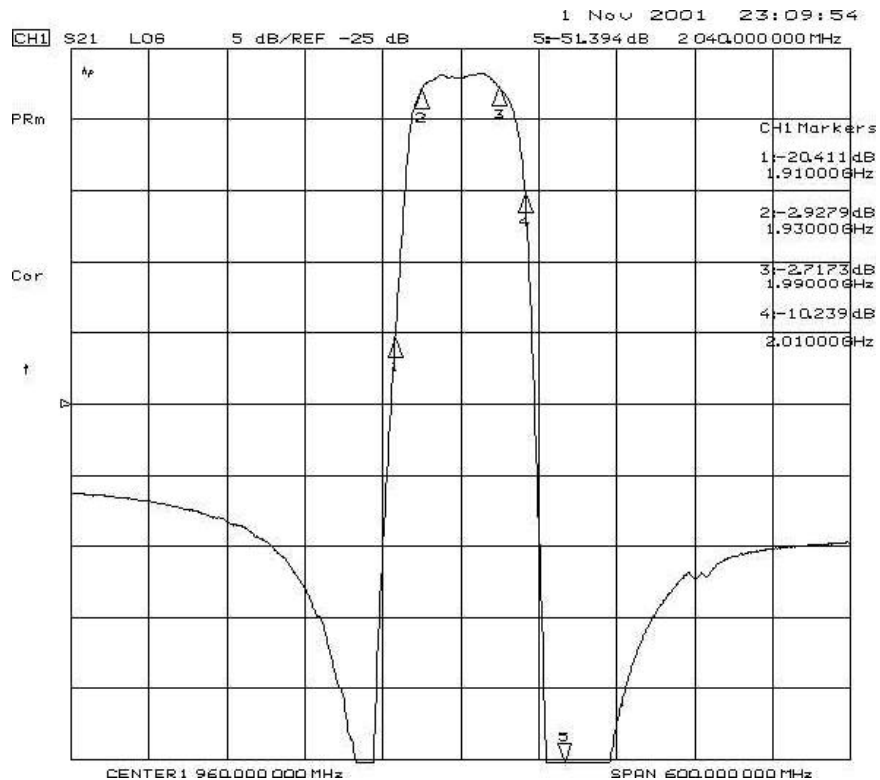


1960 MHz



SAW Filter

Reflections Functions:


S11 VSWR

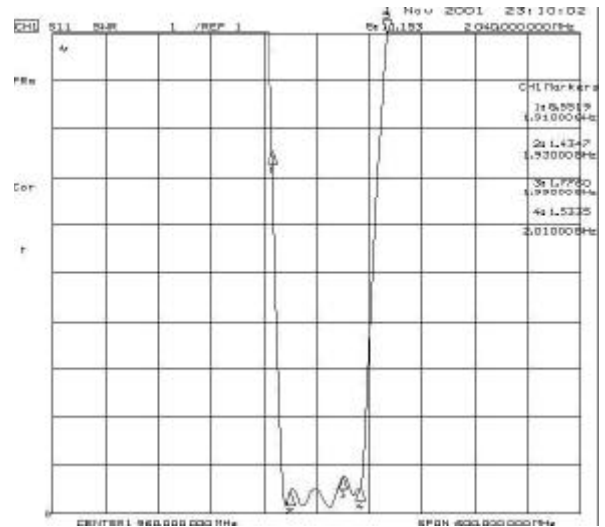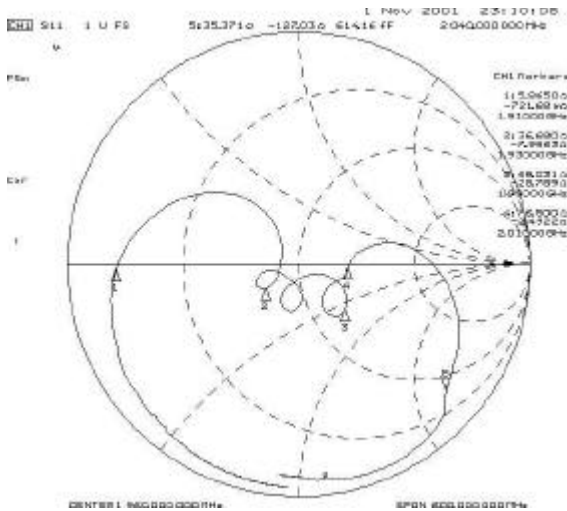


S22 VSWR

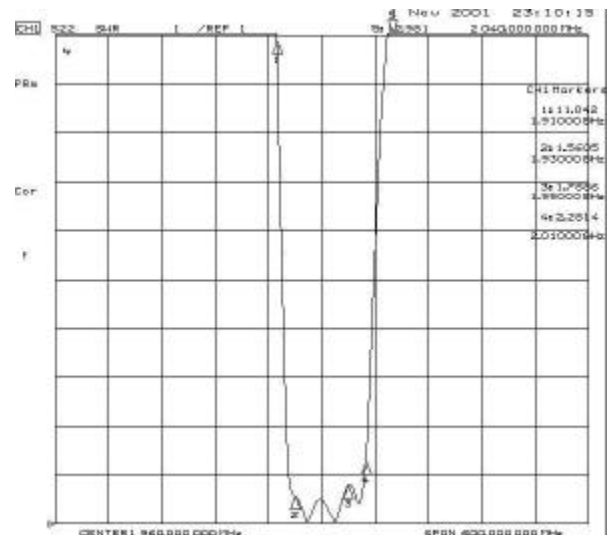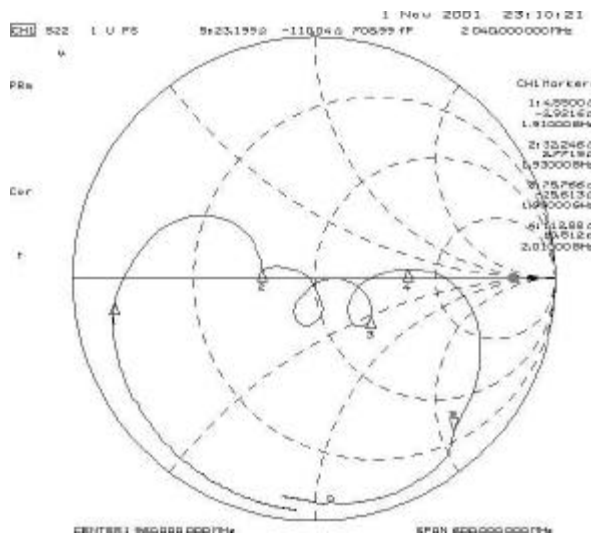


Tape and Reel Specifications

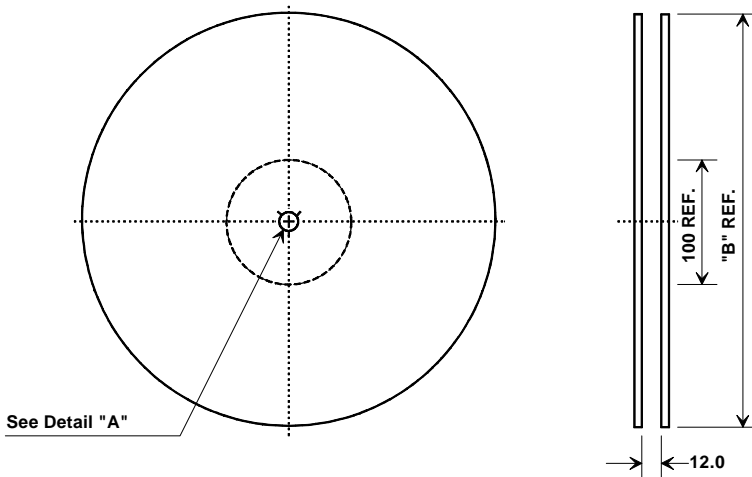

"B" Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	2000




COMPONENT ORIENTATION

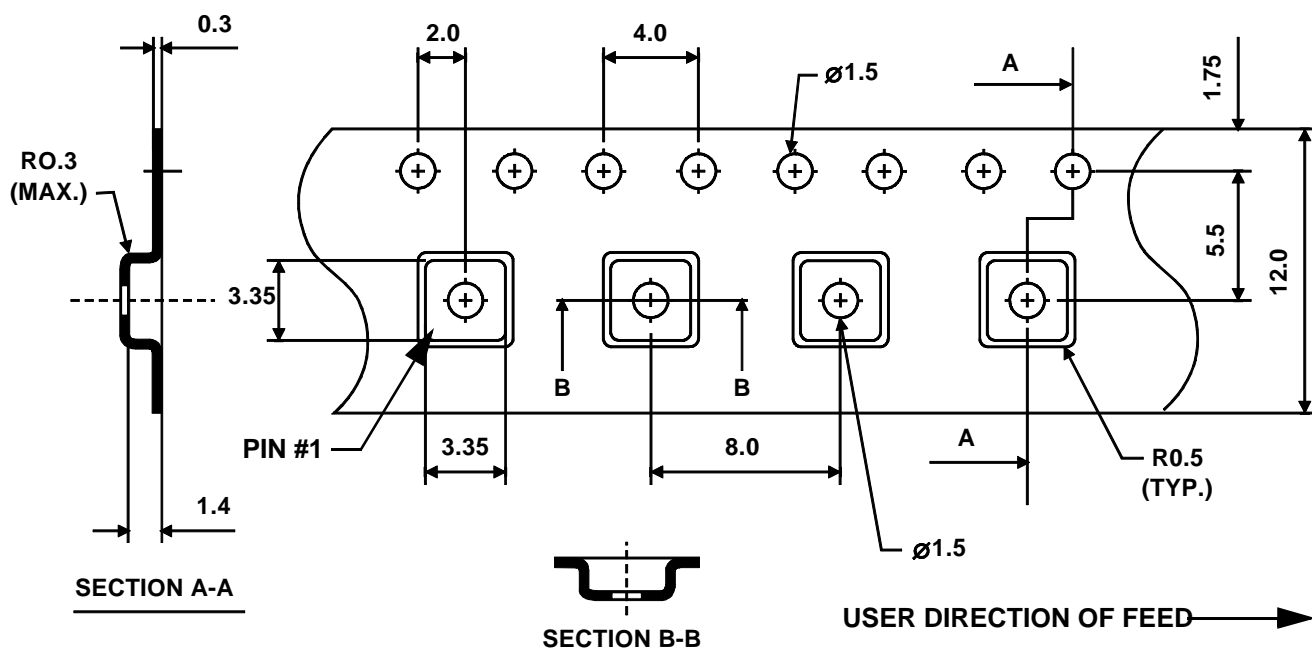

SM3030-6 Case

6-Terminal Ceramic Surface-Mount Case
3.0 X 3.0 mm Nominal Footprint




Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A		3.0			0.118	
B		3.0			0.118	
C		1.3			0.051	
D		0.9			0.035	
E		2.54			0.100	
F		1.6			0.063	
G		0.85			0.033	
H		1.5			0.059	
I		0.6			0.024	
J		1.3			0.051	

Electrical Connections

Connection		Terminals
Port 1	Single Ended Input	2
Port 2	Single Ended Output	5
	Ground	All others
Single Ended Operation Only		
Dot indicates Pin 1		

TOP VIEW

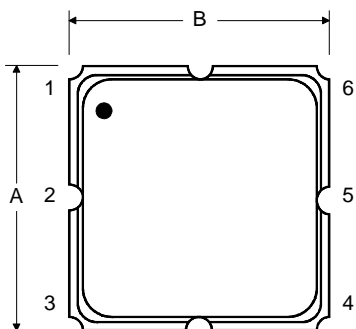

BOTTOM VIEW

